1400 SOUTH POTOMAC STREET

FIRE ALARM SYSTEM SHOP DRAWINGS FOR:

City of Aurora Building Division
Project: *Colorado Complete Health for Women*
Address: *1400 S Potomac St., Unit 215*
Occupancy Group: *IBC B*
Construction Type: *UBC Type II-N - SPK*
RSN: *1041526*
Permit: *2015-994486-LT*

BUILDING CLASSIFICATIONS AND CODES

OCCUPANCY GROUP:	B
USE:	OFFICE
CONSTRUCTION TYPE:	TYPE–II
STORIES:	2 FLOORS
SPRINKLERED:	FULLY
REQUIREMENTS:	MODIFIED PER 2009 IFC
CODES:	2009 IFC 2009 IBC 2009 IMC 2007 NFPA 72 2003 ANSI 17.1 ~~2005~~ 2014 NFPA 70

SYSTEM TYPE AND MONITORING

SYSTEM CLASSIFICATION:	(NFPA 72, CHAPTER 8), REMOTE STATION
SYSTEM TYPE:	CONVENTIONAL
WIRING CLASSIFICATION:	NAC – CLASS B IDC – CLASS B, STYLE B COMMUNICATION RISER – CLASS A
NOTIFICATION TYPE:	TEMPORAL PATTERN
MONITORING:	THIS SYSTEM IS AND WILL CONTINUE TO BE MONITORED BY A REMOTE SUPERVISING STATION, PER NFPA 72 CHAPTER 8, SECTION 2.
MONITORING COMPANY:	API (303)427–0880
ACCOUNT:	45–00–2941

DRAWING INFORMATION

FAS WORK ORDER #:	15011310
FAS CAD FILE:	COLORADO COMPLETE HEALTH FOR WOMEN

SCOPE OF WORK

1. RELOCATE ONE (1) HORN STROBE.
2. PROVIDE AND INSTALL THREE (3) HORN STROBES.
3. PROVIDE AND INSTALL EIGHT (8) STROBES.

INDEX

FA–00 COVER PAGE
GENERAL INFORMATION
BUILDING REQUIREMENTS AND CODES
FA–01 FIRE ALARM PLAN
LEGEND
MOUNTING HEIGHTS
GENERAL NOTES
KEY MAP
SEQUENCE OF OPERATIONS MATRIX
FA–02 CALCS/RISER
ONE–LINE RISER DIAGRAM
WIRE COLOR CODE CHART
VOLTAGE CALC
BOOSTER CALC

1. FIRE ALARM SYSTEMS CANNOT BE COMBINED WITH BURGLAR ALARM SYSTEMS.
2. THE INSTALLER IS REQUIRED TO COORDINATE WITH THE MECHANICAL CONTRACTOR TO DETERMINE INSTALLATION OF SMOKE DETECTORS OR SENSORS (I.E., NOT CLOSER THAN 3 FEET FROM ANY SUPPLY/RETURN DIFFUSER AND THAT ADDITIONAL DETECTION MAY BE REQUIRED DUE TO THE RELOCATION OR SPACING ADJUSTMENT OF DETECTORS, AS A RESULT).
3. FIRE ALARM DEVICES MUST BE PLACED IN PROTECTED AREAS WITH AMBIENT TEMPERATURE RANGING FROM 32 DEGREES TO 120 DEGREES F.
4. DO NOT PLACE SMOKE DETECTORS WITHIN 3 FEET OF AIR SUPPLY REGISTERS AND DIFFUSERS.
5. FIRE ALARM SYSTEM SHALL BE MONITORED BY A CLASS I CENTRAL STATION.
6. FIRE ALARM CONTROL PANEL WILL BE PLACED IN THE LOCATION SPECIFIED WITHIN THE PLAN SUBMITTAL UNLESS APPROVED BY THE LIFE SAFETY FIELD INSPECTOR.
7. CITY OF AURORA BUILDING DIVISION DOES NOT GRANT APPROVAL FOR ANY VIOLATIONS OF ADOPTED FIRE CODE. CODE VIOLATIONS UNCOVERED DURING FIELD INSPECTIONS MUST BE CORRECTED.
8. PER THE 2009 IFC AND THE 2014 NEC THE INSTALLER MUST REQUEST A ROUGH WIRING INSPECTION ON THE FIRE ALARM SYSTEM PRIOR TO REQUESTING A FIRE ALARM FINAL INSPECTION.
9. THE CONTRACTOR SHALL CONDUCT A "PRE–TEST" OF THE PROJECT AREA PRIOR TO SCHEDULING AN ACCEPTANCE TEST WITH THE BUILDING DIVISION.
10. REMOTE ALARM INDICATORS SHALL BE PROVIDED FOR ANY AUTOMATIC FIRE ALARM DETECTOR LOCATED IN A CONCEALED LOCATION WITH A NORMALLY LOCKED DOOR.
11. AT THE TIME OF FINAL FIRE ALARM INSPECTION, THE SYSTEM MUST BE SUPERVISED/MONITORED BY A CLASS I CENTRAL MONITORING AGENCY.
12. THE INSTALLING CONTRACTOR (OR DESIGNEE) MUST PROVIDE ALL NECESSARY TESTING EQUIPMENT AND PERFORM ALL TESTING REQUIRED BY THE LIFE SAFETY FIELD INSPECTOR.
13. IN–DUCT SMOKE DETECTORS INSTALLED IN CONCEALED LOCATIONS OR, WHERE THE DETECTORS ALARM INDICATOR IS NOT READILY VISIBLE TO RESPONDING PERSONNEL SHALL BE PROVIDED WITH A REMOTE INDICATOR(S), REMOTE TEST STATION AND PERMENANT PLACARDING.
14. ALL NEW OR EXISTING FIRE ALARM SYSTEMS MUST BE CONNECTED TO ANY EXTERIOR HORN AND STROBE DEVICE. IF THE BUILDING IS FIRE SPRINKLED, A GENERAL ALARM ACTIVATION AT THE FIRE ALARM CONTROL PANEL WILL ACTIVATE THE EXTERIOR HORN AND STROBE. SILENCING THE PANEL MUST ALLOW THE VISUAL DEVICE TO CONTINUE UNTIL THE PANEL IS RESET.
15. FIRE ALARM SYSTEMS SHALL INCLUDE BOTH AUDIBLE AND VISUAL ALARMS. VISUAL ALARMS WILL BE REQUIRED IN ALL ACCESSIBLE PUBLIC AND COMMON–USE AREAS PER THE 2009 IFC AND THE 2003 ANSI A117.1 STANDARD.
16. PROVIDE A PRIMARY AND SECONDARY POWER SUPPLY FOR THE FIRE ALARM SYSTEM PER THE 2009 IFC AND THE 2007 NFPA 72.
17. THE FIRE ALARM INSTALLATION CONTRACTOR MUST COMPLETE THE NFPA 72 "RECORD OF COMPLETION" PRIOR TO SCHEDULING THE AHJ ACCEPTANCE TEST.
18. FIELD INSPECTION CONSULTATION IS AVAILABLE UPON REQUEST. CALL 303-739-7420 TO REQUEST CONSULTATION.
19. AUDIBLE ALARM SIGNALING DEVICES SHALL EXCEED THE PREVAILING SOUND LEVEL IN A ROOM OR SPACE BY 15 DBA. SOUND LEVELS FOR ALARM SIGNALS SHALL BE 120 DBA MAXIMUM. IFC SECTION 907.10.2.

PROJECT:

COLORADO COMPLETE HEALTH FOR WOMEN
1400 SOUTH POTOMAC STREET, SUITE 215
AURORA, CO 80012

GENERAL CONTRACTOR:

CODA CONSTRUCTION GROUP, LLC
1777 SOUTH BELLAIRE STREET, SUITE 480
DENVER, CO 80222
PH:(720)250–8272
FAX:(303)757–3083
MARK STRATTON

ELECTRICAL CONTRACTOR:

FIRE ALARM SERVICES, INC.
4800 W. 60TH AVENUE
ARVADA, CO 80003
PH:(303)466–8800
FAX:(303)466–8820
SHANNON SMITH

ARCHITECT:

APS DESIGN AND PLANNING
DENVER, CO
PH:(303)817–4464

FIRE ALARM DESIGNER:

FIRE ALARM SERVICES, INC.
4800 W. 60TH AVENUE
ARVADA, CO 80003
PH:(303)466–8800
FAX:(303)466–8820

Fire Alarm SERVICES, INC.

Fire Alarm Services, Inc.
4800 W. 60th Avenue
Arvada, CO 80003

(303)466–8800 (Phone)
(303)466–8820 (Fax)
contactus@fasonline.cc (E–Mail)
www.fasonline.cc

GENERAL NOTES

1. FIRE ALARM SYSTEMS CANNOT BE COMBINED WITH BURGLAR ALARM SYSTEMS.
2. THE INSTALLER IS REQUIRED TO COORDINATE WITH THE MECHANICAL CONTRACTOR TO DETERMINE INSTALLATION OF SMOKE DETECTORS OR SENSORS (I.E., NOT CLOSER THAN 3 FEET FROM ANY SUPPLY/RETURN DIFFUSER AND THAT ADDITIONAL DETECTION MAY BE REQUIRED DUE TO THE RELOCATION OR SPACING ADJUSTMENT OF DETECTORS, AS A RESULT).
3. FIRE ALARM DEVICES MUST BE PLACED IN PROTECTED AREAS WITH AMBIENT TEMPERATURE RANGING FROM 32 DEGREES TO 120 DEGREES F.
4. DO NOT PLACE SMOKE DETECTORS WITHIN 3 FEET OF AIR SUPPLY REGISTERS AND DIFFUSERS.
5. FIRE ALARM SYSTEM SHALL BE MONITORED BY A CLASS 1 CENTRAL STATION.
6. FIRE ALARM CONTROL PANEL WILL BE PLACED IN THE LOCATION SPECIFIED WITHIN THE PLAN SUBMITTAL UNLESS APPROVED BY THE LIFE SAFETY FIELD INSPECTOR.
7. CITY OF AURORA BUILDING CODES DIVISION DOES NOT GRANT APPROVAL FOR ANY VIOLATIONS OF ADOPTED FIRE CODE. CODE VIOLATIONS UNCOVERED DURING FIELD INPECTIONS MUST BE CORRECTED.
8. PER THE 2009 IFC AND THE ~~2008~~ 2014 NEC THE INSTALLER MUST REQUEST A ROUGH WIRING INSPECTION ON THE FIRE ALARM SYSTEM PRIOR TO REQUESTING A FIRE ALARM FINAL INSPECTION.
9. THE CONTRACTOR SHALL CONDUCT A "PRE–TEST" OF THE PROJECT AREA PRIOR TO SCHEDULING AN ACCEPTANCE TEST WITH THE BUILDING CODES DIVISION.
10. REMOTE ALARM INDICATORS SHALL BE PROVIDED FOR ANY FIRE ALARM DETECTOR LOCATED IN A CONCEALED LOCATION WITH A NORMALLY LOCKED DOOR.
11. AT THE TIME OF FINAL FIRE ALARM INSPECTION, THE SYSTEM MUST BE SUPERVISED/MONITORED BY A CLASS 1 CENTRAL MONITORING AGENCY.
12. THE INSTALLING CONTRACTOR (OR DESIGNEE) MUST PROVIDE ALL NECESSARY TESTING EQUIPMENT AND PERORM ALL TESTING REQUIRED BY THE LIFE SAFETY FIELD INSPECTOR.
13. IN–DUCT SMOKE DETECTORS INSTALLED IN CONCEALED LOCATIONS OR, WHERE THE DETECTORS ALARM INDICATOR IS NOT READILY VISIBLE TO RESPONDING PERSONNEL SHALL BE PROVIDED WITH A REMOTE INDICATOR, REMOTE TEST STATION AND PLACARDING.
14. ALL NEW OR EXISTING FIRE ALARM SYSTEMS MUST BE CONNECTED TO ANY EXTERIOR HORN AND STROBE DEVICE. IF THE BUILDING IS FIRE SPRINKLED, A GENERAL ALARM ACTIVATION AT THE FIRE ALARM CONTROL PANEL WILL ACTIVATE THE EXTERIOR HORN AND STROBE. SILENCING THE PANEL MUST ALLOW THE VISUAL DEVICE TO CONTINUE UNTIL THE PANEL IS RESET.
15. FIRE ALARM SYSTEMS SHALL INCLUDE BOTH AUDIBLE AND VISUAL ALARMS. VISUAL ALARMS WILL BE REQUIRED IN ALL ACCESSIBLE PUBLIC AND COMMON– USE AREAS PER THE 2009 IFC AND THE 2003 ANSI A117.1 STANDARD.
16. PROVIDE A PRIMARY AND SECONDARY POWER SUPPLY FOR THE FIRE ALARM SYSTEM PER THE 2009 IFC, SECTION 907.5 AND THE 2007 NFPA 72.

City of Aurora Building Division
Reviewed for Code Compliance
Approved as Noted: *John J Van Essen*
Date: *Aug 20, 2015*
2009 INTERNATIONAL CODES & 2014 NEC
2007 NFPA 72
RSN: *1041526*
Permit #: *2015-994486-LT*

Steven Sprague
NICET Fire Alarm Systems
Level III
Certification #137416
Date: 8-5-15

Fire Alarm SERVICES, INC.
4800 W. 60TH AVENUE
ARVADA, CO 80003
phone: 303–466–8800
fax: 303–466–8820
www.fasonline.cc email: contactus@fasonline.cc

REVISIONS	NO.	DATE

DRAWN BY: L. BACON
DATE: 8/5/2015
APPR. BY:
DATE: 8/5/15

PROJECT TITLE: FIRE ALARM SYSTEM TENANT FINISH FOR: COLORADO COMPLETE HEALTH FOR WOMEN
BUILDING NAME & ADDRESS: 1400 SOUTH POTOMAC STREET
1400 S. POTOMAC ST.
AURORA, CO 80012
PROJECT NUMBER: 15011310

FIRE ALARM & DETECTION SYSTEM
DRAWING TITLE: SUITE 215 COVER PAGE
SCALE: N/A

PROJECT SHEET TITLE
FA–00

City of Aurora Building Division
Project: *Colorado Complete Health for Women*
Address: *1400 S Potomac St., Unit 215*
Occupancy Group: *IBC B*
Construction Type: *UBC Type II-N - SPK*
RSN: *1041526*
Permit: *2015-994486-LT*

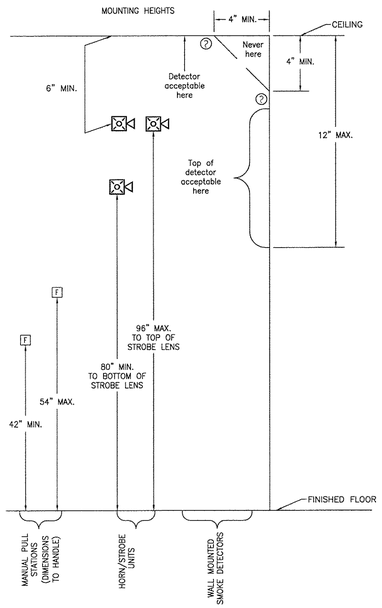



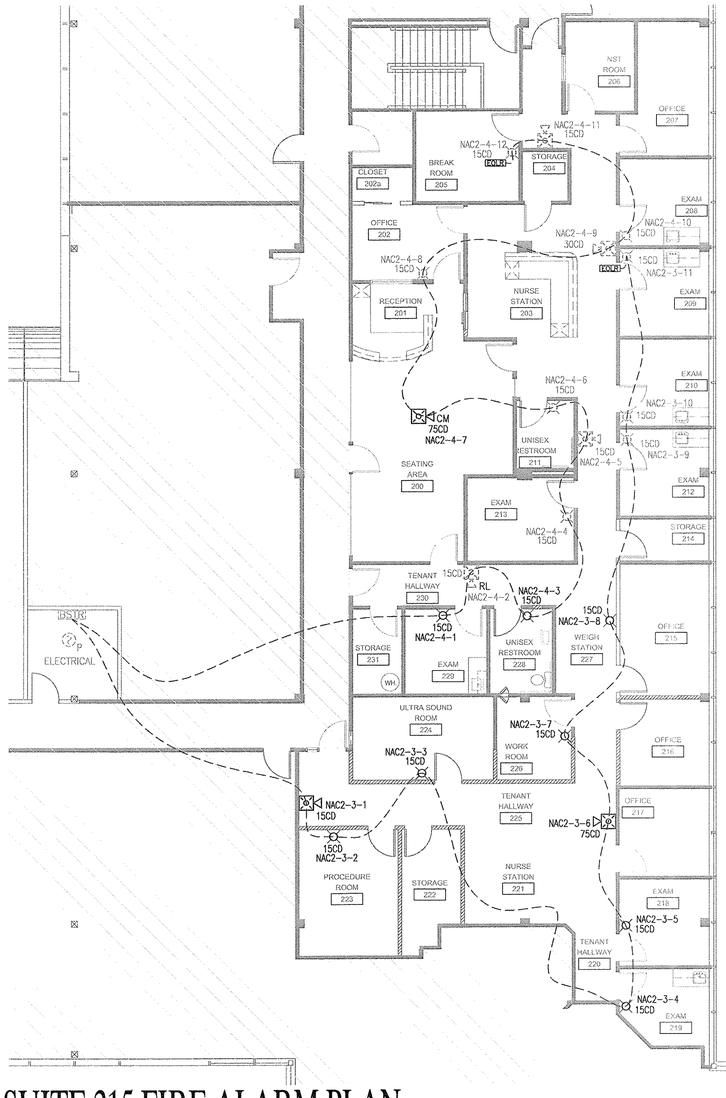

SUITE 215 FIRE ALARM PLAN

SCALE: 1/8" = 1'-0"

NORTH 0 5 10 15 30 FEET

FIRE ALARM SYMBOLS LEGEND

EXISTING	DESCRIPTION	PROPOSED
	STROBE – Wall Mount or CM = Ceiling Mount	
	SMOKE DETECTOR – x = photo, ion	
	HORN STROBE – Wall Mount or CM = Ceiling Mount	
	END OF LINE RESISTOR	
	PULL STATION	
	HEAT DETECTOR – x =135, 200, ROR	
	TAMPER SWITCH	
	FLOW SWITCH	
	MONITOR–MODULE	

NOTIFICATION APPLIANCE CIRCUIT NUMBER — DEVICE NUMBER
NOTIFICATION APPLIANCE PANEL NUMBER
NAC1-2-3
POWER EXPANDER NUMBERING

J = J–BOX
RL = RELOCATED DEVICE

1400 S. POTOMAC BUILDING SEQUENCE OF OPERATIONS

SYSTEM INPUTS

SYSTEM OUTPUTS

		FACP Annunciation								Notification			FSC			Monitoring			
		Actuate Common Alarm Signal Indication	Actuate Audible Alarm Signal	Actuate Common Supervisory Signal Indication	Actuate Audible Supervisory Signal	Actuate Common Trouble Signal Indication	Actuate Audible Common Trouble Signal	Display Change of Status	Actuate 1st Floor Evacuation Signals (Horn/Strobes)	Actuate 2nd Floor Evacuation Signals (Horn/Strobes)	Actuate Exterior Horn/Strobe	Silence Audible Signal (Horns)	Release Magnetically Held Smoke Doors	Recall Elevator(s) to 1st Floor – Primary Recall	Recall Elevator(s) to 2nd Floor – Alternate Recall	Transmit Fire Alarm Signal to Supervising Station	Transmit Trouble Signal to Supervising Station	Transmit Supervisory Signal to Supervising Station	Transmit Waterflow Signal to Supervising Station	
SYSTEM INPUTS		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	
1	Manual Pull Station – 1st Floor	X	X					X	X	X	X		X			X				1
2	Manual Pull Station – 2nd Floor	X	X					X	X	X	X		X			X				2
3	Smoke Sensor – 1st Floor Elev Lobby	X	X					X	X	X	X		X		X	X				3
4	Smoke Sensor – 2nd Floor Elev Lobby	X	X					X	X	X	X		X	X		X				4
5	Smoke Sensor – All Other Locations	X	X					X	X	X	X		X			X				5
6	Heat Sensors – 1st Floor	X	X					X	X	X	X		X			X				6
7	Sprinkler Waterflow – 1st Floor	X	X					X	X	X	X		X			X			X	7
8	Sprinkler Waterflow – 2nd Floor	X	X					X	X	X	X		X			X			X	8
9	Sprinkler Control Valve			X	X			X										X		9
10	FACP AC Power Failure					X	X	X					X				X			10
11	FACP Low Battery					X	X	X									X			11
12	Open Circuit					X	X	X									X			12
13	Ground Fault					X	X	X									X			13
14	Notification Appliance Circuit Short					X	X	X									X			14
15	Alarm Signal Silence											X								15
	FSC = Fire Safety Control	A	B	C	D	E	F	G	H	I	K	L	M	N	O	R	S	T	U	

City of Aurora Building Division
Reviewed for Code Compliance
Approved as Noted: *John J Van Essen*
Date: *Aug 20, 2015*
2009 INTERNATIONAL CODES & 2014 NEC
2007 NFPA 72
RSN: *1041526*
Permit #: *2015-994486-LT*

GENERAL NOTES:

1. THE CEILING IS A TYPICAL 9' A.F.F. DROPPED CEILING WITH NO SLOPES.

Steven Sprague
NICET Fire Alarm Systems
Level III
Certification #137416
Date: 8/31/15

Fire Alarm Services, Inc.
4600 W. 60TH AVENUE
ARVADA, CO 80003
phone: 303-466-8800
fax: 303-466-8820
www.fasonline.cc email: contactus@fasonline.cc

NO.	DATE	REVISIONS

DRAWN BY: L. BACON — DATE: 8/5/2015
APPR BY: — DATE: 8/31/15

PROJECT TITLE: FIRE ALARM SYSTEM TENANT FINISH FOR: COLORADO COMPLETE HEALTH FOR WOMEN
BUILDING NAME & ADDRESS: 1400 S. POTOMAC, 1400 S. POTOMAC ST., AURORA, CO 80012
PROJECT NUMBER: 15011310

DRAWING TITLE: FIRE ALARM & DETECTION SYSTEM
SUITE 215 FIRE ALARM PLAN
SCALE: AS SHOWN

PROJECT SHEET TITLE
FA–01

City of Aurora Building Division
Project: *Colorado Complete Health for Women*
Address: *1400 S Potomac St., Unit 215*
Occupancy Group: *IBC B*
Construction Type: *UBC Type II-N - SPK*
RSN: *1041526*
Permit: *2015-994486-LT*

BOOSTER CALCULATIONS

FOR: 1400 S. POTOMAC ST.
AURORA, CO 80012

HOURS OF SUPERVISION: 24 HOURS
MINUTES OF ALARM: 5 MINUTES

PANEL: EST BPS-8A

ITEM	QTY	PART NUMBER	DESCRIPTION	Device Supervisory Current	Device Alarm Current	Total Supervisory Current	Total Alarm Current
1	1	EXISTING	Notification Booster Panel	0.070000	0.190000	0.070000	0.190000
			TOTAL:			0.070000	0.190000

PERIPHERAL:

ITEM	QTY	PART NUMBER	DESCRIPTION	Device Supervisory Current	Device Alarm Current	Total Supervisory Current	Total Alarm Current
1	14	EXISTING	15cd Strobe	0.000000	0.103000	0.000000	1.442000
2	7	EXISTING	15cd Horn/Strobe	0.000000	0.129000	0.000000	0.903000
3	2	EXISTING	30cd Horn/Strobe	0.000000	0.167000	0.000000	0.334000
4	13	EXISTING	15cd Ceiling Mt. Strobe	0.000000	0.109000	0.000000	1.417000
5	1	EXISTING	75cd Ceilng Mt. Strobe	0.000000	0.281000	0.000000	0.281000
6	1	EXISTING	15cd Ceiling Mt. Horn/Strobe	0.000000	0.147000	0.000000	0.147000
7	4	EXISTING	30cd Ceilnig Mt. Horn/Strobe	0.000000	0.190000	0.000000	0.760000
8	1	EXISTING	75cd Ceiling Mt. Horn/Strobe	0.000000	0.316000	0.000000	0.316000
9	8	G1RF-VM	15cd Strobe	0.000000	0.103000	0.000000	0.824000
10	1	G1RF-HDVM	15cd Horn/Strobe	0.000000	0.129000	0.000000	0.129000
11	1	G1RF-HDVM	75cd Horn/Strobe	0.000000	0.281000	0.000000	0.281000
12	1	GCF-HDVM	75cd Ceiling Mt. Horn/Strobe	0.000000	0.316000	0.000000	0.316000
			TOTAL:			0.000000	7.150000

SUPERVISORY:		
PANEL:	0.070000	AMPS
PERIPHERAL	0.000000	AMPS
SUB-TOTAL:	0.070000	AMPS
X HOURS OF SUPERVISORY:	24.0000	HOURS
SUB-TOTAL:	1.680000	AMP HOURS
ALARM:		
PANEL:	0.190000	AMPS
PERIPHERAL:	7.150000	AMPS
SUB-TOTAL:	7.340000	AMPS
X MINUTES OF ALARM:	0.08333	HOURS
SUB-TOTAL:	0.611667	AMP HOURS
TOTALS:		
TOTAL SUPERVISORY:	1.680000	AMP HOURS
TOTAL ALARM:	0.611667	AMP HOURS
TOTAL:	2.291667	AMP HOURS
TOTAL PLUS SAFETY FACTOR(20%)	2.75000	AMP HOURS
Batteries Supplied - 1 Set of:	7.00000	AMP HOURS

INCREMENTAL VOLTAGE DROP CALCULATIONS FOR AUDIBLE/ VISUAL CIRCUITS
MINIMUM UL RATED VOLTAGE: 16 VOLTS
Current shown in calculations is RMS current at 16 volts.

Resistance	12 Gauge	2.01
	14 Gauge	3.19
	16 Gauge	5.08

Circuit Number: NAC2-3
Location: 2ND FLOOR BOOSTER PANEL — INPUT VOLTAGE = 20.4 VOLTS

Notification Circuit	Current (in amps)	Wire Distance (in feet)	Total Distance (in feet)	Wire Size (AWG)	Resistance (Ohms)	Voltage Drop	From Baseline Voltage
Horn/Strobe 15CD	0.129	43	43	14	0.2743	0.3671	20.0329
Strobe 15CD	0.103	16	59	14	0.1021	0.1234	19.9095
Strobe 15CD	0.103	25	84	14	0.1595	0.1764	19.7331
Strobe 15CD	0.103	57	141	14	0.3637	0.3648	19.3684
Strobe 15CD	0.103	19	160	14	0.1212	0.1091	19.2593
Horn/Strobe 75CD	0.281	21	181	14	0.1340	0.1068	19.1525
Strobe 15CD	0.103	24	205	14	0.1531	0.0790	19.0735
Strobe 15CD	0.103	27	232	14	0.1723	0.0711	19.0023
Strobe 15CD	0.103	30	262	14	0.1914	0.0593	18.9430
Strobe 15CD	0.103	12	274	14	0.0766	0.0158	18.9271
Strobe 15CD	0.103	27	301	14	0.1723	0.0179	18.9092
End of Line Resistor	0.001	0	301	14	0.0000	0.0000	18.9092
Totals:	1.338	301			1.9204	1.4908	18.9092
Total Devices:	11						

Circuit Number: NAC2-4
Location: 2ND FLOOR BOOSTER PANEL — INPUT VOLTAGE = 20.4 VOLTS

Notification Circuit	Current (in amps)	Wire Distance (in feet)	Total Distance (in feet)	Wire Size (AWG)	Resistance (Ohms)	Voltage Drop	From Baseline Voltage
Strobe 15CD	0.103	51	51	14	0.3254	0.5180	19.8820
Horn/Strobe 15CD	0.129	18	69	14	0.1148	0.1710	19.7110
Strobe 15CD	0.103	21	90	14	0.1340	0.1822	19.5288
Strobe 15CD	0.103	23	113	14	0.1467	0.1845	19.3443
Horn/Strobe 15CD	0.129	20	133	14	0.1276	0.1473	19.1971
Strobe 15CD	0.103	15	148	14	0.0957	0.0981	19.0990
CM Horn/Strobe 75CD	0.316	25	173	14	0.1595	0.1471	18.9519
Strobe 15CD	0.103	26	199	14	0.1659	0.1005	18.8514
Horn/Strobe 30CD	0.167	34	233	14	0.2169	0.1091	18.7423
Strobe 15CD	0.103	11	244	14	0.0702	0.0236	18.7187
Horn/Strobe 15CD	0.129	29	273	14	0.1850	0.0431	18.6756
Strobe 15CD	0.103	14	287	14	0.0893	0.0093	18.6663
End of Line Resistor	0.001	0	287	14	0.0000	0.0000	18.6663
Totals:	1.592	287			1.8311	1.7337	18.6663
Total Devices:	12						

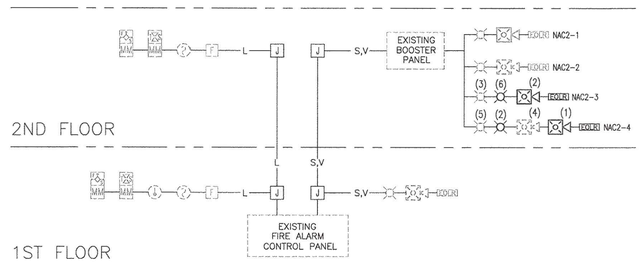

ONE-LINE RISER DIAGRAM

FIRE ALARM WIRE COLOR CODE CHART				
Code	Description	Wire Type	Color (+)	Color (-)
AC	120VAC Power Wiring	3#12 AWG Solid (w/ Green Ground)	Black (hot)	White (neu)
A	Annunciator Wiring	#18 AWG Twisted/Shielded Pair	Red	Black
D	Door Holder Wiring	2#14 AWG Solid	Red	Black
L	SLC Wiring (Signaling Line Circuit)	2#18 AWG Solid	Red	Black
P	24VDC Power Wiring	2#16 AWG Solid	Red	Black
R	Remote Light/Test Wiring	2#18 AWG Solid	Red	Black
S	Notification Appliance (Horns) Wiring	2 or 4#14 AWG Solid	Red	Black
S	Notification Appliance (Speaker) Wiring	2#16 AWG Twisted/Shielded Pair	Red	Black
T	Telephone Circuit Wiring	2#16 AWG Twisted/Shielded Pair	Red	Black
V	Notification Appliance (Strobe) Wiring	2 or 4#14 AWG Solid	Red	Black
X	Auxiliary Circuit (Relay) Wiring	2#14 AWG Solid	Red	Black
Z	IDC Wiring (Initiating Device Circuit)	2#18 AWG Solid	Red	Black
WIRE TYPE CLASS & STYLE	SLC - CLASS B - STYLE 4	NAC - CLASS B		

City of Aurora Building Division
Reviewed for Code Compliance
Approved as Noted: *John J Van Essen*
Date: *Aug 20, 2015*
2009 INTERNATIONAL CODES & 2014 NEC
2007 NFPA 72
RSN: *1041526*
Permit #: *2015-994486-LT*

Steven Sprague
NICET Fire Alarm Systems
Level III
Certification #137416
Date: 8-5-15

Fire Alarm SERVICES, INC.
4800 W. 60TH AVENUE phone: 303-466-8800
ARVADA, CO 80003 fax: 303-466-8820
www.fasonline.cc email: contactus@fasonline.cc

REVISIONS | NO. | DATE

DRAWN BY: L. BACON DATE: 8/5/2015
APPR. BY: DATE: 8/5/15

FIRE ALARM SYSTEM TENANT FINISH FOR:
COLORADO COMPLETE HEALTH FOR WOMEN

PROJECT TITLE
BUILDING NAME & ADDRESS: 1400 S. POTOMAC
1400 S. POTOMAC ST.
AURORA, CO 80012
PROJECT NUMBER: 15011310

FIRE ALARM & DETECTION SYSTEM

DRAWING TITLE:
SUITE 215
CALCS/RISER

SCALE: N/A

PROJECT SHEET TITLE
FA-02

Fire Alarm System Acceptance Inspection

2009 IFC and 2007 NFPA 72

This worksheet is for jurisdictions that permit the use of 2007 NFPA 72 in lieu of IFC's referenced 2002 NFPA 72.

Date of Inspection: _____ Permit Number: 2015-994486-LT

Business/Building Name: Colorado Complete Health for Women Address of Project: 1400 S Potomac St., Unit 215

Contractor: FIRE ALARM SERVICES INC Contractor's Phone: 303-466-8800

Reference numbers following worksheet statements represent an NFPA code section unless otherwise specified.

	Pass	Fail	NA	General
1.				Obtained a copy of the fire alarm installation certification and a Record of Completion from installer, 4.5.2.1.
2.				Approved plans are on site.
3.				Fire alarm control unit (FACU) and remote annunciator (RA) are installed consistent with approved plans, 4.4.6.1.1. and 7.10.
4.				A zone and legend map is provided at the RA or an approved location.
5.				Fire alarm zones are properly identified on the FACU and RA panels.
6.				The fire alarm system power supply is a dedicated 120 AC branch circuit, which is labeled, 4.4.1.4.2.2.
7.				Type and gauge of wire or cable(s) for each circuit are consistent with the plans.
8.				Device location and installation are consistent with the plans.
9.				Pull stations are installed at the proper height and location, 42 in. to 48 in. and within the 200 ft. maximum travel distance, 5.13 and IFC 907.5.2.1 and 907.5.2.2.
10.				A Contractor Sound Pressure Level (dBA) Pretest Room Log is provided and verified with the use of a sound meter during a sound pressure test.
Operational				
11.				Fire alarm audible notification devices sound throughout the occupancy providing a sound pressure level at least a minimum of 15 dBA above the average ambient noise level or 5 dBA above the maximum noise level. For bedrooms with closed door provide at least 75 dBA at the pillow, 7.4.4.1, IFC 907.6.2.1.1.
12.				Fire alarm audible devices are a three-pulse temporal pattern unless they were permitted to match existing audible devices, 6.8.6.5.1.
13.				Fire alarm visual notification device intensity (cd) ratings and settings, mounting height (80 in. to 96 in.), and location, are consistent with the plans, 7.5.4.1.
14.				Emergency voice/ alarm communications systems is tested and documentation is provided documenting the verbal statement(s) are distinguishable and understandable, Table 10.4.2.2.15(b).
15.				In sprinklered buildings, the fire alarm notification devices will activate by operation of the sprinkler flow alarm.
16.				HVAC duct detectors are supervised by the fire alarm system, detectors are all tested to verify if they can sample the air stream, fans shut down upon activation and visual and audible status alarm functions, Table 10.4.2.2.14(g).
17.				A central, remote or proprietary monitoring service received various signals during system tests.
18.				Verify that the correct and distinctive signals are received (alarm, trouble, and supervisory alarms), 4.4.3.3, 10.4.1.1
19.				Two monitoring circuits are provided, both circuits send correct signals to monitoring company within 90 seconds, Table 10.4.2.2.16.
20.				Verify proper operation of magnetic door-releasing hardware and/or ventilation shutdown.
21.				Sprinkler tamper switch activation transmits a trouble signal at the annunciator panel.
22.				Fire department communications system, if provided, is operational.
23.				For air sampling and flame detectors, test the device in accordance with the manufacturer's instructions.
24.				Restoreable heat and smoke detectors, and pull stations are tested.
25.				Trouble condition is created for each circuit and the FACU responds appropriately.
26.				Remote annunciator displays the correct zone and device information.

27. ____|____ | ____ Battery load test: the system is switched to battery operation 24 hours before the test and in the presence of the inspector the notification devices are activated and operate for 5 minutes or 15 minutes for emergency voice alarms.
28. ____|____ | ____ Check battery charger, measure load voltage, and open circuit voltage.
29. ____|____ | ____ Test ground-fault monitoring circuit, if provided.
30. ____|____ | ____ Under primary and secondary power, perform these tests:
    - ____|____ | ____ A. power light on and in normal condition, trouble signal when on secondary power.
    - ____|____ | ____ B. supervisory signals: fire pump power loss or phase reversal, water level/temp, pressure switches, control valves, etc.
    - ____|____ | ____ C. silence switch functions.
    - ____|____ | ____ D. a 2nd alarm initiating zone overrides silence switch.
    - ____|____ | ____ E. trouble signals and FACU panel lights operate for each circuit tested; disconnect .wires from devices and primary power supply to simulate trouble conditions.
    - ____|____ | ____ F. on secondary power, measure standby and alarm current demand.
    - ____|____ | ____ G. trouble and alarm reset switches operate.
    - ____|____ | ____ H. emergency voice alarms: the message is clear and distinct.
    - ____|____ | ____ I. initiating devices tested, audible sound pressure levels, and visuals operate.
    - ____|____ | ____ J. panel lamp test switch operates: if provided.
    - ____|____ | ____ K. field zones and device address signals corresponded with panel zones and addresses.
    - ____|____ | ____ L. elevator(s) recall to designated floor and alternate floor in accordance with 6.16.3.
31. ____|____ | ____ Other systems activate fire alarm: kitchen hood suppression system, clean agent, etc.
32. ____|____ | ____ As-builts are required when system installation is not consistent with the plans.
33. ____|____ | ____ Circuit loop resistance is within specifications and a test may be required if the system wiring has changed from the plans.
34. ____|____ | ____ Heat and spot smoke detectors are not within 4 in. of the sidewall, or if on the sidewall, the detector is 4 in. to 12 in. from the ceiling, 5.6.3.1, 5.7.3.2.1.
35. ____|____ | ____ Visual devices in a room or adjacent space with more than 2 devices within the field of view the flash are synchronized, 7.5.4.1.2(3). Devices in a corridor with more than 2 devices within the field of view and a maximum spacing of 100 ft., are synchronized, 7.5.4.2.5 and 7.5.4.2.7.
36. ____|____ | ____ Visual devices are wall mounted 80 in. to 96 in. above the floor level unless otherwise permitted by the approved plans and the fire code official, 7.5.4.1.
37. ____|____ | ____ Supplemental (extra) visual devices are permitted to be mounted less than 80 in. above the floor, 7.7.2.
38. ____|____ | ____ Ceiling-mounted devices are listed for use and spaced in accordance with Table 7.5.4.1.1(b) and the approved plans.

*Note: additional testing criteria is found in NFPA 72: Chapter 10.

Additional Comments:

Inspection Date: _____ Approved or Disapproved FD Inspector: _____

Inspection Date: _____ Approved or Disapproved FD Inspector: _____

Fire Alarm Installation Certification

Permit #: 2015-994486-LT Date: _____

	Property Protected	System Installer	System Supplier
Business Name:	Colorado Complete Health for Women		
Address:	1400 S Potomac St., Unit 2[illegible]		
	Aurora, CO 80012		
Representative:			
Telephone:			

Location of Plans: _____

Location of Owner's Manual: _____

1. Certification of System Installation: Complete this section after system is installed, but prior to conducting operational acceptance tests. Check wiring for opens, ground faults, and improper branching.

This system installation was inspected and found to comply with the installation requirements of:

_____ NFPA 72
_____ Article 760 of NEC
_____ Manufacturer's Instructions
_____ Other (specify; FM, UL, etc.) _____

Print Name: _____

Signed: _____ Date: _____

Organization: _____

2. Certification of System Operation: All operational features and functions of this system were tested and found to be operating properly in accordance with the requirements of:

_____ NFPA 72
_____ Design Specifications
_____ Manufacturer's Instructions
_____ Other (specify) _____

Print Name: _____

Signed: _____ Date: _____

Organization: _____

RSN: *1041526*
Permit #: *2015-994486-LT*

Fire Alarm Services, Inc.
4800 W. 60th Avenue
Arvada, CO 80003

Phone (303) 466-8800
Fax (303) 466-8820

Fire Alarm System Addition at:

Project: Colorado Complete Health for Women
1400 S. Potomac Street, Suite 215
Aurora, CO 80012

Scope of Work:

1. Relocate one (1) horn strobe.
2. Provide and install three (3) horn strobes.
3. Provide and install eight (8) strobes.

Steven Sprague
NICET Fire Alarm Systems
Level III
Certification #137416
Date: 8-5-15

RSN: 1041526
Permit #: 2015-994486-LT

GE
Security

EST Fire & Life Safety
Strobes, Horns, Bells & Chimes

Overview

The Genesis line of signals are among the smallest, most compact audible-visible emergency signaling devices in the world. About the size of a deck of playing cards, these devices are designed to blend with any decor.

Thanks to patented breakthrough technology, GE Security Genesis strobes do not require bulky specular reflectors and lenses. Instead, an exclusive cavity design conditions light to produce a highly controlled distribution pattern. Significant development efforts employing this new technology have given rise to a new benchmark in strobe performance – FullLight technology.

FullLight strobe technology produces a smooth light distribution pattern without the spikes and voids characteristic of specular reflectors. This ensures the entire coverage area receives consistent illumination from the strobe flash. As a result, Genesis strobes with FullLight technology go well beyond the minimum UL-required "T" pattern, significantly exceeding UL-1971 and ULC-S526 light distribution requirements.

Genesis strobes and horn-strobes offer 15 to 110 candela output, which is selectable with a conveniently-located switch on the side of the device. Models are also available that offer fixed 15/75 cd output. The candela output setting remains clearly visible even after final installation, yet it stays locked in place to prevent unauthorized tampering.

Genesis signals feature textured housings in architecturally neutral white or traditional fire red. An ingenious iconographic symbol indicates the purpose of the device. This universal symbol is code-compliant and is easily recognized by all building occupants regardless of what language they speak. Models with "FIRE" markings are also available.

Standard Features

- **Unique low-profile design**
  - The most compact UL-1971/ULC-S526 listed strobe available
  - Ultra-slim – protrudes less than one inch
  - Attractive appearance
  - No visible mounting screws
- **Four field-configurable options in one device**
  - Select 15, 30, 75, or 110 cd strobe output
  - Select high (default) or low dB horn output
  - Select temporal (default) or steady horn output
  - Select public mode flash rate (default) or private mode temporal flash
- **Fixed 15/75 cd model available**
- **Easy to install**
  - Fits standard 1-gang electrical boxes – no trim plate needed
  - Optional trim plate accommodates oversized openings
  - Pre-assembled with captive hardware
  - #12 AWG terminals – ideal for long runs or existing wiring
- **Unparalleled performance**
  - Industry's most even light distribution
  - Meets tough synchronizing standards for strobes
  - Single microprocessor controls both horn and strobe
  - Low current draw minimizes system overhead
  - Independent horn control over a single pair of wires
  - Highly regulated in-rush current
  - Multiple frequency tone improves sound penetration
  - Industry's first temporal strobe output

Field Configurable Horns and Strobes

Genesis Series

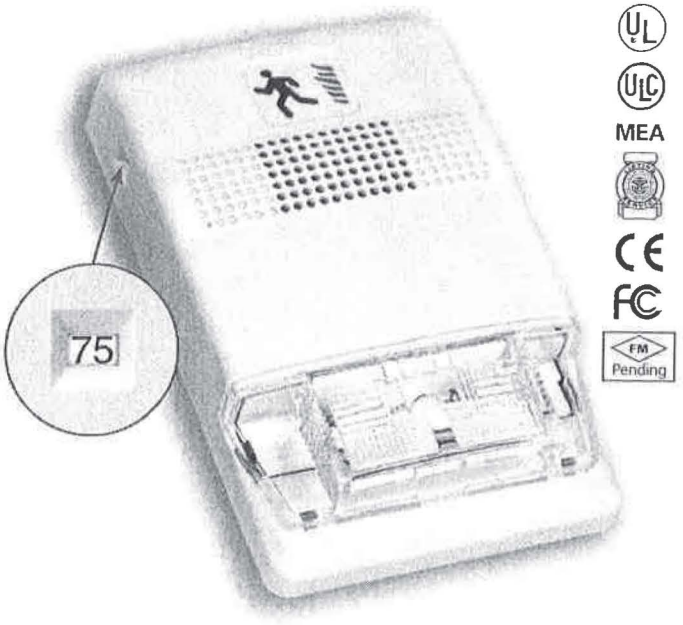

UL
ULC
MEA
CE
FC
FM Pending

RSN: *1041526*
Permit #: *2015-994486-LT*

Application

Genesis strobes are UL 1971-listed for use indoors as wall-mounted public-mode notification appliances for the hearing impaired. Prevailing codes require strobes to be used where ambient noise conditions exceed 105 dBA (87dBA in Canada), where occupants use hearing protection, and in areas of public accommodation as defined in the *Americans with Disabilities Act (see application notes – USA)*.

Combination horn-strobe signals must be installed in accordance with guidelines established for strobe devices.

Strobes

Genesis strobes are UL 1971-listed for use indoors as wall-mounted public-mode notification appliances for the hearing impaired. Prevailing codes require strobes to be used where ambient noise conditions exceed specified levels, where occupants use hearing protection, and in areas of public accommodation. Consult with your Authority Having Jurisdiction for details.

All Genesis strobes exceed UL synchronization requirements (within 10 milliseconds other over a two-hour period) when used with a synchronization source. Synchronization is important in order to avoid epileptic sensitivity.

NOTE: The flash intensity of some visible signals may not be adequate to alert or waken occupants in the protected area. Research indicates that the intensity of strobe needed to awaken 90% of sleeping persons is approximately 100 cd. GE Security recommends that strobes in sleeping rooms be rated at at least 110 cd.

WARNING: These devices will not operate without electrical power. As fires frequently cause power interruptions, further safeguards such as backup power supplies may be required.

Horns

Genesis horn output reaches as high as 99 dB and features a unique multiple frequency tone that results in excellent sound penetration and an unmistakable warning of danger. Horns may be configured for either coded or non-coded signal circuits. They can also be set for low dB output with a jumper cut that reduces horn output by about 5 dB. Horn-only models may be ceiling-mounted or wall-mounted.

The suggested sound pressure level for each signaling zone used with alert or alarm signals is at least 15 dB above the average ambient sound level, or 5 dB above the maximum sound level having a duration of at least 60 seconds, whichever is greater, measured 5 feet (1.5 m) above the floor. The average ambient sound level is, A-weighted sound pressure measured over a 24-hour period.

Doubling the distance from the signal to the ear will theoretically result in a 6 dB reduction of the received sound pressure level. The actual effect depends on the acoustic properties of materials in the space. A 3 dBA difference represents a barely noticeable change in volume.

Installation

Genesis horns and strobes mount to any standard one-gang surface or flush electrical box. Matching optional trim plates are used to cover oversized openings and can accommodate one-gang, two-gang, four-inch square, or octagonal boxes, and European 100 mm square.



Genesis Horn/Strobe with optional trim plate

All Genesis signals come pre-assembled with captive mounting screws for easy installation. Two tabs at the top of the signal unlock the cover to reveal the mounting hardware. The shallow depth of Genesis devices leaves ample room behind the signal for extra wiring. Once installed with the cover in place, no mounting screws are visible.

Field Configuration

Temporal horn and horn-strobe models are factory set to sound in a **three-pulse temporal pattern**. Units may be configured for use with coded systems by cutting a jumper on the circuit board. This results in a **steady output** that can be turned on and off (coded) as the system applies and removes power to the signal circuit. A Genesis Signal Master is required when horn-strobe models are configured for coded systems. Non-temporal, horn-only models sound a steady tone.

Genesis strobes and horn-strobes are shipped from the factory ready for use as **UL 1971 compliant** signals for public mode operation. These signals may be configured for **temporal flash** by cutting a jumper on the circuit board. This battery-saving feature is intended for private mode signaling only.

Genesis strobes and horn-strobes may be set for **15, 30, 75, or 110 candela output**. The output setting is changed by simply opening the device and sliding the switch to the desired setting. The device does not have to be removed to change the output setting. The setting remains visible through a small window on the side of the device after the cover is closed.

Horns and horn-strobes are factory set for **high dB output**. **Low dB output** may be selected by cutting a jumper on the circuit board. This reduces the output by about 5 dB.

Wiring

Field wiring terminals accommodate #18 to #12 AWG (0.75 mm² to 2.5 mm²) wiring. Horns, strobes, and combination horn-strobes are interconnected with a single pair of wires as shown below.

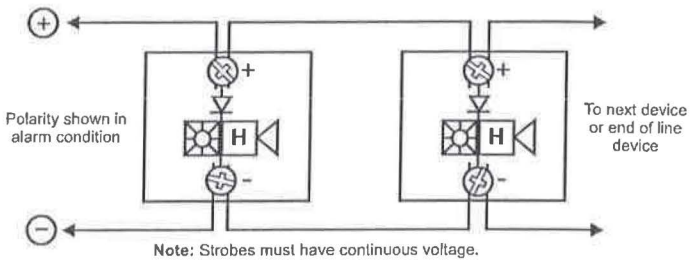

Note: Strobes must have continuous voltage.

RSN: *1041526*
Permit #: *2015-994486-LT*

Current Draw

Strobes, Horn-Strobes

Multi-cd Wall Strobes (G1-VM)

UL Rating	15 cd*	30 cd*	15/75 cd**	75 cd*	110 cd*
	RMS	RMS	RMS	RMS	RMS
16 Vdc	103	141	152	255	311
16 Vfwr	125	179	224	346	392

*G1-VM multi-cd; **G1F-V1575 fixed 15/75 cd

Typical Current	15 cd		30 cd		15/75		75 cd		110 cd	
	RMS	Mean	RMS	Mean	RMS	Mean	RMS	Mean	RMS	Mean
16 Vdc	85	79	127	124	150	140	245	243	285	283
20 Vdc	71	66	98	96	123	114	188	186	240	238
24 Vdc	59	55	82	80	104	97	152	150	191	190
33 Vdc	46	44	64	63	84	77	112	111	137	136
16 Vfwr	119	64	169	97	223	126	332	203	376	240
20 Vfwr	103	51	143	76	189	100	253	150	331	198
24 Vfwr	94	44	129	65	169	85	218	121	262	152
33 Vfwr	87	37	112	52	148	68	179	89	205	106

Wall Temporal Horn-strobes – High dB Setting

UL Rating	15 cd*	30 cd*	15/75 cd**	75 cd*	110 cd*
	RMS	RMS	RMS	RMS	RMS
16 Vdc	129	167	172	281	337
16 Vfwr	176	230	269	397	443

*G1-HDVM multi-cd
**G1F-HDV1575 fixed 15/75 cd

Typical Current	15 cd		30 cd		15/75		75 cd		110 cd	
	RMS	Mean	RMS	Mean	RMS	Mean	RMS	Mean	RMS	Mean
16 Vdc	102	89	135	129	160	152	246	242	309	305
20 Vdc	88	77	109	104	137	129	193	190	248	243
24 Vdc	81	71	94	90	122	114	161	158	203	200
33 Vdc	74	64	72	74	106	98	124	121	154	151
16 Vfwr	144	77	182	106	247	143	352	212	393	249
20 Vfwr	141	68	162	87	220	120	274	158	362	210
24 Vfwr	136	65	152	76	203	106	235	133	282	165
33 Vfwr	125	54	144	65	196	94	201	101	232	123

Wall Temporal Horn-strobes – Low dB Setting

UL Rating	15 cd*	30 cd*	15/75 cd**	75 cd*	110 cd*
	RMS	RMS	RMS	RMS	RMS
16 Vdc	122	160	146	274	330
16 Vfwr	162	216	231	383	429

*G1-HDVM multi-cd
**G1F-HDV1575 fixed 15/75 cd

Typical Current	15 cd		30 cd		15/75		75 cd		110 cd	
	RMS	Mean	RMS	Mean	RMS	Mean	RMS	Mean	RMS	Mean
16 Vdc	96	84	130	124	158	149	243	240	302	297
20 Vdc	79	70	104	99	133	124	189	186	241	237
24 Vdc	68	61	88	84	119	110	156	154	197	193
33 Vdc	56	52	71	68	100	93	118	116	146	143
16 Vfwr	128	69	180	104	241	139	344	204	389	244
20 Vfwr	118	60	157	84	213	115	266	156	343	200
24 Vfwr	113	54	144	74	195	101	230	128	279	161
33 Vfwr	112	48	137	64	182	87	197	99	226	117

Horns

Wall or Ceiling Mounted Temporal Horns (G1-HD)

UL Rating	High dB (RMS)	Low dB (RMS)
16 Vdc	26	19
24 Vdc	36	27
33 Vdc	41	33
16 Vfwr	51	37
24 Vfwr	69	52
33 Vfwr	76	70

Typical Current	High dB		Low dB	
	RMS	Mean	RMS	Mean
16 Vdc	22	17	17	14
20 Vdc	24	19	19	16
24 Vdc	27	21	22	18
33 Vdc	32	25	26	22
16 Vfwr	34	15	30	14
20 Vfwr	40	19	34	16
24 Vfwr	45	21	38	18
33 Vfwr	52	24	47	22

Wall or Ceiling Mounted Horns (G1-P)

UL Designation	Voltage Range	Max. Current, RMS
Regulated 24 Vdc	16 - 33 Vdc	13 mA
24 fwr	16 - 33 Vfwr	11 mA

Typical Current	RMS	Mean
24 Vdc	10	10
24 Vdc	11	11
31 Vdc	12	12
20 Vfwr	9	8
24 Vfwr	10	9

Notes and Comments

1. Current values are shown in mA.
2. UL Nameplate Rating can vary from Typical Current due to measurement methods and instruments used.
3. GE Security recommends using the Typical Current for system design including NAC and Power Supply loading and voltage drop calculations.
4. Use the Vdc RMS current ratings for filtered power supply and battery AH calculations. Use the Vfwr RMS current ratings for unfiltered power supply calculations.
5. Fuses, circuit breakers and other overcurrent protection devices are typically rated for current in RMS values. Most of these devices operate based upon the heating affect of the current flowing through the device. The RMS current (not the mean current) determines the heating affect and therefore, the trip and hold threshold for those devices.
6. Our industry has used 'mean' currents over the years. However, UL will direct the industry to use the 2004 RMS values in the future.

RSN: *1041526*
Permit #: *2015-994486-LT*

dBA output

Temporal Horns, Horn-strobes (G1-HD, G1-HDVM series)

High dB Setting	UL464		Average	Peak
	Temporal	Steady	Temporal/ Steady	Temporal/ Steady
16 Vdc	81.4	85.5	91.4	94.2
24 Vdc	84.4	88.6	94.5	97.6
33 Vdc	86.3	90.4	96.9	99.5

Low dB Setting	UL464		Average	Peak
	Temporal	Steady	Temporal/ Steady	Temporal/ Steady
16 Vdc	76.0	80.1	86.3	89.2
24 Vdc	79.4	83.5	89.8	92.5
33 Vdc	82.1	86.5	92.5	95.3

Steady Tone Horns (G1-P series)

	UL464	Average	Peak
16 Vdc	77 dBA, min	85 dBA	91 dBA
16 Vfwr	77 dBA, min	85 dBA	91 dBA

Notes

1. All values shown are dBA measured at 10 feet (3.01m).
2. UL464 values measured in reverberation room.
3. Average and Peak values are measured in anechoic chamber.

Average Sound Output (dBA)

(High dB setting, anechoic, 24V, measured at 10ft)

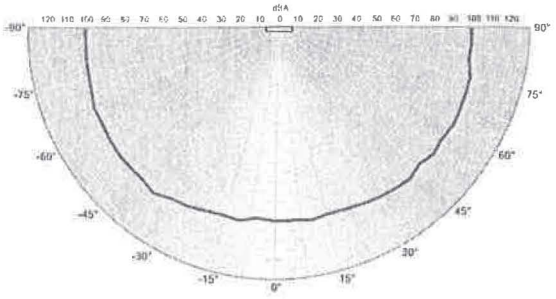

Light output - (effective cd)

Percent of UL rating versus angle

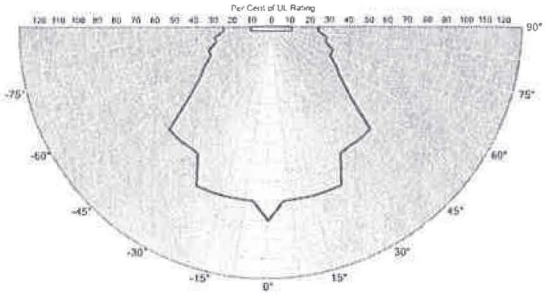

Specifications

Housing	Red or white textured UV stabilized, color impregnated engineered plastic. Exceeds 94V-0 UL flammability rating.
Lens	Optical grade polycarbonate (clear)
Mounting (indoor only)	Strobes and horn-strobes are for wall-mount installation only. Horn-only models may be ceiling- or wall-mounted. Flush mount: 2½ inch (64 mm) deep one-gang box Surface mount: Model 27193 surface mount box, wiremold box, or equivalent surface-mount box With optional trim plate: One-gang, two-gang, four-inch square, octagonal, or European single-gang box
Wire connections	Screw terminals: single input for both horn and strobe. #18 to #12 AWG (0.75 mm² to 2.5 mm²) wire size
Operating environment	Indoor only: 32-120°F (0-49°C) ambient temperature. 93% relative humidity
Agency listings/approvals	UL 1971, UL 1638, UL 464, ULC S525, ULC S526, CSFM, CE, FCC, MEA (FM pending). (All models comply with ADA Code of Federal Regulation Chapter 28 Part 36 Final Rule.)
Dimensions (HxWxD)	Signal: 4-1/2" x 2-3/4" x 13/16" (113 mm x 68 mm x 21 mm) Trimplate: 5" (127 mm); Height – 5-7/8" (149 mm); Depth – ½" (13 mm)
Operating voltage	G1-HD series temporal-tone horns: non-coded, filtered 16-33 Vdc or unfiltered 16-33 Vdc FWR (or coded when horn set to steady tone) G1-HDVM series temporal-tone horn-strobes: non-coded, filtered 16-33 Vdc or unfiltered 16-33 Vdc FWR (or coded (audible NAC only) when used with optional G1M Genesis Signal Master) G1-VM series strobes: non-coded, filtered 16 - 33 Vdc or unfiltered 16-33 Vdc FWR G1-P series steady-tone horns: coded or non-coded, filtered 20-31 Vdc or unfiltered 20-27 Vfwr
Strobe output rating	UL 1971, UL 1638, ULC S526: selectable 15 cd, 30 cd, 75 cd, or 110 cd output UL 1971: 15 cd (fixed 15/75 cd models) UL 1638, ULCS526: 75 cd (fixed 15/75 cd models)
Strobe flash rate	G1-VM strobes and G1-HDVM series temporal-tone horn-strobes: one flash per second synchronized with optional G1M Genesis Signal Master indefinitely within 10 milliseconds (or self-synchronized within 200 milliseconds over thirty minutes on a common circuit without G1M Genesis Signal Master) Temporal setting (private mode only): synchronized to temporal output of horns on same circuit
Synchronization Sources	G1M, G1M-RM, SIGA-CC1S, SIGA-MCC1S, BPS6A, BPS10A
Horn pulse rate	G1-HD temporal-tone horns and G1-HDVM series temporal-tone horn-strobes: temporal rate synchronized with optional G1M Genesis Signal Master indefinitely within 10 milliseconds (or self-synchronized within 200 milliseconds over thirty minutes on a common circuit without G1M Genesis Signal Master) G1-P steady-tone horns: continuous, steady tone only
Temporal audible pattern	½ sec ON, ½ sec OFF, ½ sec ON, ½ sec OFF, ½ sec ON, 1½ sec OFF, then repeat cycle

RSN: *1041526*
Permit #: *2015-994486-LT*

Ordering Information

Catalog Number		Description	Ship Wt. lbs (kg)
White Finish	Red Finish		
G1-HDVM	G1R-HDVM	Genesis Horn-Strobe (selectable 15, 30, 75, or 110 cd output, selectable high/low dB output)	0.25 (0.11)
G1-VM	G1R-VM	Genesis Strobe (selectable 15, 30, 75, or 110 cd output)	
G1-HD	G1R-HD	Genesis Temporal Horn (selectable high/low dB output)	
G1-P	G1R-P	Genesis Steady Horn (not compatible with Genesis Signal Master)	
G1F-HDVM	G1RF-HDVM	Genesis Horn-Strobe (selectable 15, 30, 75, or 110 cd output, selectable high/low dB output) – with "FIRE" marking	
G1F-VM	G1RF-VM	Genesis Strobe (selectable 15, 30, 75, or 110 cd output) – with "FIRE" marking	
G1F-HD	G1RF-HD	Genesis Temporal Horn (selectable high/low dB output) – with "FIRE" marking	
G1F-P	G1RF-P	Genesis Steady Horn with "FIRE" marking (not compatible with Genesis Signal Master)	
G1F-HDV1575	G1RF-HDV1575	15/75 cd temporal horn-strobe, hi/lo dB-24V – with "FIRE" marking (see note 1)	
G1F-V1575	G1RF-V1575	15/75 cd strobe – with "FIRE" marking (see note 1)	
Mounting Accessories			
G1T	G1RT	Genesis Trim Plate (for two-gang or 4" square boxes)	0.15 (0.7)
G1T-FIRE	G1RT-FIRE	Genesis Trim Plate (for two-gang or 4" square boxes) with "FIRE" markings	0.15 (0.7)
27193-16	27193-11	One-gang surface mount box	1 (0.4)
Synchronization Modules			
G1M		Genesis Signal Master – Snap-on Mount	0.2 (0.1)
G1M-RM		Genesis Signal Master – Remote Mount (1-gang)	
SIGA-CC1S		Intelligent Synchronization Output Module (2-gang)	0.5 (0.23)
SIGA-MCC1S		Intelligent Synchronization Output Module (Plug-in UIO)	0.18 (0.08)

Note 1: These 15/75 cd models provide fixed output and are not multi-candela devices. The 15 cd output component complies with UL1971, while the 75 cd output component complies with UL 1638.





Genesis Horn-Strobes may be ordered in red or white, with or without 'FIRE' marking. Order matching trim plates separately.

RSN: *1041526*
Permit #: *2015-994486-LT*

GE
Security

U.S.
T 888-378-2329
F 866-503-3996

Canada
T 519 376 2430
F 519 376 7258

Asia
T 852 2907 8108
F 852 2142 5063

Australia
T 61 3 9259 4700
F 61 3 9259 4799

Europe
T 32 2 725 11 20
F 32 2 721 86 13

Latin America
T 305 593 4301
F 305 593 4300

www.gesecurity.com/est

© 2007 General Electric Company
All Rights Reserved.

Genesis Series is a trademark of GE Security.

imagination at work

RSN: 1041526
Permit #: 2015-994486-LT

GE
Security

EST Fire & Life Safety
Strobes, Horns, Bells & Chimes

Overview

Genesis ceiling horn-strobes are small, compact, and attractive audible-visible emergency signaling devices. Protruding no more than 1.6" (41 mm) from the ceiling, Genesis horn-strobes blend with any decor.

Thanks to patented breakthrough technology, GE Security Genesis strobes do not require bulky specular reflectors and lenses. Instead, an exclusive cavity design conditions light to produce a highly controlled distribution pattern. Significant development efforts employing this new technology have given rise to a new benchmark in strobe performance – FullLight technology.

FullLight strobe technology produces a smooth light distribution pattern without the spikes and voids characteristic of specular reflectors. This ensures the entire coverage area receives consistent illumination from the strobe flash. As a result, Genesis strobes with FullLight technology go well beyond the minimum UL-required "cross" pattern.

Depending on the model, Genesis horn-strobes feature 15 to 95, or 95 to 177 candela output (see ordering information), which is selectable with a conveniently-located switch on the front of the device. The candela output setting is clearly visible even after final installation, yet it remains locked in place to prevent unauthorized movement after installation.

Genesis horn-strobes feature textured housings in architecturally neutral white or eye-catching fire alarm red. An ingenious iconographic symbol indicates the purpose of the device. This universal symbol is code-compliant and is easily recognized by all building occupants regardless of what language they speak. Models with "FIRE" markings are also available.

Standard Features

- **Field configurable – no need to remove the device!**
  - 15/30/75/95 cd and 95/115/150/177 cd models available
  - Switch settings remain visible even after the unit is installed
  - Low/high dB settings
- **Unique low-profile design**
  - 30 per cent slimmer profile than comparable signals
  - No visible mounting screws
  - Available with white or red housings
- **Easy to install**
  - Fits all standard 4" square electrical boxes with plenty of room behind the signal for extra wire – no extension ring or trim plate needed
  - Pre-assembled with captive hardware – no loose pieces
  - #18 to #12 AWG terminals – ideal for long runs or existing wiring
- **Unparalleled performance**
  - Exclusive FullLight strobe technology produces the industry's most even light distribution
  - Single high-efficiency microprocessor controls both horn and strobe
  - Low current draw minimizes system overhead
  - Independent horn control provided over a single pair of wires
  - Highly regulated in-rush current allows the maximum number of strobes on a circuit
  - 100 dB peak – multiple frequency tone improves wall penetration

Field Configurable Ceiling Horn-Strobes

Genesis Series

One or more patents pending.

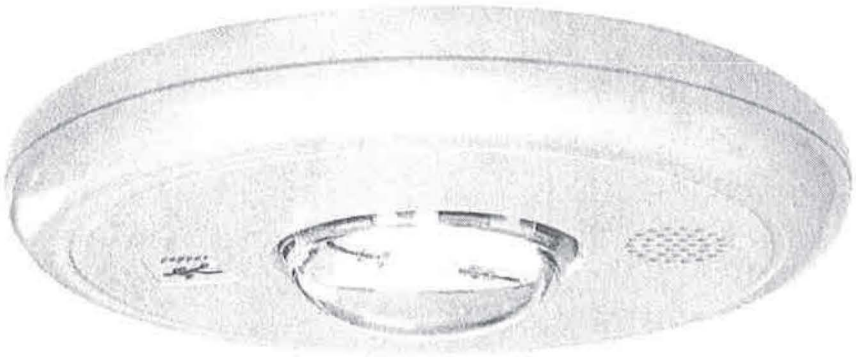

RSN: *1041526*
Permit #: *2015-994486-LT*

Application

Genesis strobes are UL 1971-listed for use indoors as ceiling-mounted public-mode notification appliances for the hearing impaired. Prevailing codes require strobes to be used where ambient noise conditions exceed 105 dBA (87dBA in Canada), where occupants use hearing protection, and in areas of public accommodation as defined in the *Americans with Disabilities Act (see application notes – USA).*

Combination horn-strobe signals must be installed in accordance with guidelines established for strobe devices.

Strobes

Genesis strobes are UL 1971-listed for use indoors as wall-mounted public-mode notification appliances for the hearing impaired. Prevailing codes require strobes to be used where ambient noise conditions exceed specified levels, where occupants use hearing protection, and in areas of public accommodation. Consult with your Authority Having Jurisdiction for details.

All Genesis strobes exceed UL synchronization requirements (within 10 milliseconds other over a two-hour period) when used with a synchronization source. Synchronization is important in order to avoid epileptic sensitivity.

NOTE: The flash intensity of some visible signals may not be adequate to alert or waken occupants in the protected area. Research indicates that the intensity of strobe needed to awaken 90% of sleeping persons is approximately 100 cd. GE Security recommends that strobes in sleeping rooms be rated at at least 110 cd.

WARNING: These devices will not operate without electrical power. As fires frequently cause power interruptions, further safeguards such as backup power supplies may be required.

Horns

Genesis horn output reaches as high as 99 dB (peak) and features a unique multiple frequency tone that results in excellent wall penetration and an unmistakable warning of danger. All models may be configured for either coded or non-coded signal circuits. They can also be set for low dB output with a jumper cut that reduces horn output by about 5 dB.

The suggested sound pressure level for each signaling zone used with alert or alarm signals is at least 15 dB above the average ambient sound level, or 5 dB above the maximum sound level having a duration of at least 60 seconds, whichever is greater, measured 5 feet (1.5 m) above the floor. The average ambient sound level is, A-weighted sound pressure measured over a 24-hour period.

Doubling the distance from the signal to the ear will theoretically result in a 6 dB reduction of the received sound pressure level. The actual effect depends on the acoustic properties of materials in the space. A 3 dBA difference represents a barely noticeable change in volume.

Dimensions

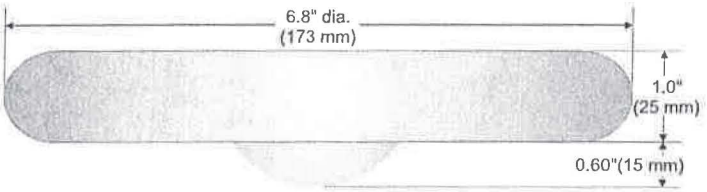

Installation and Mounting

All models are intended for indoor wall or ceiling applications only. Horn-strobes mount to any flush North-American 4" square electrical box.

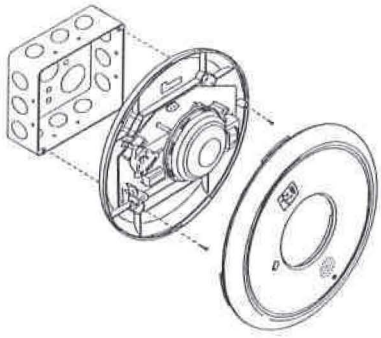

Genesis ceiling horn-strobes simply unlatch and twist to open. This gains access to mounting screws and the selectable candela switch. The shallow depth of Genesis devices leaves ample room behind the signal for extra wiring. Once installed with the cover in place, no mounting screws are visible.

GE Security recommends that these fire alarm horn-strobes always be installed in accordance with the latest recognized edition of national and local fire alarm codes.

Field Configuration

Depending on the model, Genesis horn-strobes may be set for 15 to 95, or 95 to 177 candela output (see ordering information). The output setting is changed by simply opening the device and sliding the switch to the desired setting. The horn-strobe does not have to be removed to change the output setting. The setting remains visible through a small window on the front of the device after the cover is closed.

The horn-strobe comes factory set for high dB output. Low dB output may be selected by cutting a jumper on the circuit board. This reduces the output by about 5 dB.

Wiring

Field wiring terminals accommodate #18 to #12 AWG (0.75 mm² to 2.5 mm²) wiring. Horn/strobes are interconnected with a single pair of wires as shown below.

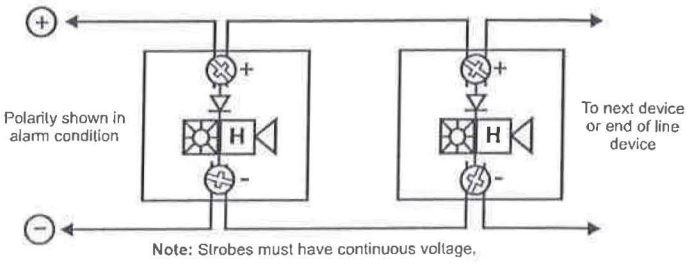

Note: Strobes must have continuous voltage.

RSN: *1041526*
Permit #: *2015-994486-LT*

Current Draw

GC-HDVM Temporal Horn-strobe: High dB Setting

UL Rating	15 cd RMS	30 cd RMS	75 cd RMS	95 cd RMS
16 Vdc	147	190	316	372
16 Vfwr	189	253	417	451

GC-HDVMH High cd Temporal Horn-strobe: High dB Setting

95 cd RMS	115 cd RMS	150 cd RMS	177 cd RMS
341	399	506	570
487	578	670	711

GC-HDVM Temporal Horn-strobe: High dB Setting

Typical Current	15 cd		30 cd		75 cd		95 cd	
	RMS	Mean	RMS	Mean	RMS	Mean	RMS	Mean
16 Vdc	111	95	152	143	281	276	333	328
20 Vdc	91	80	124	117	219	214	257	251
24 Vdc	80	71	108	101	185	180	212	207
33 Vdc	69	62	89	84	144	140	160	156
16 Vfwr	153	81	218	123	388	240	420	268
20 Vfwr	141	70	190	100	325	188	378	219
24 Vfwr	135	64	176	90	280	154	310	180
33 Vfwr	139	61	167	80	241	122	254	133

GC-HDVMH High cd Temporal Horn-strobe: High dB Setting

95 cd		115 cd		150 cd		177 cd	
RMS	Mean	RMS	Mean	RMS	Mean	RMS	Mean
324	322	377	374	477	474	554	551
258	256	299	296	369	366	417	414
220	217	252	249	304	301	341	338
172	169	188	185	223	220	244	241
463	265	535	312	665	400	718	442
392	211	439	240	517	287	587	334
346	179	382	212	458	246	498	271
296	142	323	152	358	178	387	194

GC-HDVM Temporal Horn-strobe: Low dB Setting

Typical Current	15 cd		30 cd		75 cd		95 cd	
	RMS	Mean	RMS	Mean	RMS	Mean	RMS	Mean
16 Vdc	108	91	149	139	275	269	327	322
20 Vdc	87	75	120	113	214	209	250	245
24 Vdc	76	66	103	97	180	175	205	201
33 Vdc	64	57	85	80	138	135	153	150
16 Vfwr	141	76	204	118	384	239	418	265
20 Vfwr	127	65	176	95	312	181	371	214
24 Vfwr	118	60	162	82	262	149	301	171
33 Vfwr	127	56	155	73	229	118	249	129

GC-HDVMH High cd Temporal Horn-strobe: Low dB Setting

95 cd		115 cd		150 cd		177 cd	
RMS	Mean	RMS	Mean	RMS	Mean	RMS	Mean
317	315	378	376	480	477	544	542
252	250	292	290	364	362	414	411
212	211	245	243	297	295	334	332
159	157	181	179	215	213	234	232
461	265	521	305	656	396	705	432
381	208	437	242	508	285	576	326
335	172	370	195	440	235	485	264
285	134	308	149	349	169	373	186

Notes and Comments

1. Current values are shown in mA.
2. UL Nameplate Rating can vary from Typical Current due to measurement methods and instruments used.
3. GE Security recommends using the Typical Current for system design including NAC and Power Supply loading and voltage drop calculations.
4. Use the Vdc RMS current ratings for filtered power supply and battery AH calculations, Use the Vfwr RMS current ratings for unfiltered power supply calculations.
5. Fuses, circuit breakers and other overcurrent protection devices are typically rated for current in RMS values. Most of these devices operate based upon the heating affect of the current flowing through the device. The RMS current (not the mean current) determines the heating affect and therefore, the trip and hold threshold for those devices.
6. Our industry has used 'mean' currents over the years. However, UL will direct the industry to use the 2004 RMS values in the future.

dBA output

High dB Setting	UL464		Average	Peak
	Temporal	Steady	Temporal/ Steady	Temporal/ Steady
16 Vdc	79.8	83.2	90.6	93.6
24 Vdc	83.3	85.4	93.6	96.6
33 Vdc	85	87.8	95.7	98.7

Low dB Setting	UL464		Average	Peak
	Temporal	Steady	Temporal/ Steady	Temporal/ Steady
16 Vdc	75	79.3	86.3	88.7
24 Vdc	78	83	88.8	92.4
33 Vdc	80.9	85.9	91.8	95.1

Notes
1. All values shown are dBA measured at 10 feet (3.01m); **2.** UL464 values measured in reverberation room; **3.** Average and Peak values are measured in anechoic chamber.

Light output - (effective cd)

Percent of UL rating versus angle

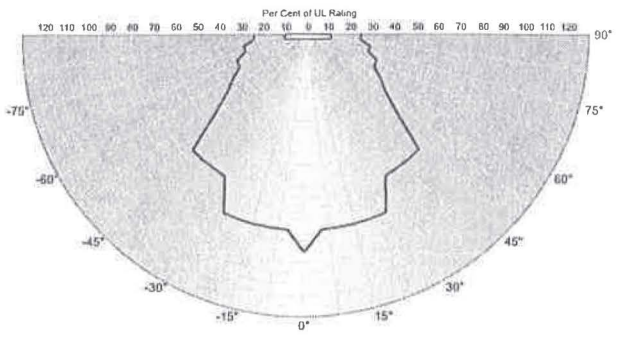

RSN: 1041526
Permit #: 2015-994486-LT

GE
Security

U.S.
T 888-378-2329
F 866-503-3996

Canada
T 519 376 2430
F 519 376 7258

Asia
T 852 2907 8108
F 852 2142 5063

Australia
T 61 3 9259 4700
F 61 3 9259 4799

Europe
T 32 2 725 11 20
F 32 2 721 86 13

Latin America
T 305 593 4301
F 305 593 4300

www.gesecurity.com/est

© 2007 General Electric Company
All Rights Reserved.

Genesis Series is a trademark of GE Security.

Specifications

Housing	Textured UV stabilized, color impregnated engineered plastic. Exceeds 94V-0 UL flammability rating. Red and white models available.
Lens	Optical grade polycarbonate (clear)
Mounting	North-American 4" square box, 2 1/8" (54 mm) deep (indoor wall or ceiling applications only).
Wire connections	Screw terminals: single input for both horn and strobe. #18 to #12 AWG (0.75 mm² to 2.5 mm²) wire size
Operating environment	Indoor: 32-120°F (0-49°C) ambient temperature. 93% relative humidity
Agency listings/approvals	Meets or exceeds ULC-S541, year 2004 UL requirements for standards UL1638 and UL1971, and complies with UL1480. All horn-strobes comply with ADA Code of Federal Regulation Chapter 28 Part 36 Final Rule. CSFM, MEA. FM pending.
Operating voltage	GC-HDVM series temporal-tone horn-strobes: non-coded, filtered 16-33 Vdc or unfiltered 16-33 Vdc FWR (or coded (audible NAC only) when used with optional G1M Genesis Signal Master)
Strobe output rating	UL 1971, UL 1638, ULC S526: selectable 15/30/75/95 cd (GC-HDVM) and 95/115/150/177 cd (GC-HDVMH)
Strobe flash rate	GC-HDVM series temporal-tone horn-strobes: one flash per second synchronized with optional G1M Genesis Signal Master indefinitely within 10 milliseconds (or self-synchronized within 200 milliseconds over thirty minutes on a common circuit without G1M Genesis Signal Master) Temporal setting (private mode only): synchronized to temporal output of horns on same circuit
Synchronization Sources	G1M-RM, SIGA-CC1S, SIGA-MCC1S, BPS6A, BPS10A
Horn pulse rate	GC-HDVM series temporal-tone horn-strobes: temporal rate synchronized with optional G1M Genesis Signal Master indefinitely within 10 milliseconds (or self-synchronized within 200 milliseconds over thirty minutes on a common circuit without G1M Genesis Signal Master)
Temporal audible pattern	½ sec ON, ½ sec OFF, ½ sec ON, ½ sec OFF, ½ sec ON, 1½ sec OFF, then repeat cycle

Ordering Information

Catalog Number	Housing Color	Marking	Description	Ship Wt. lbs (kg)
GC-HDVM	White	None	Genesis Ceiling/Wall Horn-Strobe with selectable 15, 30, 75, or 95 cd output	0.82 (1.8)
GCF-HDVM	White	"FIRE"		
GCFR-HDVM	Red	"FIRE"		
GC-HDVMH	White	None	Genesis Ceiling/Wall Horn-Strobe with selectable 95, 115, 150, or 177 cd output	
GCF-HDVMH	White	"FIRE"		

Accessories		
G1M-RM	Genesis Signal Master – Remote Mount (1-gang)	0.2 (0.1)
SIGA-CC1S	Intelligent Synchronization Output Module (2-gang)	0.5 (0.23)
SIGA-MCC1S	Intelligent Synchronization Output Module (Plug-in UIO)	0.18 (0.08)



White Field Configurable Ceiling Horn-Strobes may be ordered with or without optional 'FIRE' marking. Red Horn-Strobes come with 'FIRE" marking.

imagination at work