SCOPE OF WORK

SCOPE OF WORK IS TO ADD SEVEN (7) NEW UPRIGHT SPRINKLERS AND ONE (1) NEW SIDEWALL SPRINKLER TO THE EXISTING ELECTRICAL ROOMS. ROOMS WERE PREVIOUSLY ACCEPTED WITH NO SPRINKLER PROTECTION. DURING RECENT ELECTRICAL UPGRADES, IT WAS DETERMINED THAT THE WALLS AROUND EACH COMPARTMENT WERE NOT 2 HOUR RATED WALLS AND SPRINKLER PROTECTION IS REQUIRED. ALL ROOMS ARE EXPOSED TO STRUCTURE, HOWEVER, A SIGNIFICANT AMOUNT OF MECHANICAL EQUIPMENT FILLS THE CEILING SPACE, CREATING SMALL SPACES THAT ARE NOT ACCESSIBLE TO INSTALLERS. ROOM #1E-4902A IS OBSTRUCTED BY MECHANICAL EQUIPMENT. SPRINKLER PROTECTION REQUIRED ABOVE AND BELOW MECHANICAL EQUIPMENT. ROOM #1E-4902B -DECK IS OBSTRUCTED BY DUCT OVER 4FT WIDE AND OTHER MECHANICAL EQUIPMENT. SPRINKLER PROTECTION REQUIRED ABOVE AND BELOW MECHANICAL EQUIPMENT. ROOM #1E-4901A-DECK IS OBSTRUCTED BY MECHANICAL EQUIPMENT. DECK IS NOT ACCESSIBLE TO ADD SPRINKLER PROTECTION ABOVE EQUIPMENT.

GENERAL NOTES

1.) CONSTRICTION TYPE: I-A

2.) OCCUPANCY CLASSIFICATION: I-2

3.) SYSTEM IS A WET SYSTEM AND HAS BEEN DESIGNED TO MEET ALL NFPA 13, 2013 EDITION, IBC 2015 AND ALL APPLICABLE STATE AND LOCAL CODES.

4.) ALL ROOMS HAVE BEEN DESIGNED AS ORDINARY GROUP I OCCUPANCY WITH 130 SQFT SPACING.

5.) WALLS SEPARATING EACH COMPARTMENT ARE 1-HR RATED FIRE WALLS.

6.) ALL CEILINGS ARE EXPOSED TO STRUCTURE.

7.) ALL WALLS ARE FULL HEIGHT U.N.O.

8.) ALL BRANCH LINE PIPING TO BE SCHEDULE 10/SCHEDULE 40.

9.) ALL FITTINGS ARE TO BE DUCTILE IRON (THREADED AND GROOVED)

10.) ALL HANGERS TO BE IN ACCORDANCE WITH NFPA 13, 2013 EDITION.


11.) THIS SET OF FIRE PROTECTION SYSTEM SHOP DRAWINGS HAVE BEEN DESIGNED BY JOHNSON CONTROLS FIRE PROTECTION LP IN THEIR ENTIRETY AND SEALED BY A NICET LEVEL III CERTIFIED ENGINEER OR HIGHER AS REQUIRED BY THE CITY OF AURORA.

12.) ALL REQUIRED PENETRATIONS THROUGH FIRE RATED ASSEMBLIES SHALL BE SEALED WITH AN APPROVED MATERIAL TO MATCH THE RATING OF SUCH ASSEMBLIES. THIS IT TO BE BY OTHERS.


13.) ALL SPRINKLERS SHALL BE INSTALLED IN ACCORDANCE WITH APPLICABLE NFPA ENGINEERING STANDARDS, MANUFACTURER WRITTEN INSTRUCTIONS AND INSTALLED WITH DEFLECTOR PARALLEL TO THE ROOF AND/OR CEILING SYSTEM.

14.) A MINIMUM CLEAR SPACE OF 18" SHALL BE MAINTAINED BETWEEN BELOW THE SPRINKLER DEFLECTOR AND THE TOP OF ANY STORED MATERIALS.


15.) NO SPRINKLERS SHALL BE INSTALLED CLOSER THAN 4" TO ANY WALL.




HANGER DETAILS

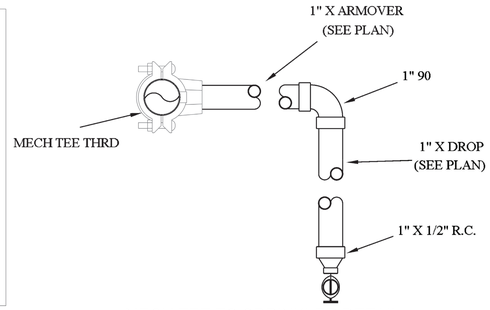

MECH TEE TO SPRINKLER DETAIL




TYCO TY-FRB TY-313 W/ HEAD GUARD




KEY PLAN
N.T.S

NO CHANGE TO EXISTING HYDRAULIC DESIGN AREA WAS MADE. SCOPE OF WORK IS OUTSIDE OF DESIGN AREA.



TYCO TY-FRB TY-3331

SPRINKLER DETAILS

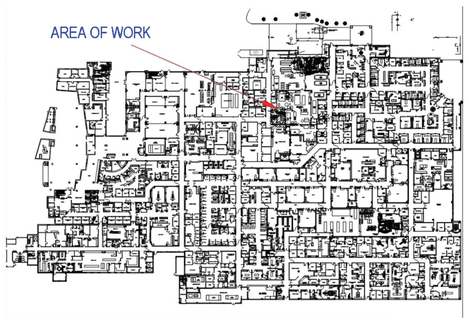


KEY PLAN
N.T.S

Items determined to be in violation of code during inspection are required to be corrected; this review does not grant approval of code violations.

Provide a full size set of legible approved construction documents PRINTED IN COLOR for review by the Field Inspector.

City of Aurora
Adopted Codes & Standards for this project:
2015-ICC - 2020-NEC
2013 NFPA 13 - 2013 NFPA 72
Amendments to Include Chapters 22 & 66

City of Aurora Building Division
Counter Permit intake by: JLG
Date: Dec 21, 2021
RSN: 1596341
Permit: 2021-2087958-CT
2015 INTERNATIONAL CODES & NEC Scope of permit to be field verified.

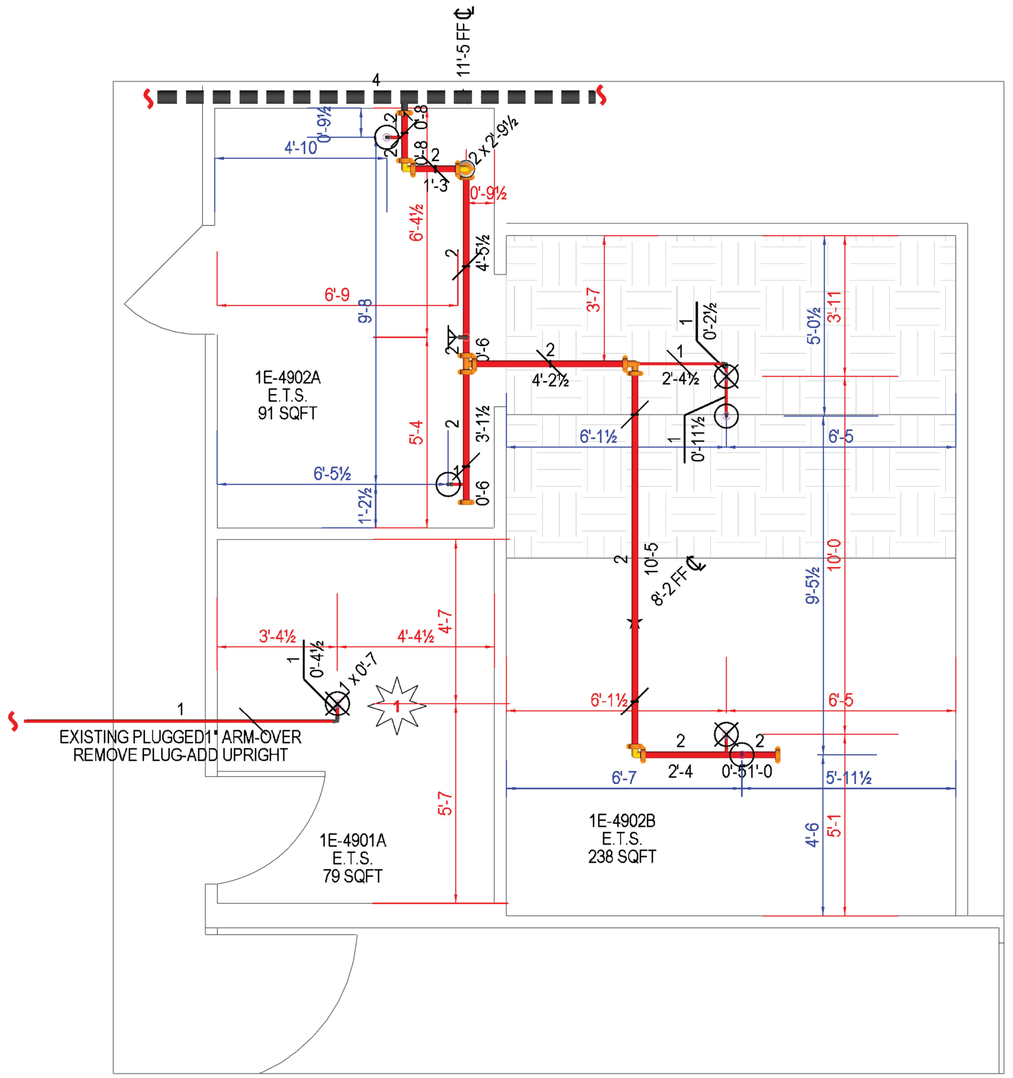

ELECTRICAL ROOM LAYOUT
SCALE: 1/2" = 1' IN FEET
0 1' 2' 4'

DUCT OVER 4' WIDE
3'-3 FLOOR PROTECTION DIMENSIONS
3'-3 DECK PROTECTION DIMENSIONS
EXISTING PIPE TO REMAIN
NEW SCH 10/SCH 40 PIPE
NO ACCESS TO DECK
NEW TYCO TY-FRB HORIZONTAL SIDEWALL SPRINKLER (UNDER DUCT PROTECTION) (1)
NEW TYCO TY-FRB UPRIGHT W/ HEAD GUARD (UNER DUCT PROTECTION) (3)
NEW TYCO TY-FRB UPRIGHT (DECK PROTECTION) (4)

TABLE 9.2.2.1 (a) (NFPA 13- 2013 ED.) MAXIMUM DISTANCE BETWEEN HANGERS (ft-in.)

	NOMINAL PIPE SIZE (in.)											
	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8
STEEL PIPE EXCEPT THREADED LIGHTWALL	N/A	12-0	12-0	15-0	15-0	15-0	15-0	15-0	15-0	15-0	15-0	15-0
THREADED LIGHTWALL STEEL PIPE	N/A	12-0	12-0	12-0	12-0	12-0	12-0	N/A	N/A	N/A	N/A	N/A
COPPER TUBE	8-0	8-0	10-0	10-0	12-0	12-0	12-0	15-0	15-0	15-0	15-0	15-0
CPVC	5-6	6-0	6-6	7-0	8-0	9-0	10-0	N/A	N/A	N/A	N/A	N/A
DUCTILE IRON PIPE	N/A	N/A	N/A	N/A	N/A	N/A	15-0	N/A	15-0	N/A	15-0	15-0

9.2.3.5.1 (NFPA 13, 2013 ED.): The cumulative horizontal length of an unsupported armover to a sprinkler, sprinkler drop, or sprig shall not exceed 24 in. for steel pipe or 12 in. for copper tube.

PROJECT NORTH

Graphic Scale 1/8"=1'-0"

IMPORTANT NOTE

** THIS DRAWING, THE INFORMATION, AND DESIGN APPLICATION CONTAINED HEREIN IS THE PROPERTY OF JOHNSON CONTROLS, AND IS LOANED UPON EXPRESS CONDITIONS THAT THE SAME BE RETURNED TO JOHNSON CONTROLS, UPON REQUEST. ALL INFORMATION CONTAINED HEREIN SHALL BE TREATED AS PROPERTY AND CONFIDENTIAL. NO REPRODUCTION OF THIS DRAWING SHALL BE MADE WITHOUT THE WRITTEN CONSENT OF NATIONAL FIRE PROTECTION.

** IN LOCALITIES SUBJECT TO FREEZING CONDITIONS, THE OWNER MUST MAINTAIN MINIMUM 40° HEAT THROUGHOUT WET PIPE SPRINKLER SYSTEMS AREAS, AND IN ENCLOSURES WHERE DRY PIPE, DELUGE OR OTHER VALVES CONTROLLING WATER SUPPLIES TO SPRINKLER SYSTEMS ARE LOCATED.

STANDARD SYMBOLS

- Check Valve
- Butterfly Valve
- O.S.&Y. Gate Valve
- Globe Valve
- Deluge Valve
- Ball Valve
- Condensate Drain
- Hose Valve
- -Brass FDC W/ Knox Caps
- Flow Switch
- Gauge

GENERAL NOTATIONS

- -Fire Rated Wall Assy.
- -Hydraulic Node Tag
- -Pipe Hanger
- 0'-0 FF ℄ - Off Finish Floor
- 0'-0 BB ℄ - Bottom Of Beam
- 0'-0 TB ℄ - Top Of Beam
- -Check Point Gauge
- -Floating Node
- -Dimension
- -Pipe Break

RME- STAMP & SIGNATURE

RICKY CONNER
DATE: 12/14/21
NICET III
CERTIFICATION # 145213

☐ AS-BUILT ☒ SUBMITTAL ☐ OTHER

SPRINKLERS/NOZZLES

SYM.	QTY.	MANUF.	MODEL/SIN	NPT	K	TEMP (F)	RESPONSE	FINISH	ESCUTCHEON	NOTES
○	4	TYCO	TY-FRB (TY3131)	1/2"	5.6K	200	QUICK	BRASS	NONE	
⊠	3	TYCO	TY-FRB (TY3131)	1/2"	5.6K	200	QUICK	BRASS	W/ HEAD GUARD	
◗	1	TYCO	TY-FRB (TY-3331)	1/2"	5.6K	200	QUICK	BRASS	NONE	

TOTAL THIS SHEET: 8

REVISIONS

#	Description	Date
11		
10		
9		
8		
7		
6		
5		
4		
3		
2		
1		
0	FIRE PROTECTION SUBMITTAL	12/9/2021

FIRE SPRINKLER CONTRACTOR

Johnson Controls
14200 E EXPOSITION AVE.
AURORA, CO 80012
Phone: (303) 355-0500
COLORADO REGISTERED CONTRACTOR
S-21-05403

CONTRACT NAME:
Medical Center of Aurora
1501 E. Potomac St.
Aurora, CO 80012

CONTRACT WITH: HCA HEALTH ONE
SCALE: 1/2" = 1'
CONTRACT NO: 419-650118777
DRAWN BY: L.FILIPPAZZO
DATE: 12/9/2021
DESCRIPTION: ELECTRICAL ROOM LAYOUT
CHECKED BY: R.CONNER
SHEET #: FP-1

Plot Date: 12/09/21 17:25:39PM

Johnson Controls

Medical Center of Aurora

1501 E. Potomac St.

Aurora, CO 80012

I have reviewed these plans and calculations and certify that they comply with the adopted NFPA standards.

NICET CERTIFIED

Ricky Conner
Certification #145213
LEVEL III

NICET Signature:

12-14-21

FIRE PROTECTION- WET SPRINKLER

PRODUCT DATA

tyco®

Worldwide Contacts | www.tyco-fire.com

Series TY-FRB — 5.6 K-factor Horizontal and Vertical Sidewall Sprinklers Quick Response, Standard Coverage

General Description

The Series TY-FRB, 5.6 K-factor, Horizontal and Vertical Sidewall Sprinklers described in this data sheet are quick response -standard coverage, decorative 3 mm glass bulb type spray sprinklers designed for use in light and ordinary hazard, commercial occupancies such as banks, hotels, shopping malls, etc. They are designed for installation along a wall or the side of a beam and just beneath a smooth ceiling. Sidewall sprinklers are commonly used instead of pendent or upright sprinklers due to aesthetics or building construction considerations, where piping across the ceiling is not desirable.

The recessed version of the Series TY-FRB Horizontal Sidewall Sprinkler is intended for use in areas with a finished wall. It uses a two-piece Style 10 Recessed Escutcheon with 1/2 in. (12,7 mm) of recessed adjustment or up to 3/4 in. (19,1 mm) of total adjustment from the flush sidewall position, or a two-piece Style 20 Recessed Escutcheon with 1/4 in. (6,4 mm) of recessed adjustment or up to 1/2 in. (12,7 mm) of total adjustment from the flush sidewall position. The adjustment provided by the Recessed Escutcheon reduces the accuracy to which the fixed pipe nipples to the sprinklers must be cut.

Corrosion resistant coatings, where applicable, are utilized to extend the life of copper alloy sprinklers beyond that which would otherwise be obtained when exposed to corrosive atmospheres. Although corrosion resistant coated sprinklers have passed the standard corrosion tests of the applicable approval agencies, the testing is not representative of all possible corrosive atmospheres. Consequently, it is recommended that the end user be consulted with respect to the suitability of these coatings for any given corrosive environment. The effects of ambient temperature, concentration of chemicals, and gas/chemical velocity, should be considered, as a minimum, along with the corrosive nature of the chemical to which the sprinklers will be exposed.

IMPORTANT

Refer to Technical Data Sheet TFP2300 for warnings pertaining to regulatory and health information.

Always refer to Technical Data Sheet TFP700 for the "INSTALLER WARNING" that provides cautions with respect to handling and installation of sprinkler systems and components. Improper handling and installation can permanently damage a sprinkler system or its components and cause the sprinkler to fail to operate in a fire situation or cause it to operate prematurely.


NOTICE

The Series TY-FRB Sprinklers described herein must be installed and maintained in compliance with this document, as well as with the applicable standards of the National Fire Protection Association, in addition to the standards of any other authorities having jurisdiction. Failure to do so may impair the performance of these devices.

The owner is responsible for maintaining their fire protection system and devices in proper operating condition. Contact the installing contractor or product manufacturer with any questions.

Sprinkler Identification Numbers

TY3331. . . . . Horizontal
TY3431. . . . . Vertical

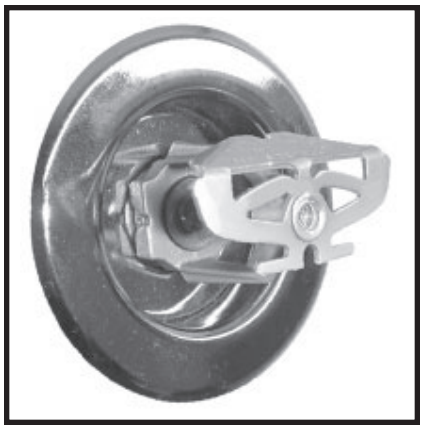



Technical Data

Approvals
UL and C-UL Listed
FM Approved
LPCB Approved
NYC Approved

(Refer to Table A for complete approval information including corrosion resistant status.)

Maximum Working Pressure
Refer to Table B

Discharge Coefficient
K=5.6 GPM/psi$^{1/2}$ (80,6 LPM/bar$^{1/2}$)

Temperature Ratings
Refer to Table A

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 4 of 58

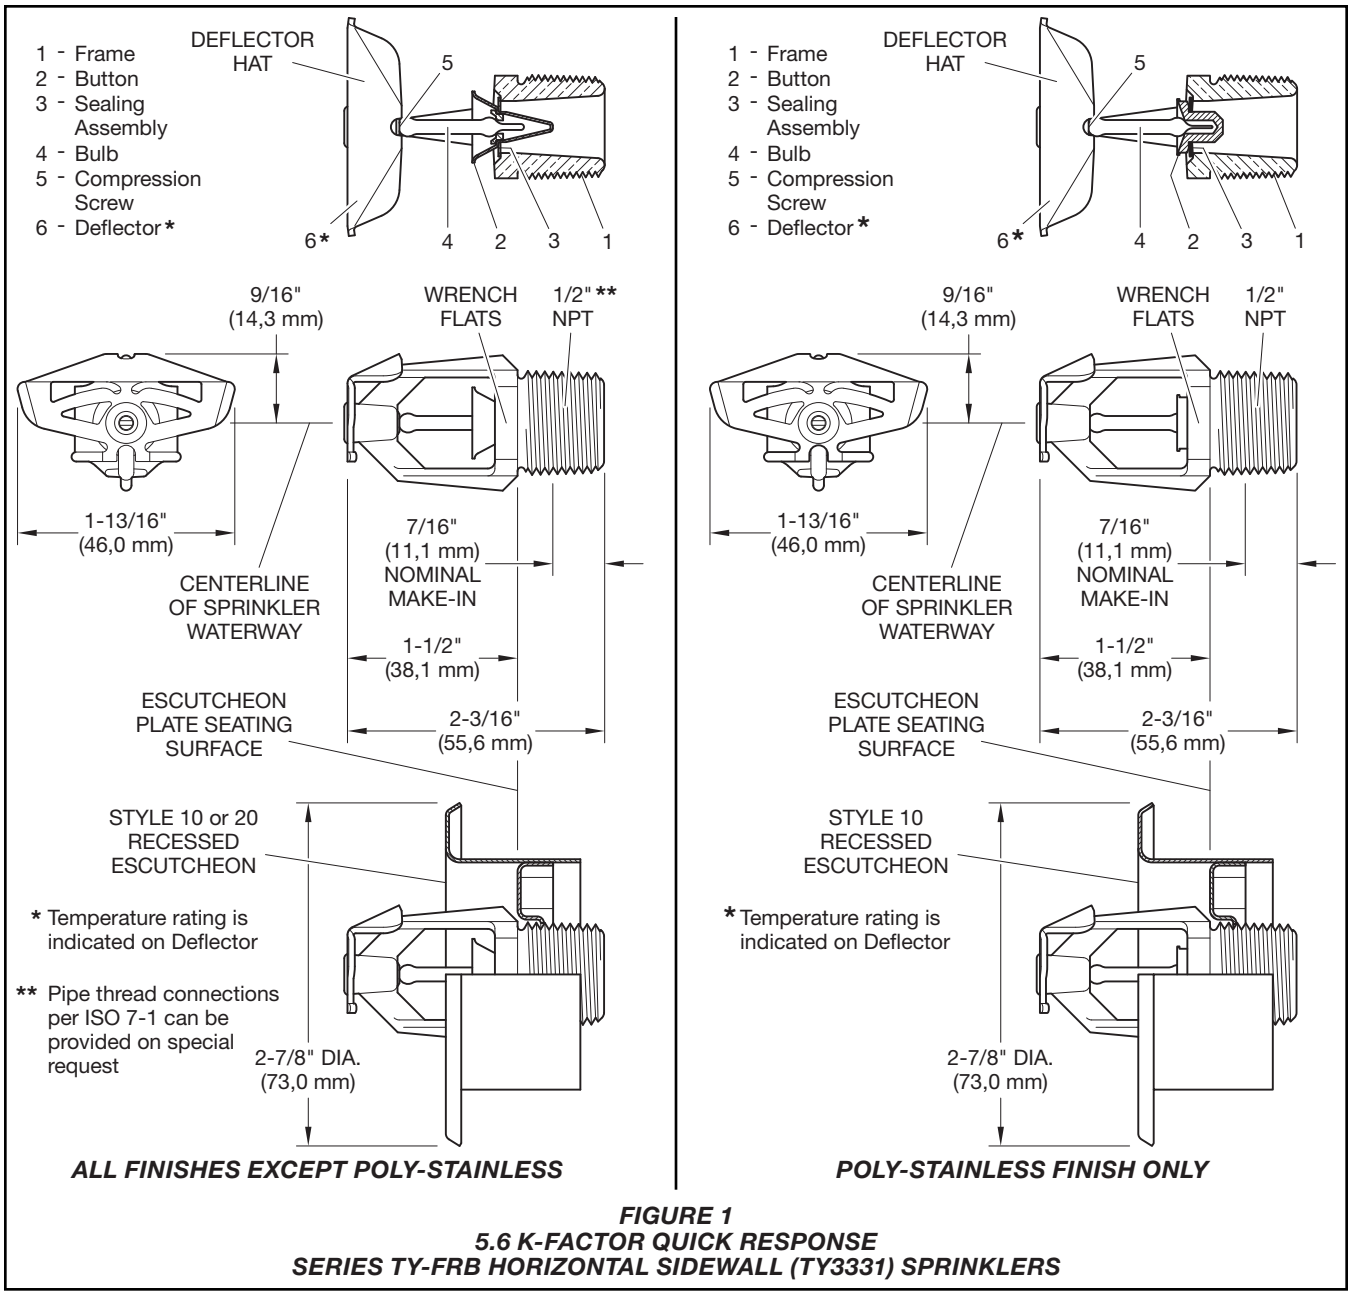


FIGURE 1
5.6 K-FACTOR QUICK RESPONSE
SERIES TY-FRB HORIZONTAL SIDEWALL (TY3331) SPRINKLERS

Finishes
Sprinkler: Refer to Table C

Recessed Escutcheon: Signal or Pure White, Jet Black, Grey Aluminum, Chrome Plated, or Brass Plated

Physical Characteristics

Frame	Bronze
Button	Brass/Copper
Sealing Assembly	Beryllium Nickel w/TEFLON
Bulb	Glass
Compression Screw	Bronze
HSW Deflector	Bronze
VSW Deflector	Copper

Poly-Stainless Physical Characteristics

Frame	Bronze
Button	L316 Stainless Steel*
Bulb	Glass
Compression Screw	L316 Stainless Steel*
HSW Deflector	Copper/Bronze
Sealing Assembly	Gold Plated Beryllium Nickel w/TEFLON

*Type L316 stainless steel (UNS 31603) per ASTM A479/479M or BS EN 1008 WN1.4404.

Operation

The glass bulb contains a fluid which expands when exposed to heat. When the rated temperature is reached, the fluid expands sufficiently to shatter the glass bulb, allowing the sprinkler to activate and water to flow.

Design Criteria

The Series TY-FRB, 5.6 K-factor, Horizontal and Vertical Sidewall Sprinklers are intended for fire protection systems designed in accordance with the standard installation rules recognized by the applicable Listing or Approval agency (e.g., UL Listing is based on the requirements of NFPA 13, and FM Approval is based on the requirements of FM's Loss Prevention Data Sheets). Only the Style 10 or 20 Recessed Escutcheon, as applicable, is to be used for recessed horizontal installations.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 5 of 58

Installation

The Series TY-FRB, 5.6 K-factor, Horizontal and Vertical Sidewall Sprinklers must be installed in accordance with this section.

General Instructions
Do not install any bulb type sprinkler if the bulb is cracked or there is a loss of liquid from the bulb. With the sprinkler held horizontally, a small air bubble should be present. The diameter of the air bubble is approximately 1/16 in. (1,6 mm) for the 135°F (57°C) to 3/32 in. (2,4 mm) for the 286°F (141°C) temperature ratings.

A leak tight 1/2 in. NPT sprinkler joint should be obtained with a torque of 7 to 14 lb-ft (9,5 to 19,0 N·m). Higher levels of torque may distort the sprinkler and cause leakage or impairment of the sprinkler.

Do not attempt to make-up for insufficient adjustment in the escutcheon plate by under-or over-tightening the sprinkler. Readjust the position of the sprinkler fitting to suit.

Series TY-FRB Horizontal and Vertical Sidewall Sprinkler Installation
The Series TY-FRB Horizontal and Vertical Sidewall Sprinklers must be installed in accordance with the following instructions.

Step 1. Horizontal sidewall sprinklers are to be installed in the horizontal position with their centerline of waterway perpendicular to the back wall and parallel to the ceiling. The word “TOP” on the Deflector is to face towards the ceiling.

Vertical sidewall sprinklers are to be installed in the pendent or upright position with the arrow on the Deflector pointing away from the wall.

Step 2. With pipe thread sealant applied to the pipe threads, hand tighten the sprinkler into the sprinkler fitting.

Step 3. Tighten the sprinkler into the sprinkler fitting using only the W-Type 6 Sprinkler Wrench (Ref. Figure 5), With reference to Figure 1 or 2, the W-Type 6 Sprinkler Wrench is to be applied to the wrench flats.

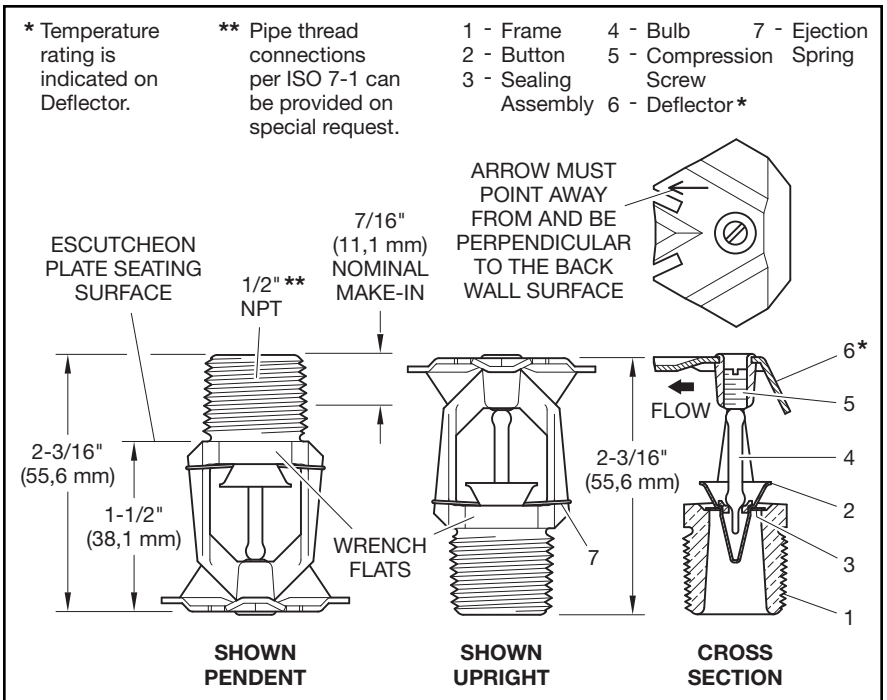


FIGURE 2
5.6 K-FACTOR QUICK RESPONSE
SERIES TY-FRB VERTICAL SIDEWALL (TY3431) SPRINKLERS

Series TY-FRB Recessed Horizontal Sidewall Sprinkler Installation
The Series TY-FRB Recessed Horizontal Sidewall Sprinklers must be installed in accordance with this section.

Step A. Recessed horizontal sidewall sprinklers are to be installed in the horizontal position with their centerline of waterway perpendicular to the back wall and parallel to the ceiling. The word “TOP” on the Deflector is to face towards the ceiling.

Step B. After installing the Style 10 or 20 Mounting Plate over the sprinkler threads, hand tighten the sprinkler into the sprinkler fitting.

Step C. Tighten the sprinkler into the sprinkler fitting using only the W-Type 7 Recessed Sprinkler Wrench (Ref. Figure 6). With reference to Figure 1, the W-Type 7 Recessed Sprinkler Wrench is to be applied to the sprinkler wrench flats.

Step D. After the ceiling has been installed or the finish coat has been applied, slide on the Style 10 or 20 Closure over the Series TY-FRB Sprinkler and push the Closure over the Mounting Plate until its flange comes in contact with the ceiling.

Care and Maintenance

The Series TY-FRB, 5.6 K-factor, Horizontal and Vertical Sidewall Sprinklers must be maintained and serviced in accordance with this section.

Before closing a fire protection system main control valve for maintenance work on the fire protection system that it controls, permission to shut down the affected fire protection system must be obtained from the proper authorities and all personnel who may be affected by this action must be notified.

Absence of an escutcheon, which is used to cover a clearance hole, may delay the time to sprinkler operation in a fire situation.

Sprinklers that are found to be leaking or exhibiting visible signs of corrosion must be replaced.

Automatic sprinklers must never be painted, plated, coated or otherwise altered after leaving the factory. Modified sprinklers must be replaced. Sprinklers that have been exposed to corrosive products of combustion, but have not operated, should be replaced if they cannot be completely cleaned by wiping the sprinkler with a cloth or by brushing it with a soft bristle brush.

Care must be exercised to avoid damage to the sprinklers before, during, and after installation. Spriklers

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 6 of 58

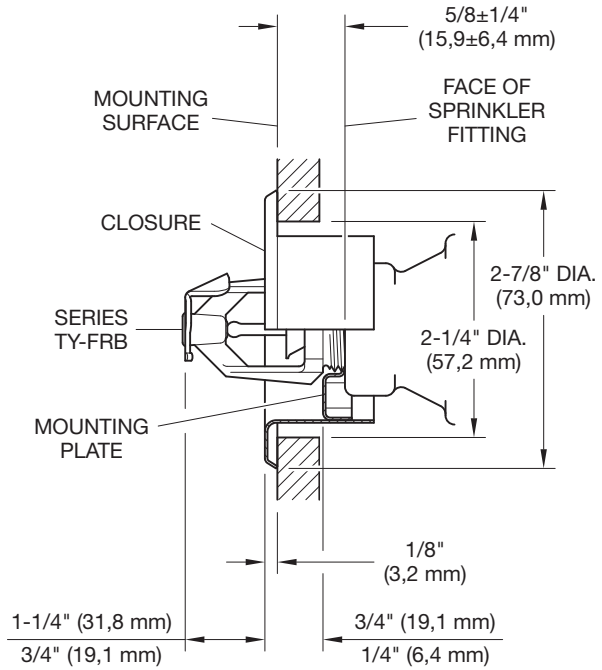


FIGURE 3
SERIES TY-FRB RECESSED HORIZONTAL SIDEWALL SPRINKLER WITH TWO-PIECE 3/4 INCH TOTAL ADJUSTMENT STYLE 10 RECESSED ESCUTCHEON

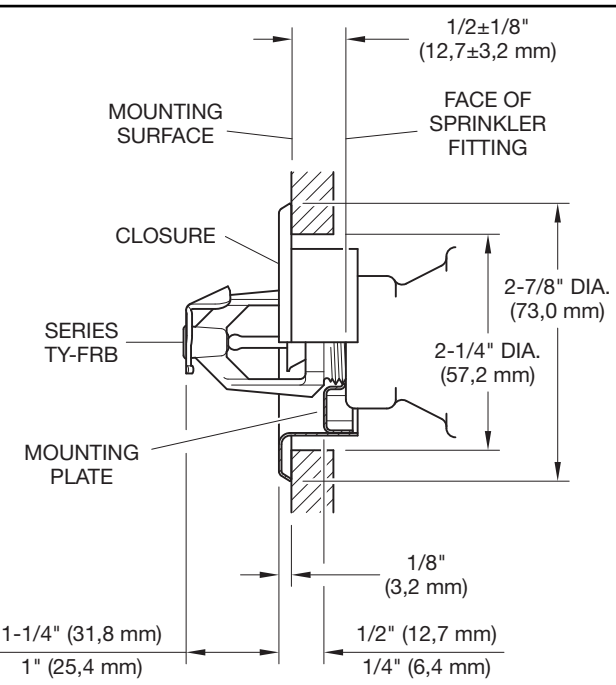


FIGURE 4
SERIES TY-FRB RECESSED HORIZONTAL SIDEWALL SPRINKLER WITH TWO-PIECE 1/2 INCH TOTAL ADJUSTMENT STYLE 20 RECESSED ESCUTCHEON




FIGURE 5
W-TYPE 6
SPRINKLER WRENCH




FIGURE 6
W-TYPE 7 RECESSED
SPRINKLER WRENCH

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 7 of 58

				SPRINKLER FINISH (See Note 11)				
K	**TYPE**	**TEMP.**	**BULB LIQUID**	**NATURAL BRASS**	**CHROME PLATED**	**POLYESTER[c]**	**POLY-STAINLESS[c]**	**LEAD COATED**
5.6 1/2 in. NPT	**HORIZ. SIDEWALL (TY3331)**	135°F (57°C)	Orange	1, 2, 3, 4, 9, 10		1, 2, 3, 9	1, 2	1, 2, 3, 9
		155°F (68°C)	Red					
		175°F (79°C)	Yellow					
		200°F (93°C)	Green					
		286°F (141°C)	Blue					
	RECESSED HORIZ. SIDEWALL (TY3331)[a] Figure 3	135°F (57°C)	Orange	1, 2, 4, 9, 10		1, 2, 9	1, 2	N/A
		155°F (68°C)	Red					
		175°F (79°C)	Yellow					
		200°F (93°C)	Green					
	RECESSED HORIZ. SIDEWALL (TY3331)[b] Figure 4	135°F (57°C)	Orange	1, 2, 3, 4, 9			N/A	N/A
		155°F (68°C)	Red					
		175°F (79°C)	Yellow					
		200°F (93°C)	Green					
5.6 1/2 in. NPT	**VERTICAL SIDEWALL (TY3431) Installed Pendent or Upright**	135°F (57°C)	Orange	5, 6, 7, 8, 9			N/A	5, 6, 7, 9
		155°F (68°C)	Red					
		175°F (79°C)	Yellow					
		200°F (93°C)	Green					
		286°F (141°C)	Blue					

NOTES:
1. Listed by Underwriters Laboratories, Inc. (UL) as Quick Response Sprinklers for use in Light and Ordinary Hazard Occupancies at a 4 to 12 in. (100 to 300 mm) top of deflector to ceiling distance.
2. Listed by Underwriters Laboratories Inc. for use in Canada (C-UL) as Quick Response Sprinklers for use in Light and Ordinary Hazard Occupancies at a 4 to 12 in. (100 to 300 mm) top of deflector to ceiling distance.
3. Approved by Factory Mutual Research Corporation (FM) as Quick Response Sprinklers for use in Light Hazard Occupancies at a 4 to 12 in. (100 to 300 mm) top of deflector to ceiling distance.
4. Approved by the Loss Prevention Certification Board (LPCB Ref. No. 007a/04) at a 4 to 6 in. (100 to 150 mm) top of deflector to ceiling distance. The LPC does not rate the thermal sensitivity of horizontal sidewall sprinklers.
5. Listed by Underwriters Laboratories, Inc. as Quick Response Sprinklers for use in Light and Ordinary Hazard Occupancies.
6. Listed by Underwriters Laboratories for use in Canada (C-UL) as Quick Response Sprinklers for use in Light and Ordinary Hazard Occupancies.
7. Approved by Factory Mutual Research Corporation (FM) as Quick Response Sprinklers for use in Light Hazard Occupancies.
8. Approved by the Loss Prevention Certification Board (LPCB Ref. No. 094a/06 & 007a/04) as Quick Response Sprinklers.
9. Approved by the City of New York under MEA 354-01-E.
10. Approved by the Loss Prevention Certification Board (LPCB Ref. No. 094a/06) at a 4 to 6 in. (100 to 150 mm) top of deflector to ceiling distance. The LPC does not rate the thermal sensitivity of horizontal sidewall sprinklers.
11. Where Polyester Coated and Lead Coated Sprinklers are noted to be UL and C-UL Listed, the sprinklers are UL and C-UL Listed as Corrosion Resistant Sprinklers. Where Lead Coated Sprinklers are noted to be FM Approved, the sprinklers are FM Approved as Corrosion Resistant Sprinklers.

a. Installed with Style 10 (1/2 in. NPT) 3/4 in.Total Adjustment Recessed Escutcheon.
b. Installed with Style 20 (1/2 in. NPT) 1/2 in. Total Adjustment Recessed Escutcheon.
c. Frame and deflector only.

TABLE A
LABORATORY LISTINGS AND APPROVALS

damaged by dropping, striking, wrench twist/slippage, or the like, must be replaced. Also, replace any sprikler that has a cracked bulb or that has lost liquid from its bulb. (Ref. Installation Section).

The owner must assure that the sprinklers are not used for hanging any objects and that the sprinklers are only cleaned by means of gently dusting with a feather duster; otherwise, non-operation in the event of a fire or inadvertent operation may result.

Frequent visual inspections are recommended to be initially performed for corrosion resistant coated sprinklers, after the installation has been completed, to verify the integrity of the corrosion resistant coating. Thereafter, annual inspections per NFPA 25 should suffice; however, instead of inspecting from the floor level, a random sampling of close-up visual inspections should be made, so as to better determine the exact sprinkler condition and the long term integrity of the corrosion resistant coating, as it may be affected by the corrosive conditions present.

The owner is responsible for the inspection, testing, and maintenance of their fire protection system and devices in compliance with this document, as well as with the applicable standards of the National Fire Protection Association (e.g., NFPA 25), in addition to the standards of any other authorities having jurisdiction. Contact the installing contractor or product manufacturer with any questions.

It is recommended that automatic sprinkler systems be inspected, tested, and maintained by a qualified Inspection Service in accordance with local requirements and/or national codes.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 8 of 58

		SPRINKLER FINISH			
K	**TYPE**	**NATURAL BRASS**	**CHROME PLATED**	**POLYESTER**	**LEAD COATED**
5.6 1/2 in. NPT	**HORIZONTAL SIDEWALL (TY3331)**	250 PSI (17,2 BAR) or 175PSI (12,1 BAR) (SEE NOTE 1)			
	RECESSED HORIZ. SIDEWALL (TY3331)				
	VERTICAL SIDEWALL (TY3431)	175 PSI (12,1 BAR)			

NOTES:
1. The maximum working pressure of 250 psi (17,2 bar) only applies to the Listing by Underwriters Laboratories, Inc. (UL); the Listing by Underwriters Laboratories, Inc. for use in Canada (C-UL); and, the Approval by the City of New York.

TABLE B
MAXIMUM WORKING PRESSURE

P/N 57 – XXX – X – XXX

		SIN
378	HORIZONTAL SIDEWALL	TY3331
375	VERTICAL SIDEWALL	TY3431

	SPRINKLER FINISH
1	NATURAL BRASS
2	POLY-STAINLESS GREY ALUMINUM (RAL9007)[1] POLYESTER
3	PURE WHITE (RAL9010)[2] POLYESTER
4	SIGNAL WHITE (RAL9003) POLYESTER
5	JET BLACK (RAL9005)[3] POLYESTER
7	LEAD COATED
9	CHROME PLATED

	TEMPERATURE RATINGS
135	135°F (57°C)
155	155°F (68°C)
175	175°F (79°C)
200	200°F (93°C)
286	286°F (141°C)

NOTES:
1. Available for TY3331 only.
2. Eastern Hemisphere sales only.
3. Available in 155°F (68°C) or 200°F (93°C temperature rating only.

TABLE C
PART NUMBER SELECTION
SERIES TY-FRB HORIZONTAL AND VERTICAL SIDEWALL SPRINKLERS

Limited Warranty

For warranty terms and conditions, visit www.tyco-fire.com

Ordering Procedure

Contact your local distributor for availability. When placing an order, indicate the full product name and Part Number (P/N).

Sprinkler Assemblies with NPT Thread Connections:
Specify: Series TY-FRB (specify SIN), (specify K-factor), (specify) Horizontal Sidewall or Vertical Sidewall Sprinkler, Standard Response, Standard Coverage, (specify) temperature rating, (specify) finish or coating, P/N (specify from Table C)

Recessed Escutcheon
Specify: Style (10 or 20) Recessed Escutcheon with (specify*) finish, P/N (specify*)

* Refer to Technical Data Sheet TFP770

Sprinkler Wrench
Specify: W-Type 6 Sprinkler Wrench, P/N 56-000-6-387

Specify: W-Type 7 Sprinkler Wrench, P/N 56-850-4-001

1400 Pennbrook Parkway, Lansdale, PA 19446 | Telephone +1-215-362-0700

© 2018 Johnson Controls. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.

NATIONAL FIRE PROTECTION ASSOCIATION and NFPA are registered trademarks of National Fire Protection Association;
TEFLON is a registered trademark of DuPont

Johnson Controls

tyco®

Worldwide Contacts | www.tyco-fire.com

Series TY-FRB – 2.8, 4.2, 5.6, and 8.0 K-Factor Upright, Pendent, and Recessed Pendent Sprinklers Quick Response, Standard Coverage

General Description

The TYCO Series TY-FRB 2.8, 4.2, 5.6, and 8.0 K-factor Upright, Pendent, and Recessed Pendent Sprinklers described in herein are quick response, standard coverage, decorative 3 mm glass bulb-type spray sprinklers. They are designed for use in light or ordinary hazard, commercial occupancies such as banks, hotels, and shopping malls.

The TY-FRB Recessed Pendent Sprinkler, where applicable, is intended for use in areas with a finished ceiling. This recessed pendent sprinkler uses one of the following Recessed Escutcheons:

- A two-piece Style 10 (1/2 in. NPT) or Style 40 (3/4 in. NPT) Recessed Escutcheon with 1/2 in. (12,7 mm) of recessed adjustment or up to 3/4 in. (19,1 mm) of total adjustment from the flush pendent position.
- A two-piece Style 20 (1/2 in. NPT) or Style 30 (3/4 in. NPT) Recessed Escutcheon with 1/4 in. (6,4 mm) of recessed adjustment or up to 1/2 in. (12,7 mm) of total adjustment from the flush pendent position.

The adjustment provided by the Recessed Escutcheon reduces the accuracy to which the fixed pipe drops to the sprinklers must be cut.

Corrosion-resistant coatings, where applicable, are utilized to extend the life of copper alloy sprinklers beyond what would be obtained when exposed to corrosive atmospheres. Although corrosion-resistant coated sprinklers have passed the standard corrosion tests of the applicable approval agencies, the testing is not representative of all possible corrosive atmospheres. Consequently, it is recommended that the end user be consulted with respect to the suitability of these coatings for any given corrosive environment. The effects of ambient temperature, concentration of chemicals, and gas/chemical velocity, should be considered, as a minimum, along with the corrosive nature of the chemical to which the sprinklers will be exposed.

An intermediate level version of the Series TY-FRB Pendent Sprinklers is detailed in Technical Data Sheet TFP356. Sprinkler Guards are detailed in Technical Data Sheet TFP780.

IMPORTANT

Refer to Technical Data Sheet TFP2300 for warnings pertaining to regulatory and health information.


Always refer to Technical Data Sheet TFP700 for the "INSTALLER WARNING" that provides cautions with respect to handling and installation of sprinkler systems and components. Improper handling and installation can permanently damage a sprinkler system or its components and cause the sprinkler to fail to operate in a fire situation or cause it to operate prematurely.

NOTICE

The Series TY-FRB 2.8, 4.2, 5.6, and 8.0 K-factor Upright, Pendent, and Recessed Pendent Sprinklers described herein must be installed and maintained in compliance with this document and with the applicable standards of the National Fire Protection Association (NFPA), in addition to the standards of any authorities having jurisdiction. Failure to do so may impair the performance of these devices.

The owner is responsible for maintaining their fire protection system and devices in proper operating condition. The installing contractor or sprinkler manufacturer should be contacted with any questions.

NFPA 13 prohibits installation of 1/2 in. NPT sprinklers with K-factors greater than 5.6 in new construction. They are intended for retrofit in existing sprinkler systems only.

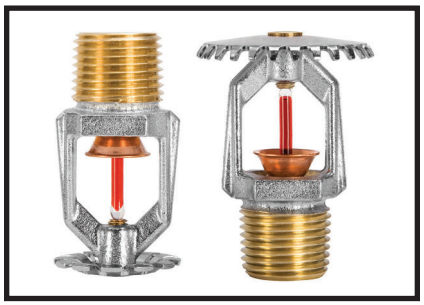



Sprinkler Identification Number (SIN)

TY1131 . . . Upright 2.8K, 1/2 in. NPT
TY1231 . . Pendent 2.8K, 1/2 in. NPT
TY2131 . . . Upright 4.2K, 1/2 in. NPT
TY2231 . . Pendent 4.2K, 1/2 in. NPT
TY3131 . . . Upright 5.6K, 1/2 in. NPT
TY3231 . . Pendent 5.6K, 1/2 in. NPT
TY4131 . . . Upright 8.0K, 3/4 in. NPT
TY4231 . . Pendent 8.0K, 3/4 in. NPT
TY4831 . . . Upright 8.0K, 1/2 in. NPT
TY4931 . . Pendent 8.0K, 1/2 in. NPT

Technical Data

Approvals
UL and C-UL Listed
FM, LPCB, and NYC Approved

See Tables A, B, C and D for complete approval information including corrosion-resistant status.

Maximum Working Pressure
See Table E

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 10 of 58

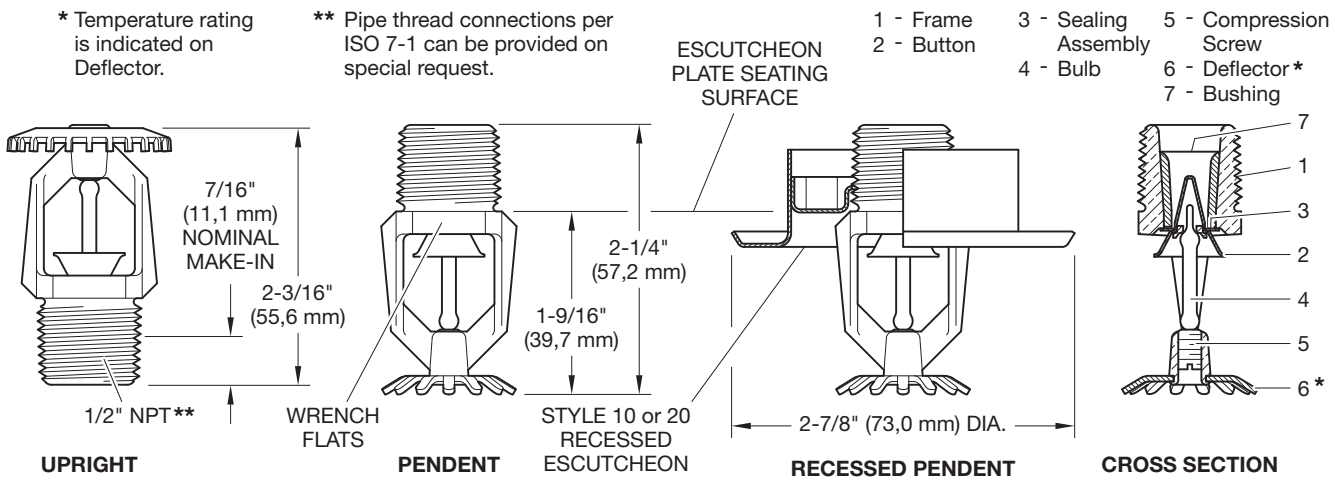


FIGURE 1
QUICK RESPONSE SERIES TY-FRB UPRIGHT (TY1131) AND PENDENT (TY1231) SPRINKLERS
2.8 K-FACTOR, 1/2 IN. NPT

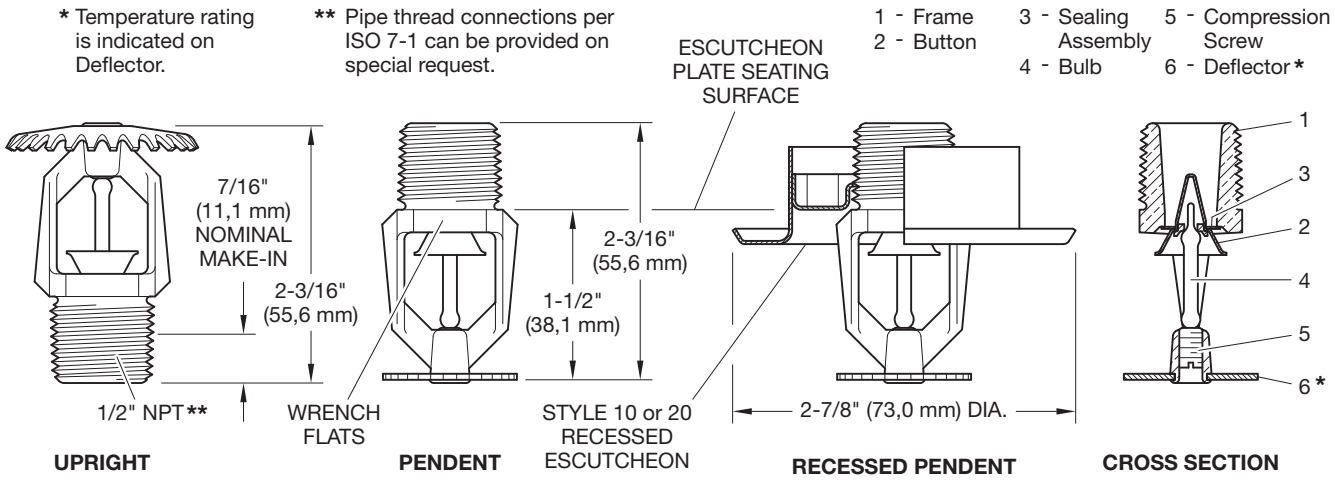


FIGURE 2
QUICK RESPONSE SERIES TY-FRB UPRIGHT (TY2131) AND PENDENT (TY2231) SPRINKLERS
4.2 K-FACTOR, 1/2 IN. NPT

Discharge Coefficient
K=2.8 GPM/psi½ (40,3 LPM/bar½)
K=4.2 GPM/psi½ (60,5 LPM/bar½)
K=5.6 GPM/psi½ (80,6 LPM/bar½)
K=8.0 GPM/psi½ (115,2 LPM/bar½)

Temperature Rating
See Tables A and B

Finishes
Sprinkler: See Table D

Recessed Escutcheon: Signal or Pure White, Grey Aluminum, Jet Black, Chrome Plated, or Natural Brass

Physical Characteristics
Frame . . . . . Bronze
Button . . . . . Brass/Copper
Sealing Assembly . . Beryllium Nickel w/TEFLON
Bulb . . . . . Glass
Compression Screw . . . . . Bronze
Deflector . . . . . Copper/Bronze
Bushing (K=2.8) . . . . . Bronze

Poly-Stainless Physical Characteristics
Frame . . . . . Bronze
Button . . . . . L316 Stainless Steel*
Bulb . . . . . Glass
Compression Screw . . . . . L316 Stainless Steel*
Deflector . . . . . Copper/Bronze
Sealing Assembly . Gold Plated Beryllium Nickel w/TEFLON

*Type L316 stainless steel (UNS 31603) per ASTM A479/479M or BS EN 1008 WN1.4404.

Operation

The glass bulb contains a fluid that expands when exposed to heat. When the rated temperature is reached, the fluid expands sufficiently to shatter the glass bulb, allowing the sprinkler to activate and water to flow.

Design Criteria

The TYCO Series TY-FRB 2.8, 4.2, 5.6, and 8.0 K-factor Upright, Pendent, and Recessed Pendent Sprinklers are intended for fire protection systems designed in accordance with the standard installation rules recognized by the applicable Listing or Approval agency, such as UL Listing based on the requirements of NFPA 13 and FM Approval based on the requirements of the FM Global Loss Prevention Data Sheets. Use only the style 10, 20, 30, or 40 Recessed Escutcheon, as applicable, for recessed pendent installations.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 11 of 58

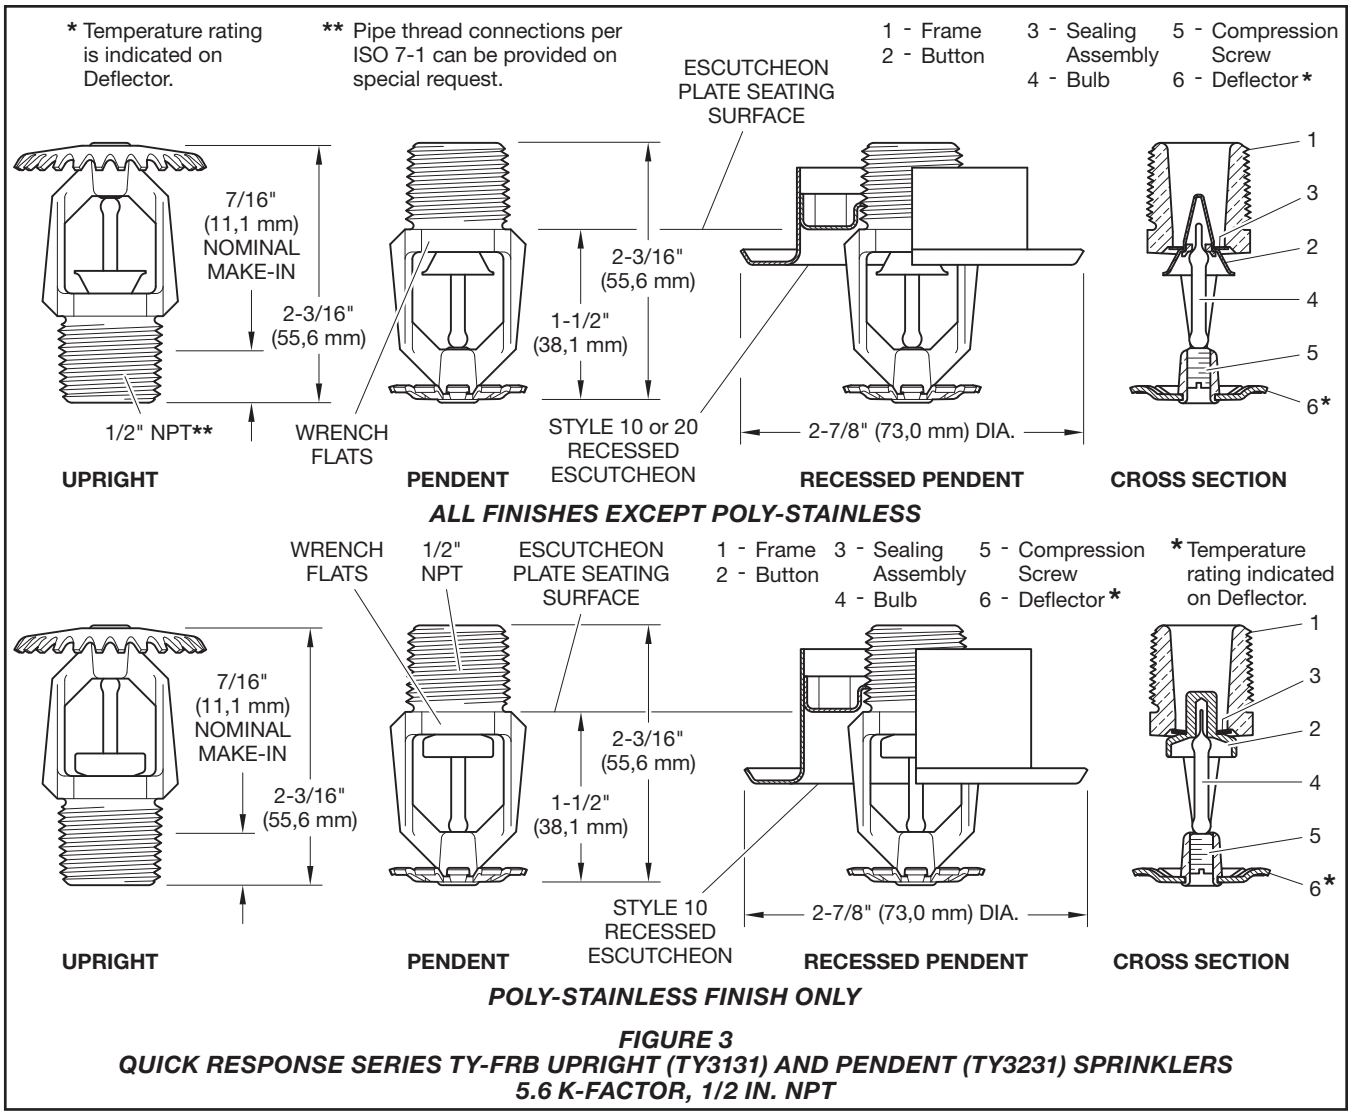


FIGURE 3
QUICK RESPONSE SERIES TY-FRB UPRIGHT (TY3131) AND PENDENT (TY3231) SPRINKLERS
5.6 K-FACTOR, 1/2 IN. NPT

Installation

The TYCO Series TY-FRB 2.8, 4.2, 5.6, and 8.0 K-factor Upright, Pendent, and Recessed Pendent Sprinklers must be installed in accordance with this section.

General Instructions
Do not install any bulb type sprinkler if the bulb is cracked or there is a loss of liquid from the bulb. With the sprinkler held horizontally, a small air bubble should be present. The diameter of the air bubble is approximately 1/16 in. (1,6 mm) for the 135°F (57°C) and 3/32 in. (2,4 mm) for the 286°F (141°C) temperature ratings. A leak-tight 1/2 in. NPT sprinkler joint should be obtained by applying a minimum-to-maximum torque of 7 to 14 lb-ft (9,5 to 19,0 N·m). A leak tight 3/4 in. NPT sprinkler joint should be obtained with a torque of 10 to 20 lb-ft (13,4 to 26,8 N·m). Higher levels of torque can distort the sprinkler inlet and cause leakage or impairment of the sprinkler. Do not attempt to compensate for insufficient adjustment in the escutcheon plate by under- or over-tightening the sprinkler. Re-adjust the position of the sprinkler fitting to suit.

Series TY-FRB Upright and Pendent Sprinklers
The Series TY-FRB Upright and Pendent Sprinklers must be installed in accordance with the following instructions:

Step 1. Install pendent sprinklers in the pendent position. Install upright sprinklers in the upright position.

Step 2. With pipe thread sealant applied to the pipe threads, hand-tighten the sprinkler into the sprinkler fitting.

Step 3. Tighten the sprinkler into the sprinkler fitting using only the W-Type 6 Sprinkler Wrench (Ref. Figure 14). With reference to Figure 1 to Figure 5, apply the W-Type 6 Sprinkler Wrench to the sprinkler wrench flats.

Series TY-FRB Recessed Pendent Sprinklers
The Series TY-FRB Recessed Pendent Sprinklers must be installed in accordance with the following instructions:

Step 1. After installing the Style 10, 20, 30, or 40 Mounting Plate, as applicable, over the sprinkler threads and with pipe-thread sealant applied to the pipe threads, hand-tighten the sprinkler into the sprinkler fitting.

Step 2. Tighten the sprinkler into the sprinkler fitting using only the W-Type 7 Recessed Sprinkler Wrench, see Figure 15. With reference to Figure 1 to 4, apply the W-Type 7 Recessed Sprinkler Wrench to the sprinkler wrench flats.

Step 3. After the ceiling is installed or the finish coat is applied, slide on the Style 10, 20, 30, or 40 Closure over the Series TY-FRB Recessed Pendent Sprinkler and push the Closure over the Mounting Plate until its flange comes in contact with the ceiling.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 12 of 58

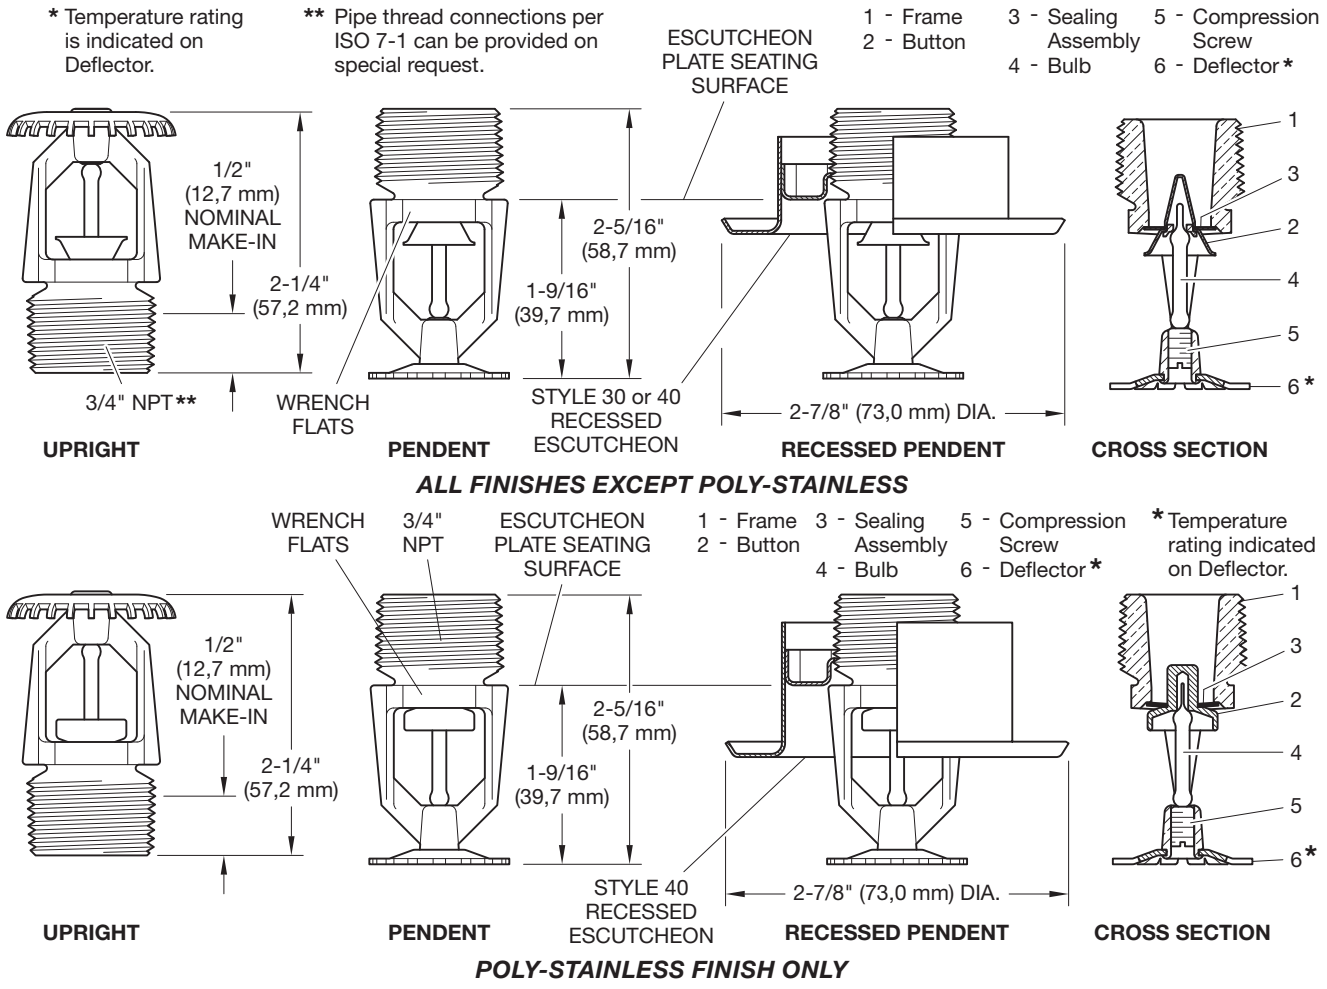


FIGURE 4
QUICK RESPONSE SERIES TY-FRB UPRIGHT (TY4131) AND PENDENT (TY4231) SPRINKLERS
8.0 K-FACTOR, 3/4 IN. NPT

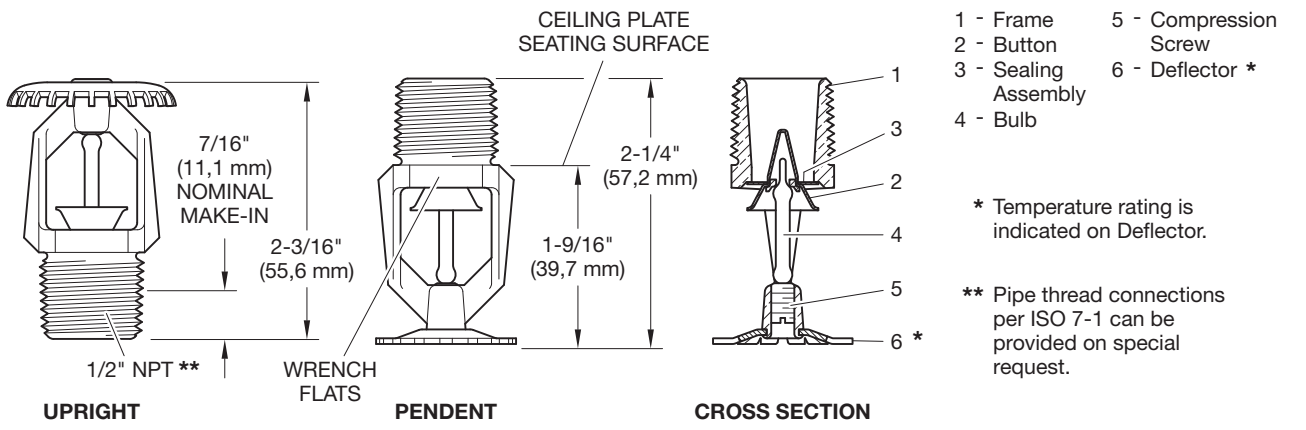


FIGURE 5
QUICK RESPONSE SERIES TY-FRB UPRIGHT (TY4831) AND PENDENT (TY4931) SPRINKLERS
8.0 K-FACTOR, 1/2 IN. NPT

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 13 of 58

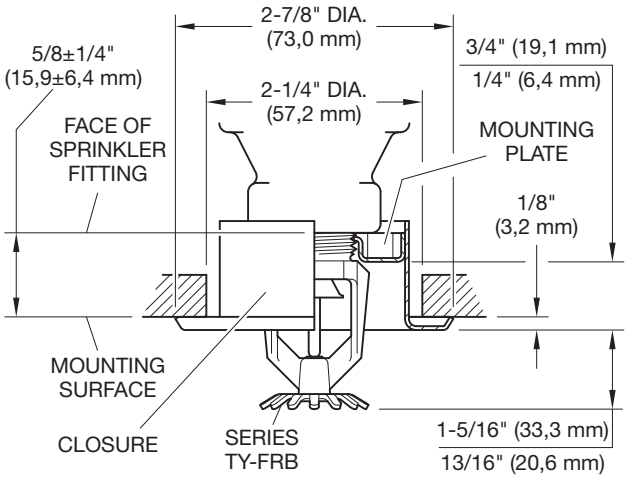


FIGURE 6
SERIES TY-FRB RECESSED PENDENT
WITH TWO-PIECE 3/4 INCH TOTAL ADJUSTMENT
STYLE 10 RECESSED ESCUTCHEON
2.8 K-FACTOR, 1/2 IN. NPT

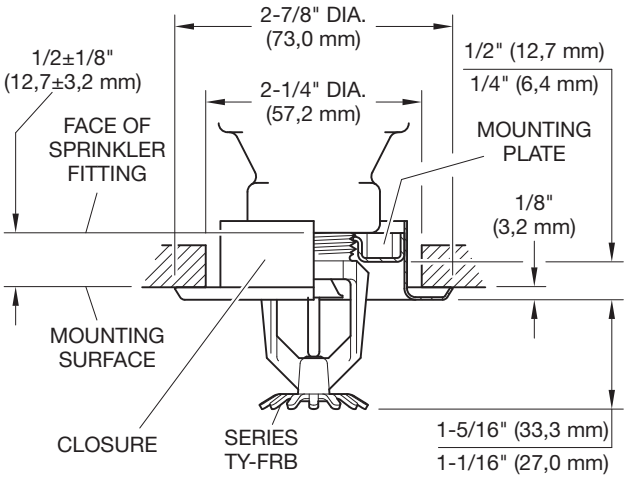


FIGURE 7
SERIES TY-FRB RECESSED PENDENT
WITH TWO-PIECE 1/2 INCH TOTAL ADJUSTMENT
STYLE 20 RECESSED ESCUTCHEON
2.8 K-FACTOR, 1/2 IN. NPT

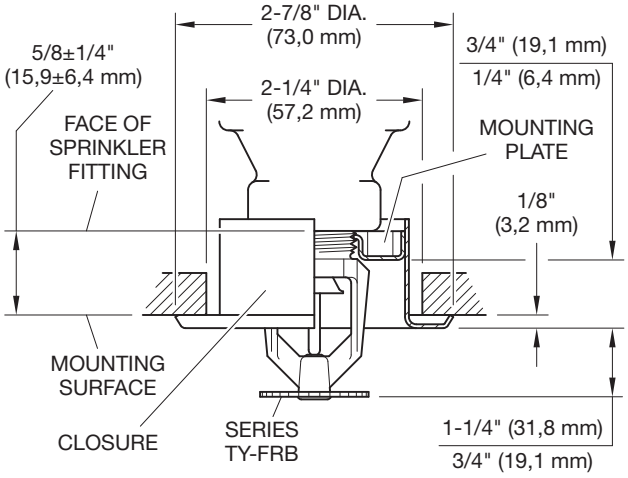


FIGURE 8
SERIES TY-FRB RECESSED PENDENT
WITH TWO-PIECE 3/4 INCH TOTAL ADJUSTMENT
STYLE 10 RECESSED ESCUTCHEON
4.2 K-FACTOR, 1/2 IN. NPT

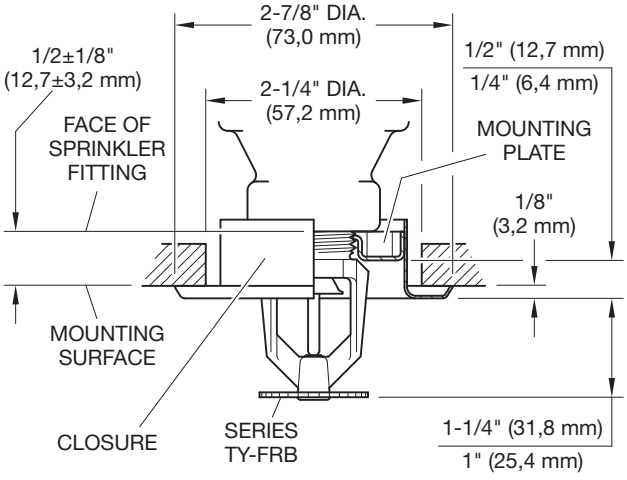


FIGURE 9
SERIES TY-FRB RECESSED PENDENT
WITH TWO-PIECE 1/2 INCH TOTAL ADJUSTMENT
STYLE 20 RECESSED ESCUTCHEON
4.2 K-FACTOR, 1/2 IN. NPT

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 14 of 58

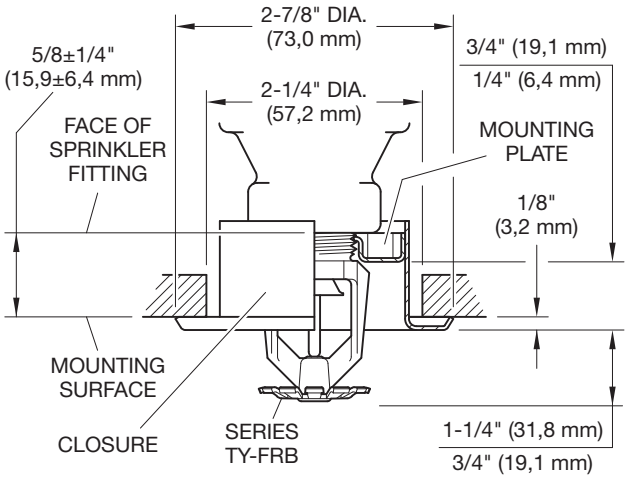


FIGURE 10
SERIES TY-FRB RECESSED PENDENT
WITH TWO-PIECE 3/4 INCH TOTAL ADJUSTMENT
STYLE 10 RECESSED ESCUTCHEON
5.6 K-FACTOR, 1/2 IN. NPT

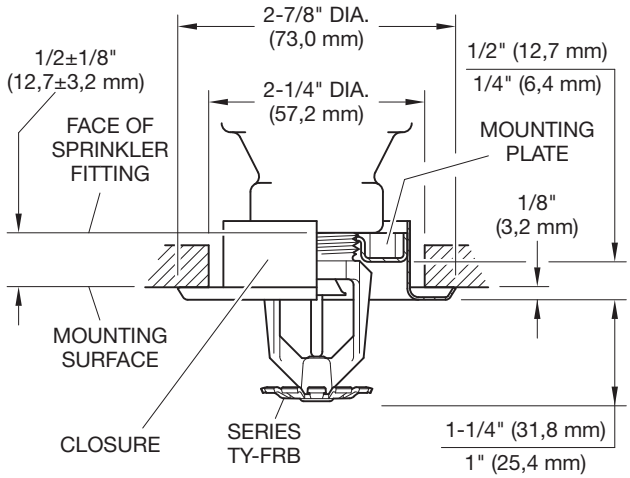


FIGURE 11
SERIES TY-FRB RECESSED PENDENT
WITH TWO-PIECE 1/2 INCH TOTAL ADJUSTMENT
STYLE 20 RECESSED ESCUTCHEON
5.6 K-FACTOR, 1/2 IN. NPT

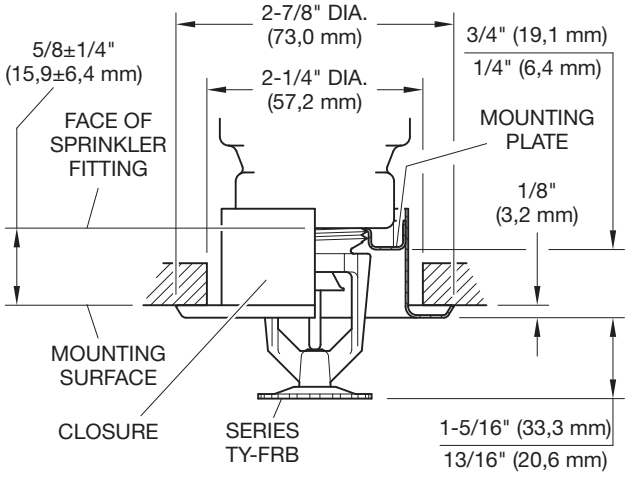


FIGURE 12
SERIES TY-FRB RECESSED PENDENT
WITH TWO-PIECE 3/4 INCH TOTAL ADJUSTMENT
STYLE 40 RECESSED ESCUTCHEON
8.0 K-FACTOR, 3/4 IN. NPT

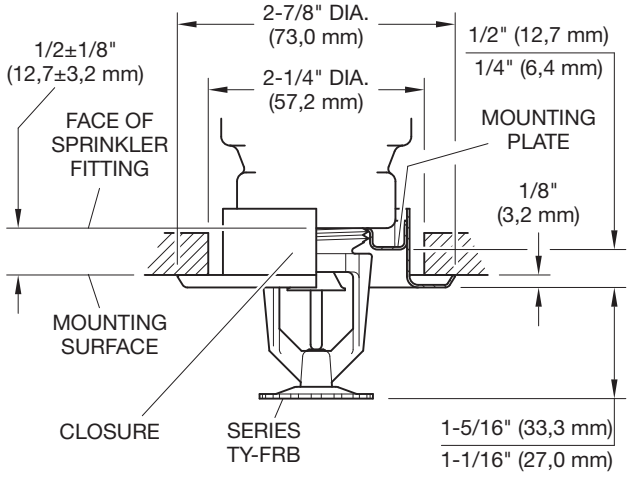


FIGURE 13
SERIES TY-FRB RECESSED PENDENT
WITH TWO-PIECE 1/2 INCH TOTAL ADJUSTMENT
STYLE 30 RECESSED ESCUTCHEON
8.0 K-FACTOR, 3/4 IN. NPT




FIGURE 14
W-TYPE 6 SPRINKLER
WRENCH




FIGURE 15
W-TYPE 7 RECESSED
SPRINKLER WRENCH

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 15 of 58

K-Factor	Type	Temperature	Bulb Liquid Color	Sprinkler Finish[5]		
				Natural Brass	Chrome Plated	Polyester[c]
2.8 1/2 in. NPT	Pendent (TY1231)	135°F (57°C)	Orange	1, 2, 3, 4		
		155°F (68°C)	Red			
		175°F (79°C)	Yellow			
		200°F (93°C)	Green			
		286°F (141°C)	Blue			
	Upright (TY1131)	135°F (57°C)	Orange			
		155°F (68°C)	Red			
		175°F (79°C)	Yellow			
		200°F (93°C)	Green			
		286°F (141°C)	Blue			
	Recessed Pendent (TY1231)[a] Figure 6	135°F (57°C)	Orange	1, 2, 4		
		155°F (68°C)	Red			
		175°F (79°C)	Yellow			
		200°F (93°C)	Green			
	Recessed Pendent (TY1231)[b] Figure 7	135°F (57°C)	Orange			
		155°F (68°C)	Red			
		175°F (79°C)	Yellow			
		200°F (93°C)	Green			

NOTES
a. Installed with Style 10 (1/2 in. NPT) or Style 40 (3/4 in. NPT) 3/4 in. Total Adjustment Recessed Escutcheon, as applicable.
b. Installed with Style 20 (1/2 in. NPT) or Style 30 (3/4 in. NPT) 1/2 in. Total Adjustment Recessed Escutcheon, as applicable.
c. Frame and Deflector only.
1. Listed by Underwriters Laboratories, Inc., (UL) as Quick Response Sprinklers.
2. Listed by Underwriters Laboratories, Inc., for use in Canada (C-UL) as Quick Response Sprinklers.
3. Approved by Factory Mutual Research Corporation (FM) as Quick Response Sprinklers.
4. Approved by the City of New York under MEA 354-01-E.
5. Where Polyester Coated Sprinklers are noted to be UL and C-UL Listed, the sprinklers are UL and C-UL Listed, the sprinklers are UL and C-UL Listed as corrosion-resistant sprinklers.

TABLE A
LABORATORY LISTINGS AND APPROVALS FOR
2.8 K-FACTOR SPRINKLERS

K-Factor	Type	Temperature	Bulb Liquid Color	Sprinkler Finish[3]		
				Natural Brass	Chrome Plated	Polyester[c]
4.2 1/2 in. NPT	Pendent (TY2231)	135°F (57°C)	Orange	1, 2		
		155°F (68°C)	Red			
		175°F (79°C)	Yellow			
		200°F (93°C)	Green			
		286°F (141°C)	Blue			
	Upright (TY2131)	135°F (57°C)	Orange			
		155°F (68°C)	Red			
		175°F (79°C)	Yellow			
		200°F (93°C)	Green			
		286°F (141°C)	Blue			
	Recessed Pendent (TY2231)[a] Figure 8	135°F (57°C)	Orange			
		155°F (68°C)	Red			
		175°F (79°C)	Yellow			
		200°F (93°C)	Green			
	Recessed Pendent (TY2231)[b] Figure 9	135°F (57°C)	Orange			
		155°F (68°C)	Red			
		175°F (79°C)	Yellow			
		200°F (93°C)	Green			

NOTES
a. Installed with Style 10 (1/2 in. NPT) or Style 40 (3/4 in. NPT) 3/4 in. Total Adjustment Recessed Escutcheon, as applicable.
b. Installed with Style 20 (1/2 in. NPT) or Style 30 (3/4 in. NPT) 1/2 in. Total Adjustment Recessed Escutcheon, as applicable.
c. Frame and Deflector only.
1. Listed by Underwriters Laboratories, Inc., (UL) as Quick Response Sprinklers.
2. Listed by Underwriters Laboratories, Inc., for use in Canada (C-UL) as Quick Response Sprinklers.
3. Where Polyester Coated Sprinklers are noted to be UL and C-UL Listed, the sprinklers are UL and C-UL Listed, the sprinklers are UL and C-UL Listed as corrosion-resistant sprinklers.

TABLE B
LABORATORY LISTINGS AND APPROVALS FOR
4.2 K-FACTOR SPRINKLERS

K-Factor	Type	Temperature	Bulb Liquid Color	Sprinkler Finish[8]				
				Natural Brass	Chrome Plated	Polyester[c]	Poly-Stainless[c]	Lead Coated
5.6 1/2 in. NPT	Pendent (TY3231)	135°F (57°C)	Orange	1, 2, 3, 4, 5, 6, 7			1, 2	1, 2, 3, 5
		155°F (68°C)	Red					
		175°F (79°C)	Yellow					
		200°F (93°C)	Green					
		286°F (141°C)	Blue					
	Upright (TY3131)	135°F (57°C)	Orange	1, 2, 3, 5, 6			1, 2	1, 2, 3, 5
		155°F (68°C)	Red					
		175°F (79°C)	Yellow					
		200°F (93°C)	Green					
		286°F (141°C)	Blue					
	Recessed Pendent (TY3231)[a] Figure 10	135°F (57°C)	Orange	1, 2, 4, 5			1, 2	N/A[d]
		155°F (68°C)	Red					
		175°F (79°C)	Yellow					
		200°F (93°C)	Green					
		286°F (141°C)	Blue					
	Recessed Pendent (TY3231)[b] Figure 11	135°F (57°C)	Orange	1, 2, 3, 4, 5			N/A	N/A
		155°F (68°C)	Red					
		175°F (79°C)	Yellow					
		200°F (93°C)	Green					
		286°F (141°C)	Blue					

NOTES
a. Installed with Style 10 (1/2 in. NPT) or Style 40 (3/4 in. NPT) 3/4 in. Total Adjustment Recessed Escutcheon, as applicable.
b. Installed with Style 20 (1/2 in. NPT) or Style 30 (3/4 in. NPT) 1/2 in. Total Adjustment Recessed Escutcheon, as applicable.
c. Frame and Deflector only.
d. Not available (N/A).
1. Listed by Underwriters Laboratories, Inc., (UL) as Quick Response Sprinklers.
2. Listed by Underwriters Laboratories, Inc., for use in Canada (C-UL) as Quick Response Sprinklers.
3. Approved by Factory Mutual Research Corporation (FM) as Quick Response Sprinklers.
4. Approved by the Loss Prevention Certification Board (LPCB Ref. No. 007k/04) as Quick Response Sprinklers. However, LPCB does not rate the thermal sensitivity of recessed sprinklers.
5. Approved by the City of New York under MEA 354-01-E.
6. VdS Approved (For details, contact Johnson Controls, Enschede, Netherlands, Tel. 31-53-428-4444/Fax 31-53-428-3377.)
7. Approved by the Loss Prevention Certification Board (LPCB Ref. No. 094a/06) as Quick Response Sprinklers.
8. Where Polyester Coated and Lead-Coated Sprinklers are noted to be UL and C-UL Listed, the sprinklers are UL and C-UL Listed as Corrosion-Resistant Sprinklers. Where Lead-Coated Sprinklers are noted to be FM Approved, the sprinklers are FM Approved as a Corrosion-Resistant Sprinklers.

TABLE C
LABORATORY LISTINGS AND APPROVALS FOR
5.6 K-FACTOR SPRINKLERS

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 18 of 58

K-Factor	Type	Temperature	Bulb Liquid Color	Sprinkler Finish[8]				
				Natural Brass	Chrome Plated	Polyester[c]	Poly-Stainless[c]	Lead Coated
8.0 3/4 in. NPT	Pendent (TY4231)	135°F (57°C)	Orange	1, 2, 3, 4, 5, 6, 7			1, 2	1, 2, 5
		155°F (68°C)	Red					
		175°F (79°C)	Yellow					
		200°F (93°C)	Green					
		286°F (141°C)	Blue					
	Upright (TY4131)	135°F (57°C)	Orange					
		155°F (68°C)	Red					
		175°F (79°C)	Yellow					
		200°F (93°C)	Green					
		200°F (93°C)	Blue					
	Recessed Pendent (TY4231)[a] Figure 12	135°F (57°C)	Orange	1, 2, 5			1, 2	N/A[d]
		155°F (68°C)	Red					
		175°F (79°C)	Yellow					
		200°F (93°C)	Green					
		286°F (141°C)	Blue					
	Recessed Pendent (TY4231)[b] Figure 13	135°F (57°C)	Orange	1, 2, 3, 5			N/A	N/A
		155°F (68°C)	Red					
		175°F (79°C)	Yellow					
		200°F (93°C)	Green					
		286°F (141°C)	Blue					
8.0 1/2 in. NPT	Pendent (TY4931)	135°F (57°C)	Orange	1, 2, 4, 5, 6			N/A	1, 2, 5
		155°F (68°C)	Red					
		175°F (79°C)	Yellow					
		200°F (93°C)	Green					
		286°F (141°C)	Blue					
	Upright (TY4831)	135°F (57°C)	Orange					
		155°F (68°C)	Red					
		175°F (79°C)	Yellow					
		200°F (93°C)	Green					
		286°F (141°C)	Blue					

NOTES

a. Installed with Style 10 (1/2 in. NPT) or Style 40 (3/4 in. NPT) 3/4 in. Total Adjustment Recessed Escutcheon, as applicable.
b. Installed with Style 20 (1/2 in. NPT) or Style 30 (3/4 in. NPT) 1/2 in. Total Adjustment Recessed Escutcheon, as applicable.
c. Frame and Deflector only.
d. Not available (N/A).
1. Listed by Underwriters Laboratories, Inc., (UL) as Quick Response Sprinklers.
2. Listed by Underwriters Laboratories, Inc., for use in Canada (C-UL) as Quick Response Sprinklers.
3. Approved by Factory Mutual Research Corporation (FM) as Quick Response Sprinklers.
4. Approved by the Loss Prevention Certification Board (LPCB Ref. No. 007k/04) as Quick Response Sprinklers. However, LPCB does not rate the thermal sensitivity of recessed sprinklers.
5. Approved by the City of New York under MEA 354-01-E.
6. VdS Approved (For details, contact Johnson Controls, Enschede, Netherlands, Tel. 31-53-428-4444/Fax 31-53-428-3377.)
7. Approved by the Loss Prevention Certification Board (LPCB Ref. No. 094a/06) as Quick Response Sprinklers.
8. Where Polyester Coated and Lead-Coated Sprinklers are noted to be UL and C-UL Listed, the sprinklers are UL and C-UL Listed as Corrosion-Resistant Sprinklers. Where Lead-Coated Sprinklers are noted to be FM Approved, the sprinklers are FM Approved as a Corrosion-Resistant Sprinklers.

TABLE D
LABORATORY LISTINGS AND APPROVALS FOR
5.6 AND 8.0 K-FACTOR SPRINKLERS

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 19 of 58

K-Factor	Type	Sprinkler Finish			
		Natural Brass	Chrome Plated	Polyester	Lead Coated
2.8 1/2 in. NPT	Pendent (TY1231) and Upright (TY1131)	175 psi (12,1 bar)			N/A[2]
	Recessed Pendent (TY1231)				
4.2 1/2 in. NPT	Pendent (TY2231) and Upright (TY2131)	175 psi (12,1 bar)			N/A
	Recessed Pendent (TY2231)				
5.6 1/2 in. NPT	Pendent (TY3231) and Upright (TY3131)	250 psi (17,2 bar) or 175 psi (12,1 bar)[1]			
	Recessed Pendent (TY3231)				
8.0 3/4 in. NPT	Pendent (TY4231) and Upright (TY4131)	175 psi (12,1 bar)			175 psi (12,1 bar)
	Recessed Pendent(TY4231)				N/A
8.0 1/2 in. NPT	Pendent (TY4931) and Upright (TY4831)	175 psi (12,1 bar)			175 psi (12,1 bar)

NOTES
1. The maximum working pressure of 250 psi (17,2 bar) only applies to the Listing by Underwriters Laboratories Inc. (UL); the Listing by Underwriters Laboratories, Inc. for use in Canada (C-UL); and, the Approval by the City of New York.
2. Not available (N/A).

TABLE E
MAXIMUM WORKING PRESSURE

Care and Maintenance

The TYCO Series TY-FRB 2.8, 4.2, 5.6, and 8.0 K-factor Upright, Pendent, and Recessed Pendent Sprinklers must be maintained and serviced in accordance with this section. Before closing a fire protection system main control valve for maintenance work on the fire protection system that it controls, obtain permission to shut down the affected fire protection systems from the proper authorities and notify all personnel who may be affected by this action.

Absence of the outer piece of an escutcheon, which is used to cover a clearance hole, can delay sprinkler operation in a fire situation.

Sprinklers which are found to be leaking or exhibiting visible signs of corrosion must be replaced.

Automatic sprinklers must never be painted, plated, coated, or otherwise altered after leaving the factory. Modified sprinklers must be replaced. Sprinklers that have been exposed to corrosive products of combustion, but have not operated, should be replaced if they cannot be completely cleaned by wiping the sprinkler with a cloth or by brushing it with a soft bristle brush.

Care must be taken to avoid damage to the sprinklers before, during, and after installation. Sprinklers damaged by dropping, striking, wrench twist/slippage, or the like, must be replaced. Also, replace any sprinkler that has a cracked bulb or that has lost liquid from its bulb. For more information, see Installation section.

The owner is responsible for the inspection, testing, and maintenance of their fire protection system and devices in compliance with this document, as well as with the applicable standards of the National Fire Protection Association such as NFPA 25, in addition to the standards of any other authorities having jurisdiction. Contact the installing contractor or sprinkler manufacturer regarding any questions.

Automatic sprinkler systems are recommended to be inspected, tested, and maintained by a qualified Inspection Service in accordance with local requirements and/or national codes.

Care must be exercised to avoid damage to the sprinklers before, during, and after installation. Sprinklers damaged by dropping, striking, wrench twist/slippage, or the like, must be replaced. Also, replace any sprinkler that has a cracked bulb or that has lost liquid from its bulb. For more information, see Installation section.

Initial and frequent visual inspections of random samples are recommended for corrosion-resistant sprinklers to verify the integrity of the corrosion-resistant material of construction. Thereafter, annual inspections per NFPA 25 should suffice.Inspections of corrosion-resistant sprinklers are recommended at close range, instead of from the floor level per NFPA. Inspection at close range can better determine the exact sprinkler condition and the long-term integrity of the corrosion-resistant material, which can be affected by the corrosive conditions present.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 20 of 58

P/N 57 – XXX – X – XXX

SIN		
330	2.8K UPRIGHT (1/2 in. NPT)	TY1131
331	2.8K PENDENT (1/2 in. NPT)	TY1231
340	4.2K UPRIGHT (1/2 in. NPT)	TY2131
341	4.2K PENDENT (1/2 in. NPT)	TY2231
370	5.6K UPRIGHT (1/2 in. NPT)	TY3131
371	5.6K PENDENT (1/2 in. NPT)	TY3231
390	8.0K UPRIGHT (3/4 in. NPT)	TY4131
391	8.0K PENDENT (3/4 in. NPT)	TY4231
360	8.0K UPRIGHT (1/2 in. NPT)	TY4831
361	8.0K PENDENT (1/2 in. NPT)	TY4931

SPRINKLER FINISH	
1	NATURAL BRASS
2	POLY-STAINLESS GREY ALUMINUM (RAL9007)[1] POLYESTER
3	PURE WHITE POLYESTER (RAL9010)[2]
4	SIGNAL WHITE POLYESTER (RAL9003)
5	JET BLACK POLYESTER (RAL9005)[3]
7	LEAD COATED
9	CHROME PLATED

TEMPERATURE RATINGS	
135	135°F (57°C)
155	155°F (68°C)
175	175°F (79°C)
200	200°F (93°C)
286	286°F (141°C)

NOTES
1. Available only on TY3131, TY3231, TY4131, and TY4231
2. Eastern Hemisphere sales only.
3. Available in only 2.8K, 4.2K, and 8.0K, 155°F (68°C) and 200°F (93°C); requires longer lead time to manufacture.

TABLE F
SERIES TY-FRB PENDENT AND UPRIGHT SPRINKLERS
PART NUMBER SELECTION

Limited Warranty

For warranty terms and conditions, visit www.tyco-fire.com.

Ordering Procedure

Contact your local distributor for availability. When placing an order, indicate the full product name and Part Number (P/N).

Sprinkler Assemblies with NPT Thread Connections
Specify: Series TY-FRB (Specify SIN), (specify K-factor), (specify Pendent or Upright) Sprinkler (specify) temperature rating, (specify) finish or coating, P/N (specify from Table F)

Recessed Escutcheon
Specify: Style (10, 20, 30, or 40) Recessed Escutcheon with (specify*) finish, P/N (specify*)

* Refer to Technical Data Sheet TFP770

Sprinkler Wrench
Specify: W-Type 6 Sprinkler Wrench, P/N 56-000-6-387

Specify: W-Type 7 Sprinkler Wrench, P/N 56-850-4-001

1400 Pennbrook Parkway, Lansdale, PA 19446 | Telephone +1-215-362-0700

© 2020 Johnson Controls. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.

NATIONAL FIRE PROTECTION ASSOCIATION and NFPA are registered trademarks of National Fire Protection Association;
TEFLON is a registered trademark of DuPont

Johnson Controls

tyco®

Worldwide Contacts | www.tyco-fire.com

Series TY-FRB — 5.6 K-factor Upright and Pendent Intermediate Level Sprinklers Quick Response

General Description

The Series TY-FRB, 5.6 K-factor Upright and Pendent Intermediate Level Sprinklers described in this data sheet are automatic sprinklers of the "quick response" 3 mm frangible bulb type. They are "standard spray" sprinklers intended for use in fire sprinkler systems designed in accordance with the standard installation rules recognized by the applicable Listing or Approval agency (e.g., UL Listing is based on NFPA requirements). Both the Upright and Pendent Sprinklers produce a hemispherical water distribution pattern below the deflector.

Intermediate Level Sprinklers are primarily designed for use in rack storage sprinkler systems where their thermally sensitive elements must be shielded from the water spray of higher elevation sprinklers that could operate earlier during a fire. Intermediate Level Sprinklers are also used in other applications such as beneath open gridded catwalks.

For additional Series TY-FRB Sprinkler information, see Technical Data Sheet TFP172. For additional Guard and Shield information, see Technical Data Sheet TFP780.

IMPORTANT

Refer to Technical Data Sheet TFP2300 for warnings pertaining to regulatory and health information.

Always refer to Technical Data Sheet TFP700 for the "INSTALLER WARNING" that provides cautions with respect to handling and installation of sprinkler systems and components. Improper handling and installation can permanently damage a sprinkler system or its components and cause the sprinkler to fail to operate in a fire situation or cause it to operate prematurely.

NOTICE

The Series TY-FRB Sprinklers described herein must be installed and maintained in compliance with this document, as well as with the applicable standards of the National Fire Protection Association, in addition to the standards of any other authorities having jurisdiction. Failure to do so may impair the performance of these devices.

The owner is responsible for maintaining their fire protection system and devices in proper operating condition. Contact the installing contractor or product manufacturer with any questions.

Sprinkler Identification Numbers

TY313 . . . . . .Upright 5.6K, 1/2 in. NPT
TY323 . . . . . Pendent 5.6K, 1/2 in. NPT

Technical Data

Approvals
UL and C-UL Listed
FM Approved
(Refer to Table A for complete approval information.)

Maximum Working Pressure
175 psi (12,1 bar)
250 psi (17,2 bar)*

* The Maximum Working Pressure of 250 psi (17,2 bar) only applies to the listing by Underwriters Laboratory.

Discharge Coefficient
K=5.6 GPM/psi½ (80,6 LPM/bar½)

Temperature Ratings
Refer to Table A





Finishes

TY-FRB Sprinkler	Brass
G1/S1 Guard with Shield	Red or Zinc
G1 Guard	Red or Zinc
S2 Shield	Zinc


Physical Characteristics

Frame	Bronze
Button	Brass/Copper
Sealing Assembly	Stainless Steel w/TEFLON
Bulb	Glass
Compression Screw	Bronze
Deflector	Copper
G1 and G1/S1 Guard	Painted or Plated Steel
S2 Shield	Plated Steel

Operation

The glass bulb contains a fluid which expands when exposed to heat. When the rated temperature is reached, the fluid expands sufficiently to shatter the glass bulb, allowing the sprinkler to activate and water to flow.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 22 of 58

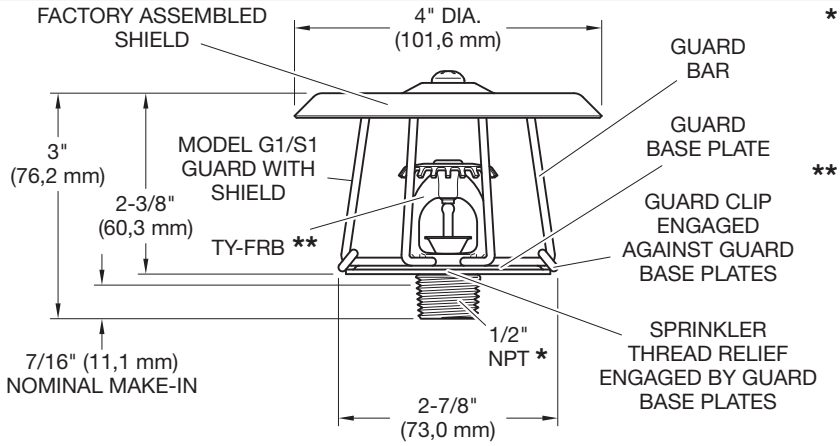


* Pipe thread connections per ISO 7-1 can be provided on special request.

** Temperature rating is indicated on Deflector.

TY-FRB Sprinkler and G1/S1 Guard with Shield are ordered seperately.

FIGURE 1
SERIES TY-FRB UPRIGHT (TY313) INTERMEDIATE LEVEL SPRINKLER WITH G1/S1 GUARD WITH SHIELD

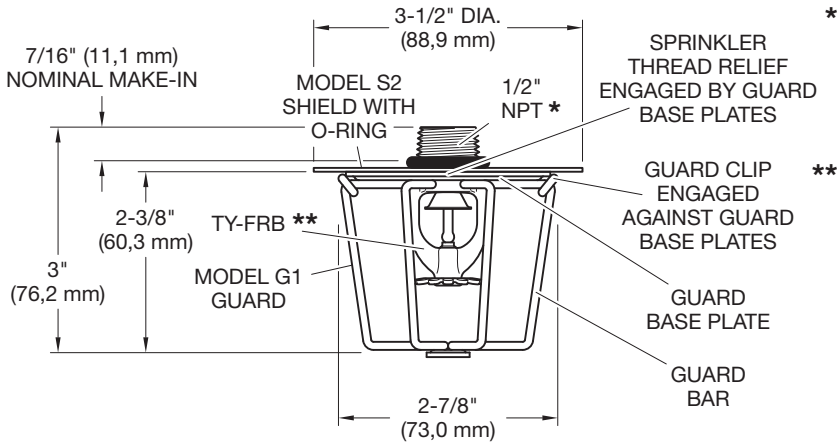


* Pipe thread connections per ISO 7-1 can be provided on special request.

** Temperature rating is indicated on Deflector.

TY-FRB Sprinkler, G1 Guard, and S2 Shield with O-Ring are ordered seperately.

FIGURE 2
SERIES TY-FRB PENDENT (TY323) INTERMEDIATE LEVEL SPRINKLER WITH S2 SHIELD AND G1 GUARD

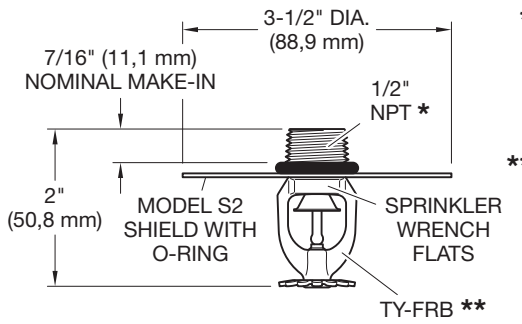

* Pipe thread connections per ISO 7-1 can be provided on special request.

** Temperature rating is indicated on Deflector.

TY-FRB Sprinkler and S2 Shield with O-Ring are ordered seperately.

FIGURE 3
SERIES TY-FRB PENDENT (TY323) INTERMEDIATE LEVEL SPRINKLER WITH S2 SHIELD

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 23 of 56

K	TYPE	TEMP.	BULB LIQUID	SPRINKLER FINISH
				NATURAL BRASS
5.6 1/2 in. NPT	**UPRIGHT (TY313) with Guard/ Shield (G1/S1)**	135°F (57°C)	Orange	1, 2, 3
		155°F (68°C)	Red	
		175°F (79°C)	Yellow	
		200°F (93°C)	Green	
		286°F (141°C)	Blue	
	PENDENT (TY323) with Guard/ Shield (G1/S2) or Shield only (S2)	135°F (57°C)	Orange	
		155°F (68°C)	Red	
		175°F (79°C)	Yellow	
		200°F (93°C)	Green	
		286°F (141°C)	Blue	

NOTES:
1. Listed by Underwriters Laboratories, Inc. (UL).
2. Listed by Underwriters Laboratories, Inc. for use in Canada (C-UL).
3. Approved by Factory Mutual Research Corporation (FM).

TABLE A
LABORATORY LISTINGS AND APPROVALS

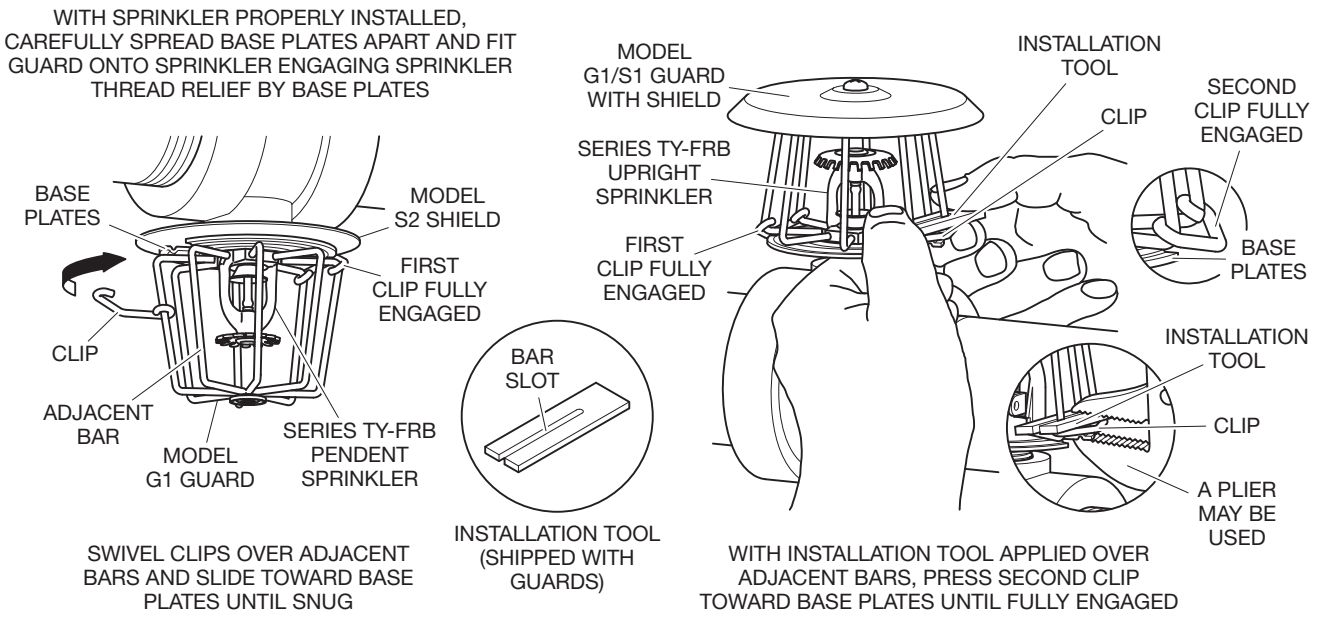


FIGURE 4
INSTALLATION PROCEDURES FOR MODEL G1 GUARD AND S2 SHIELD (PENDENT SPRINKLER) AND MODEL G1/S1 GUARD WITH SHIELD (UPRIGHT SPRINKLER)

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 24 of 58

Design Criteria

The Series TY-FRB, 5.6 K-factor Upright and Pendent Intermediate Level Sprinklers are intended for fire protection systems designed in accordance with the standard installation rules recognized by the applicable Listing or Approval agency (e.g., UL Listing is based on the requirements of NFPA 13, and FM Approval is based on the requirements of FM's Loss Prevention Data Sheets).

Installation

The Series TY-FRB, 5.6 K-factor Upright and Pendent Intermediate Level Sprinklers must be installed in accordance with this section:

General Instruction
Do not install any bulb type sprinkler if the bulb is cracked or there is a loss of liquid from the bulb. With the sprinkler held horizontally, a small air bubble should be present. The diameter of the air bubble is approximately 1/16 in. (1,6 mm) for the 135°F (57°C) to 3/32 in. (2,4 mm) for the 286°F (141°C) temperature ratings.

A leak tight 1/2 in. NPT sprinkler joint should be obtained with a torque of 7 to 14 lb-ft (9,5 to 19,0 N·m). Higher levels of torque may distort the sprinkler inlet and cause leakage or impairment of the sprinkler.

Upright Sprinklers
The Series TY-FRB Intermediate Level Upright Sprinklers must be installed in accordance with the following instructions.

Step 1. With pipe thread sealant applied to the pipe threads, hand tighten the sprinkler into the sprinkler fitting.

Step 2. Tighten the sprinkler into the sprinkler fitting using only the W-Type 6 Sprinkler Wrench (Ref. Figure 5). With reference to Figure 1, the W-Type 6 Sprinkler Wrench is to be applied to the wrench flats.

Step 3. Mount the Model G1/S1 Guard with Shield on the sprinkler. With the Clips loose, spread the two halves of the Sprinkler Guard enough to pass by the sprinkler deflector from the side.

Step 4. Spread the two halves of the Sprinkler Base Plates enough to pass over the sprinkler Thread Relief portion of the sprinkler. (Refer to Figure 1.)

Step 5. With the Sprinkler Guard positioned on the Thread Relief portion of the sprinkler, engage the Bars with Clips from opposing Guard Halves, then slide the Clips up until they are seated against the Base Plates, completing the installation as shown in Figure 1 and 4.

NOTE: To help assist with the sliding of the Clips, use the Guard Installation Tool as shown in Figure 4. Additionally, pliers can be used to facilitate the final seating of the Clips.

NOTICE

The Clips must seat against the Base Plates to be fully seated in order to complete the installation. The Model G1/S1 Guard with Shield may be located in any position relative to the sprinkler frame arms.

Pendent Sprinklers
The Series TY-FRB Intermediate Level Pendent Sprinklers must be installed in accordance with the following instructions.

Step A. Thread the S2 Shield on to the sprinkler threads with the stamped markings toward the deflector and just to the end of the threads. The final assembly step is easier to accomplish if the Shield is not disengaged by continuing to turn the Shield past the threads.

Step B. Roll the O-Ring over the sprinkler threads until it seats against the Shield.

Step C. With pipe thread sealant applied to the pipe threads, hand tighten the sprinkler into the sprinkler fitting.

Step D. Tighten the sprinkler into the sprinkler fitting using only the W-Type 6 Sprinkler Wrench (Ref. Figure 5). With reference to Figure 2 or 3, the W-Type 6 Sprinkler Wrench is to be applied to the wrench flats.

Step E. Rotate the S2 Shield clockwise (looking up) so that it slightly compresses the O-Ring between the Shield and sprinkler fitting.

Note: Installation of the S2 Shield only is completed at this point (Ref. Figure 3). If installing a G1 Guard, proceed to the next step.

Step F. Mount the Model G1 Guard on the sprinkler. With the Clips loose, spread the two halves of the Sprinkler Guard enough to pass by the sprinkler deflector from the side.

Step G. Spread the two halves of the Sprinkler Base Plates enough to pass over the sprinkler Thread Relief portion of the sprinkler. (Refer to Figure 2.)

Step H. With the Sprinkler Guard positioned on the Thread Relief portion of the sprinkler, engage the Bars with Clips from opposing Guard Halves, then slide the Clips up until they are seated against the Base Plates, completing the installation as shown in Figure 2 and 4.

NOTE: To help assist with the sliding of the Clips, use the Guard Installation Tool as shown in Figure 4. Additionally, pliers can be used to facilitate the final seating of the Clips.

NOTICE

The Clips must seat against the Base Plates to be fully seated in order to complete the installation. The Model G1 Guard may be located in any position relative to the sprinkler frame arms.




FIGURE 5
W-TYPE 6 SPRINKLER WRENCH

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 25 of 56

P/N 77 – XXX – X – XXX

SIN		
370	5.6K UPRIGHT[2] (1/2 in. NPT)[1]	TY313
371	5.6K PENDENT[3] (1/2 in. NPT)[1]	TY323

SPRINKLER FINISH	
1	NATURAL BRASS

TEMPERATURE RATING	
135	135°F (57°C)
155	155°F (68°C)
175	175°F (79°C)
200	200°F (93°C)
286	286°F (141°C)

1. Use suffix "I" for ISO 7-1 connection, for example, 77-370-1-175-I
2. Upright G1/S1 Guard with Shield Assembly must be ordered separately.
3. Model S2 Pendent Shield with O-Ring, and Optional Model G1 Guard must be ordered separately.

TABLE B
SERIES TY-FRB UPRIGHT AND PENDENT SPRINKLERS
PART NUMBER SELECTION

Care and Maintenance

The Series TY-FRB, 5.6 K-factor Upright and Pendent Intermediate Level Sprinklers must be maintained and serviced in accordance with this section:

Before closing a fire protection system main control valve for maintenance work on the fire protection system that it controls, permission to shut down the affected fire protection system must be obtained from the proper authorities and all personnel who may be affected by this action must be notified.

Sprinklers that are found to be leaking or exhibiting visible signs of corrosion must be replaced.

Automatic sprinklers must never be painted, plated, coated or otherwise altered after leaving the factory. Modified sprinklers must be replaced. Sprinklers that have been exposed to corrosive products of combustion, but have not operated, should be replaced if they cannot be completely cleaned by wiping the sprinkler with a cloth or by brushing it with a soft bristle brush.

Care must be exercised to avoid damage to the sprinklers -before, during, and after installation. Sprinklers damaged by dropping, striking, wrench twist/slippage, or the like, must be replaced. Also, replace any sprinkler that has a cracked bulb or that has lost liquid from its bulb. (Ref. Installation Section).

The owner is responsible for the inspection, testing, and maintenance of their fire protection system and devices in compliance with this document, as well as with the applicable standards of the National Fire Protection Association (e.g., NFPA 25), in addition to the standards of any other authorities having jurisdiction. Contact the installing contractor or product manufacturer with any questions.

It is recommended that automatic sprinkler systems be inspected, tested, and maintained by a qualified Inspection Service in accordance with local requirements and/or national code.

Limited Warranty

For warranty terms and conditions, visit www.tyco-fire.com.

Ordering Procedure

Contact your local distributor for availability. When placing an order, indicate the full product name and Part Numbers (P/N).

Series TY-FRB Intermediate Sprinklers are comprised of separately ordered components: Sprinkler, Guard, and/or Shield.

Upright Sprinkler Assemblies with NPT Thread Connections
Specify: Series TY-FRB Upright Intermediate Level Sprinkler, K=5.6, (specify SIN), Quick Response, (specify) temperature rating, (specify) finish, P/N (specify from Table B)

Pendent Sprinkler Assemblies with NPT Thread Connections
Specify: Series TY-FRB Pendent Sprinkler, K=5.6, (specify SIN), Quick Response, (specify) temperature rating, (specify) finish, P/N (specify from Table B).

Model G1/S1 Guard with Shield
Specify: Model G1/S1 Sprinkler Guard with Shield, (specify) finish, P/N (specify):

Red Painted . . . . . P/N 56-938-1-066
Zinc Chromate . . . . . P/N 56-938-9-066

Model G1 Sprinkler Guard
Specify: Model G1 Sprinkler Guard, (specify) finish, P/N (specify):

Red Painted . . . . . P/N 56-938-1-001
Zinc Chromate . . . . . P/N 56-938-9-001

Model S2 Pendent Shield with O-Ring
Specify: Model S2 Pendent Shield with O-Ring, 1/2 in. NPT, Series TY-FRB Pendent Sprinklers, P/N 56-070-9-332.

Sprinkler Wrench
Specify: W-Type 6 Sprinkler Wrench, P/N 56-000-6-387.

Additional* Guard Installation Tools
Specify: Guard Installation Tool for Model G1 Sprinkler Guards, P/N 56-000-8-597.

* The Guard Installation Tool is included with orders in original carton quantities.

1400 Pennbrook Parkway, Lansdale, PA 19446 | Telephone +1-215-362-0700


© 2018 Johnson Controls. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.

NATIONAL FIRE PROTECTION ASSOCIATION and NFPA are registered trademarks of National Fire Protection Association;
TEFLON is a registered trademark of DuPont

Johnson Controls

RSN 1596341
Permit # 2021-2037958-CT
Sheet 27 of 58

SCHEDULE 10 & 40

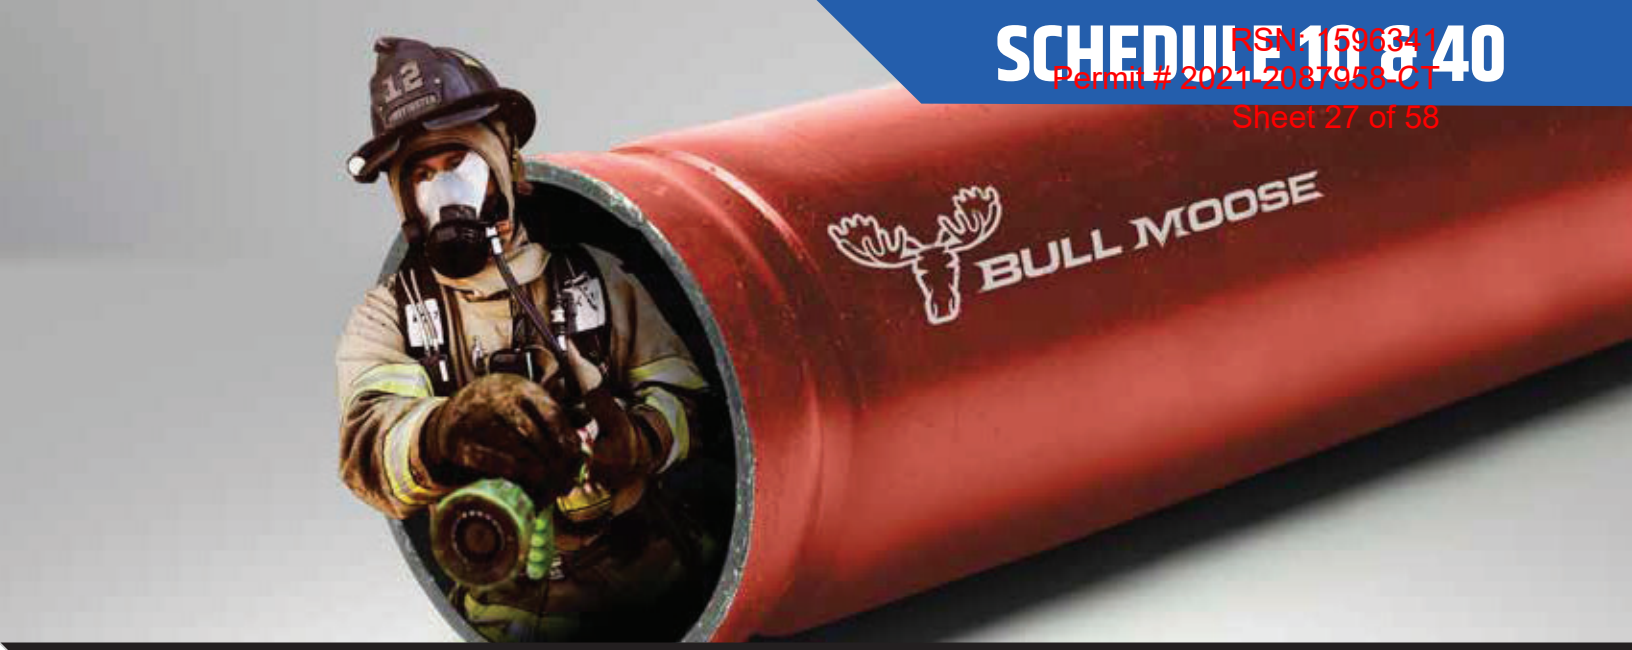

Always ready to protect your most valuable assets.

As the leading supplier of steel sprinkler pipe, we understand that there are no second chances in fire suppression. You need products of enduring quality and exceptional strength–plus reliable service. You need Bull Moose.

Bull Moose Fire Sprinkler Pipe Product Information

	Nominal Pipe Size (Inches)	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"	8"
SCHEDULE 10	O.D. (in)	1.315	1.660	1.900	2.375	2.875	3.500	4.500	6.625	8.625
	I.D. (in)	1.097	1.442	1.682	2.157	2.635	3.260	4.260	6.357	8.249
	Empty Weight (lb/ft)	1.410	1.810	2.090	2.640	3.530	4.340	5.620	9.290	16.940
	Water Filled Weight (lb/ft)	1.820	2.518	3.053	4.223	5.893	7.957	11.796	23.038	40.086
	C.R.R.	15.27	9.91	7.76	6.27	4.92	3.54	2.50	1.158	1.805
	Pieces per Lift	91	61	61	37	30	19	19	10	7
	Lift Weight (lbs) 21' lengths	2,695	2,319	2,677	2,051	2,224	1,732	2,242	1,951	2,490
	Lift Weight (lbs) 24' lengths	3,079	2,650	3,060	2,344	2,542	1,979	2,563	2,230	2,848
	Lift Weight (lbs) 25' lengths	3,208	2,760	3,187	2,442	2,648	2,062	2,670		

	NPS (In.)	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
SCHEDULE 40		1.315	1.660	1.900	2.375	2.875	3.500	4.500
		1.049	1.380	1.610	2.067	2.469	3.068	4.026
		1.680	2.270	2.720	3.660	5.800	7.580	10.800
		2.055	2.918	3.602	5.114	7.875	10.783	16.316
		1.00	1.00	1.00	1.00	1.00	1.00	1.00
		70	51	44	30	30	19	19
		2,470	2,431	2,513	2,306	3,654	3,024	4,309
		2,822	2,778	2,872	2,635	4,176	3,456	4,925
		2,940	2,894	2,992	2,745	4,350	3,601	5,130

SCHEDULE 10 & 40 ADVANTAGES:

- UL listed (US & Canada) and FM approved
- ASTM A135 and A795 Type E, Grade A Certified
- Complies with NFPA-13, 13R and 14
- Industry-leading hydraulic characteristics
- CRR of 1.0 and greater
- All pipe NDT weld tested

OTHER BENEFITS/SERVICES:

- We have the most stocking locations in the industry, for best delivery and availability
- Plain end or roll groove
- Eddy Guard II™ bacterial-resistant internal coating
- Custom length options
- Hot dipped galvanization
- Reddi-Pipe® red or black pipe eliminates field painting
- Compatible for use in wet, dry, preaction and deluge sprinkler systems
- The only maker with EPDs (to help earn LEED points).

Exclusive maker of Reddi-Pipe®
RED OR BLACK PAINTED PIPE.

CERTIFIED ENVIRONMENTAL PRODUCT DECLARATION UL.COM/EPD

cULus LISTED

FM APPROVED

NFPA

AFSA American Fire Sprinkler Association

NFSA The Voice of the Fire Sprinkler Industry

BULL MOOSE TUBE

800.325.4467
sales@BullMooseIndustries.com
BullMooseTube.com

Victaulic® FireLock™ Installation-Ready™ Rigid Couplings Style 009N and Style 109



Patented



Patented

1.0 PRODUCT DESCRIPTION

Available Sizes

- Style 009N: 1 ¼ – 12"/DN32 – DN300
- Style 109: 1 ¼ – 2 ½"/DN32 – 73.0 mm

Pipe Material

- Schedule 10, Schedule 40 or specialty carbon steel pipe listed in Section 5. For use with alternative materials and wall thicknesses please contact Victaulic
- Carbon Steel
- Stainless Steel
- For exceptions reference section 6.0 Notifications

Maximum Working Pressure

- Up to 365 psi/2517 kPa

Function

- Joins carbon steel pipe with grooved ends conforming to publication 25.01
- Provides a rigid pipe joint designed to restrict axial or angular movement

2.0 CERTIFICATION/LISTINGS

C104-1a/36

EN 10311
Regulation (EU)
No. 305/2011

ALWAYS REFER TO ANY NOTIFICATIONS AT THE END OF THIS DOCUMENT REGARDING PRODUCT INSTALLATION, MAINTENANCE OR SUPPORT.

System No.		Location	
Submitted By		Date	

Spec Section		Paragraph	
Approved		Date	

 © 2020 Victaulic Company. All rights reserved.

3.0 SPECIFICATIONS – MATERIAL

Housing: Ductile iron conforming to ASTM A 536, Grade 65-45-12. Ductile iron conforming to ASTM A 395, Grade 65-45-15, is available upon special request.

Housing Coating: (specify choice)

- ☐ Orange enamel (North America, Asia Pacific)
- ☐ Red enamel (Europe)
- ☐ Optional for Style 009N: Hot dipped galvanized

Gasket: (specify choice)

- ☑ **Grade "E" EPDM (Type A) Vic-Plus™ Pre-lubricated Gasket**
  EPDM (Violet Color Code). Applicable for wet and dry (oil-free air) fire protection systems only. Listed/Approved for continuous use in wet and dry systems. Listed/Approved for dry systems at -40°F/-40°C and above. Not compatible for use with hot water services or steam services.

NOTES

- Reference should always be made to publication I-100, Victaulic Field Installation Handbook for gasket lubrication instructions.
- Services listed are General Service Guidelines only. It should be noted that there are services for which these gaskets are not compatible. Reference should always be made to publication 05.01, Victaulic Gasket Selection Guide for specific gasket service guidelines and for a listing of services which are not compatible.

Bolts/Nuts: (specify choice)

- ☐ Standard: Carbon steel oval neck track bolts meeting the mechanical property requirements of ASTM A449 (imperial) and ISO 898-1 Class 9.8 (M10-M16) Class 8.8 (M20 and greater). Carbon steel hex nuts meeting the mechanical property requirements of ASTM A563 Grade B (imperial) and ASTM A563M Class 9 (metric). Track bolts and hex nuts are zinc electroplated per ASTM B633 Fe/Zn 5, finish Type III (imperial) or Type II (metric).
- ☐ Optional for Style 009N: Stainless steel oval neck track bolts meeting the requirements of ASTM F593, Group 2 (316 stainless steel), condition CW. Stainless steel Heavy Hex nuts meeting the requirements of ASTM F594, Group 2 (316 stainless steel), condition CW, with galling-resistant coating.[1]


[1] Optional bolts/nuts are available in imperial size only.

Coupling Linkage: High Strength Steel with comparable physical properties to that of the Track Bolt (ASTM A449). Linkage is zinc electroplated per ASTM B633 Fe/Zn 5, Type III Finish.


 © 2020 Victaulic Company. All rights reserved.

4.0 DIMENSIONS

Style 009N Two-Bolt *Installation-Ready* Coupling



Style 009N Pre-Assembled



Style 009N Joint Assembled

Size		Maximum Working Pressure[2]	Maximum End Load[2]	Allow. Pipe End Separation[3]	Bolt/Nut		Dimensions					Weight
							Pre-assembled		Joint Assembled			
Nominal inches DN	Actual Outside Diameter inches mm	psi kPa	lb N	inches mm	Qty.	Size inches mm	X inches mm	Y inches mm	X inches mm	Y inches mm	Z inches mm	Approx. (Each) lb kg
1 ¼ DN32	1.660 42.4	365 2517	790 3514	0.10 2.54	2	⅜ × 2 M10 x 51	3.13 79	5.00 127	2.75 70	5.00 127	2.00 51	1.4 0.6
1 ½ DN40	1.900 48.3	365 2517	1035 4604	0.10 2.54	2	⅜ × 2 M10 x 51	3.38 86	5.13 130	3.00 76	5.13 130	2.00 51	1.5 0.7
2 DN50	2.375 60.3	365 2517	1617 7193	0.12 3.05	2	⅜ × 2½ M10 x 63	4.00 102	5.63 143	3.50 89	5.63 143	2.00 51	1.9 0.9
2½	2.875 73.0	365 2517	2370 10542	0.12 3.05	2	⅜ × 2½ M10 x 63	4.50 114	6.13 156	4.00 102	6.13 156	2.00 51	2.1 1.0
DN65	3.000 76.1	365 2517	2580 11476	0.12 3.05	2	⅜ × 2½ M10 x 63	4.63 118	6.00 152	4.13 105	6.13 156	2.00 51	2.1 1.0
3 DN80	3.500 88.9	365 2517	3512 15622	0.12 3.05	2	⅜ × 2½ M10 x 63	5.13 130	6.75 171	4.63 117	6.75 171	2.00 51	2.3 1.0
4 DN100	4.500 114.3	365 2517	5805 25822	0.17 4.32	2	⅜ × 2½ M10 x 63	6.00 152	7.88 200	5.63 143	7.50 191	2.13 54	2.9 1.3
	4.250 108.0	365 2517	5178 23020	0.17 4.32	2	⅜ × 2½ M10 x 63	5.63 152	7.38 1.87	5.38 137	7.38 187	2.13 54	3.1 1.4
5	5.563 141.3	365 2517	8872 39456	0.17 4.32	2	½ × 3 M12 x 76	7.25 184	9.25 235	6.75 171	9.13 232	2.25 57	5.0 2.3
	5.250 133.0	365 2517	7901 35106	0.17 4.32	2	½ × 3 M12 x 76	6.63 168	9.00 229	6.38 162	9.00 229	2.25 57	4.8 2.2
DN125	5.500 139.7	365 2517	8672 38529	0.17 4.32	2	½ × 3 M12 x 76	6.88 175	9.25 235	6.75 171	9.13 232	2.25 57	4.9 2.2
6 DN150	6.625 168.3	365 2517	12582 44469	0.17 4.32	2	½ × 3¼ M12 x 83	8.38 213	10.38 264	7.88 200	10.13 257	2.25 57	6.0 2.7
	6.250 159.0	365 2517	11198 49753	0.17 4.32	2	½ × 3 ¼ M12 x 83	7.88 200	10.00 254	7.38 187	9.88 251	2.25 57	5.6 2.5
	6.500 165.1	365 2517	12112 53813	0.17 4.32	2	½ × 3 ¼ M12 x 83	8.00 203	10.25 260	7.75 197	10.13 257	2.25 57	6.0 2.7
8 DN200	8.625 219.1	365 2517	21326 94863	0.17 4.32	2	⅝ × 4 M16 x 101	10.88 276	13.38 340	10.25 260	13.13 333	2.50 64	11.4 5.2
	8.500 216.0	365 2517	20712 55968	0.17 4.32	2	⅝ × 4 M16 x 101	10.63 270	13.25 337	10.25 260	10.13 257	2.63 67	11.4 5.2
10 DN250	10.750 273.0	300 2068	27229 121121	0.25 6.4	2	⅞ × 6½ M22 x 165	13.75 349	17.00 432	13.25 337	17.13 435	2.75 70	22.6 10.3
12 DN300	12.750 323.9	300 2068	38303 170380	0.25 6.4	2	⅞ × 6½ M22 x 165	16.00 406	19.00 483	15.50 394	19.13 486	2.75 70	27.6 12.5

[2] Working Pressure and End Load are total, from all internal and external loads, based on standard weight (ANSI) steel pipe, standard roll or cut grooved in accordance with Victaulic specifications. See the Listings/Approvals section of this publication for ratings on other pipe.

[3] The allowable pipe separation dimension shown is for system layout purposes only. Style 009N couplings are considered rigid connections and will not accommodate expansion or contraction of the piping system.


NOTES

- When assembling Style 009N or Style 109 couplings onto end caps, take additional care to make certain the end cap is fully seated against the gasket end stop. For Style 009N or Style 109 couplings, use FireLock No. 006 end caps containing the "EZ" marking on the inside face or No. 60 end caps containing the "QV EZ" marking on the inside face. Non-Victaulic end cap products shall not be used with Style 009N or Style 109 couplings. IMPORTANT: Gaskets intended for the Style 009 or Style 009V couplings cannot be used with the Style 009N or Style 109 coupling. There is no interchanging of gaskets or housings between coupling styles.
- **Use Of FlushSeal Gaskets For Dry Pipe Systems** Style 009N or Style 109 couplings are supplied with Grade "E" Type A gaskets. These gaskets include an integral pipe stop, that once installed provides the similar benefits as a FlushSeal gasket for dry pipe systems. It should be noted that standard Victaulic FlushSeal gaskets cannot be used with the Style 009N or Style 109 couplings.


 © 2020 Victaulic Company. All rights reserved.

4.1 DIMENSIONS

Style 109 One-Bolt *Installation-Ready* Coupling



Style 109 Pre-Assembled



Style 109 Joint Assembled

Size		Maximum Working Pressure[4]	Maximum End Load[4]	Pipe End Separation Allowable[5]	Bolt/Nut		Dimensions								Weight
							Pre-assembled				Joint Assembled				
Nominal	Actual Outside Diameter				Qty.	Size	YL	YB	X	Z	YL	YB	X	Z	Approx. (Each)
inches mm	inches mm	psi kPa	lb N	inches mm		inches mm	inches mm	inches mm	inches mm	inches mm	inches mm	inches mm	inches mm	inches mm	lb kg
1 ¼ DN32	1.660 42.4	365 2517	790 3514	0.10 2.54	1	⅜ x 2 ¼ M10 x 57	1.88 48	2.50 64	3.13 79	1.88 48	1.88 48	2.63 67	2.75 70	1.88 48	1.4 0.6
1 ½ DN40	1.900 48.3	365 2517	1035 4604	0.10 2.54	1	⅜ x 2 ¼ M10 x 57	2.00 51	2.63 67	3.25 83	1.88 48	2.00 51	2.75 70	3.00 76	1.88 48	1.5 0.7
2 DN50	2.375 60.3	365 2517	1616 7193	0.12 3.05	1	⅜ x 2 ½ M10 x 63	2.25 57	2.88 73	3.88 98	2.00 51	2.25 57	3.13 79	3.50 89	2.00 51	1.8 0.8
2 ½	2.875 73.0	365 2517	2370 10542	0.12 3.05	1	⅜ x 2 ½ M10 x 63	2.50 64	3.13 79	4.38 111	2.00 51	2.50 64	3.38 86	3.88 98	2.00 51	2.1 0.9

[4] Working Pressure and End Load are total, from all internal and external loads, based on standard weight (ANSI) steel pipe, standard roll or cut grooved in accordance with Victaulic specifications. See the Listings/Approvals section of this publication for ratings on other pipe.

[5] The allowable pipe separation dimension shown is for system layout purposes only. Style 109 couplings are considered rigid connections and will not accommodate expansion or contraction of the piping system.

NOTES

- When assembling Style 009N or Style 109 couplings onto end caps, take additional care to make certain the end cap is fully seated against the gasket end stop. For Style 009N or Style 109 couplings, use FireLock No. 006 end caps containing the "EZ" marking on the inside face or No. 60 end caps containing the "QV EZ" marking on the inside face. Non-Victaulic end cap products shall not be used with Style 009N or Style 109 couplings. IMPORTANT: Gaskets intended for the Style 009 or Style 009V couplings cannot be used with the Style 009N or Style 109 coupling. There is no interchanging of gaskets or housings between coupling styles.
- **Use Of FlushSeal Gaskets For Dry Pipe Systems** Style 009N or Style 109 couplings are supplied with Grade "E" Type A gaskets. These gaskets include an integral pipe stop, that once installed provides the similar benefits as a FlushSeal gasket for dry pipe systems. It should be noted that standard Victaulic FlushSeal gaskets and cannot be used with the Style 009N or Style 109 couplings.

 © 2020 Victaulic Company. All rights reserved.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 32 of 58

5.0 PERFORMANCE

Style 009N Two-Bolt *Installation-Ready* Coupling Listings/Approvals[6]

The information provided below is based on the latest listing and approval data at the time of publication. Listings/Approvals are subject to change and/or additions by the approval agencies. Contact Victaulic for performance on other pipe and the latest listings and approvals.

Size		cULus[11]		FM[11]		VdS	LPCB
Nominal inches DN	**Actual Outside Diameter** inches mm	**Sch. 10** psi kPa bar	**Sch. 40** psi kPa bar	**Sch. 10** psi kPa bar	**Sch. 40** psi kPa bar	psi kPa bar	psi kPa bar
1 ¼ DN32	1.660 42.4	365 2517 25	365 2517 25	363 2503 25	363 2503 25	363 2500 25	363 2500 25
1 ½ DN40	1.900 48.3	365 2517 25	365 2517 25	363 2503 25	363 2503 25	363 2500 25	363 2500 25
2 DN50	2.375 60.3	365 2517 25	365 2517 25	363 2503 25	363 2500 25	363 2500 25	363 2500 25
2 ½	2.875 73.0	365 2517 25	365 2517 25	363 2503 25	363 2500 25	363 2500 25	363 2500 25
DN65	3.000 76.1	365[7] 2517[7] 25[7]	N/A	363[8] 2503[8] 25[8]	N/A	363 2500 25	363 2500 25
3 DN80	3.500 88.9	365 2517 25	365 2517 25	363 2503 25	363 2503 25	363 2500 25	363 2500 25
4 DN100	4.500 114.3	365 2517 25	365 2517 25	363 2503 25	363 2503 25	363 2500 25	363 2500 25
	4.250 108.0	N/A	N/A	363 2503 25	363 2503 25	N/A	N/A
5	5.563 141.3	290 2000 20	365 2517 25	363 2503 25	363 2503 25	232 1600 16	363 2500 25
	5.250 133.0	N/A	N/A	363[8] 2503[8] 25	N/A	N/A	N/A
DN125	5.500 139.7	290[9] 2000[9] 20[9]	N/A	363[8] 2503[8] 25[8]	N/A	232 1600 25	363 2500 25
6 DN150	6.625 168.3	300 2068 20	365 2517 25	363 2503 25[7]	363 2503 25	232 1600 16	363 2500 25
	6.250 159.0	N/A	N/A	363[8] 2503[8] 25	N/A	N/A	N/A
	6.500 165.1	290[10] 2000[10] 20	N/A	363[8] 2503[8] 25[8]	N/A	N/A	363 2500 25

6 Listed/Approved for continuous use in wet and dry systems. Listed/Approved for dry systems -40° F/C and above. Please see the Victaulic Installation Manual I-009N for details concerning when supplemental lubrication is required.

7 cULus listed for DIN 2458 (EN 10220) 2.6 mm pipe wall.

8 FM approved for BS 1387 (EN 10255) Medium 3.6 mm pipe wall.

9 cULus listed for EN 10220 4.0 mm pipe wall.

10 cULus listed for EN 10255 4.5 mm pipe wall.

11 With optional stainless steel fasteners, cULus Listed to 175psi/1207 kPa/12 bar and FM Approved to the FM ratings shown in the above table. The stainless steel fasteners have a marking designation of "316" on the end face of the bolt.

12 cUL listed to 250 psi/1720 kPa /17 bar.

 © 2020 Victaulic Company. All rights reserved.

5.0 PERFORMANCE (CONTINUED)

Style 009N Two-Bolt *Installation-Ready* Coupling Listings/Approvals[6]

The information provided below is based on the latest listing and approval data at the time of publication. Listings/Approvals are subject to change and/or additions by the approval agencies. Contact Victaulic for performance on other pipe and the latest listings and approvals.

Size		cULus[11]		FM[11]		VdS	LPCB
Nominal inches DN	**Actual Outside Diameter** inches mm	**Sch. 10** psi kPa bar	**Sch. 40** psi kPa bar	**Sch. 10** psi kPa bar	**Sch. 40** psi kPa bar	psi kPa bar	psi kPa bar
8 DN200	8.625 219.1	300 2068 20	365 2517 25	363 2503 25	363 2503 25	232 1600 16	363 2500 25
	8.500 216.0	290 2000 20	N/A	363[8] 2503[8] 25[7]	N/A	N/A	N/A
10 DN250	10.750 273.0	300 2068 20	300 2068 20	300 2068 20	300 2068 20	N/A	N/A
12 DN300	12.750 323.9	300[12] 2068[12] 20[12]	300 2068 25	250 1720 17	300 2068 20	N/A	N/A

6 Listed/Approved for continuous use in wet and dry systems. Listed/Approved for dry systems -40° F/C and above. Please see the Victaulic Installation Manual I-009N for details concerning when supplemental lubrication is required.

7 cULus listed for DIN 2458 (EN 10220) 2.6 mm pipe wall.

8 FM approved for BS 1387 (EN 10255) Medium 3.6 mm pipe wall.

9 cULus listed for EN 10220 4.0 mm pipe wall.

10 cULus listed for EN 10255 4.5 mm pipe wall.

11 With optional stainless steel fasteners, cULus Listed to 175psi/1207 kPa/12 bar and FM Approved to the FM ratings shown in the above table. The stainless steel fasteners have a marking designation of "316" on the end face of the bolt.

12 cUL listed to 250 psi/1720 kPa /17 bar.

5.1 PERFORMANCE

Style 109 One-Bolt *Installation-Ready* Coupling Listings/Approvals[13]

The information provided below is based on the latest listing and approval data at the time of publication. Listings/Approvals are subject to change and/or additions by the approvals agencies. Contact Victaulic for performance on other pipe and the latest listings and approvals.

Size		cULus		FM	
Nominal inches DN	**Actual Outside Diameter** inches mm	**Sch. 10** psi kPa bar	**Sch. 40** psi kPa bar	**Sch. 10** psi kPa bar	**Sch. 40** psi kPa bar
1 ¼ DN32	1.660 42.4	365 2517 25	365 2517 25	365 2517 25	365 2517 25
1 ½ DN40	1.900 48.3	365 2517 25	365 2517 25	365 2517 25	365 2517 25
2 DN50	2.375 60.3	365 2517 25	365 2517 25	365 2517 25	365 2517 25
2½	2.875 73.0	365 2517 25	365 2517 25	365 2517 25	365 2517 25

13 Listed/Approved for continuous use in wet and dry systems. Listed/Approved for dry systems -40° F/C and above. Please see the Victaulic Installation Manual I-109 for details concerning when supplemental lubrication is required.

 © 2020 Victaulic Company. All rights reserved.

5.2 PERFORMANCE

Specialty Pipe
Style 009N Two-Bolt *Installation-Ready* Coupling Listings/Approvals

Pipe Type	Size inches DN	Pressure Rating cULus psi kPa bar	Pressure Rating FM psi kPa bar
EF	1 ¼ – 4 DN32 – DN100	300 2068 20	N/A
EL	1 ¼ – 2 DN32 – DN50	300 2068 20	300 2068 20
ET40	1 ¼ – 2 DN32 – DN50	300 2068 20	N/A
EZF	3 – 4 DN80 – DN100	300 2068 20	N/A
EZT	1 ¼ – 2 DN32 – DN50	300 2068 20	300 2068 20
FF	1 ½ – 4 DN40 – DN100	300 2068 20	N/A
GL	1 ¼ – 2 DN32 – DN50	300 2068 20	300 2068 20
MF	1 ¼ – 4 DN32 – DN100	300 2068 20	300 2068 20
	6 DN150	175 1205 12	175 1205 12
MT	1 ¼ – 2 DN32 – DN50	300 2068 20	300 2068 20
MLT	1 ¼ – 2 DN32 – DN50	N/A	300 2068 20
TF	2 ½ – 4 73.0 mm – DN100	N/A	300 2068 20
WG5, WG5E, WF5, WG7, WG7E, WL7	1 ¼ – 4 DN32 – DN100	175 1205 12	300 2068 20
WLS	1 ¼ – 2 DN32 – DN50	300 2068 20	300 2068 20

NOTES

- EF = EDDY FLOW steel pipe manufactured by Bull Moose Tube Co.
- EL = EDDYLITE steel pipe manufactured by Bull Moose Tube Co.
- ET40 = Eddythread 40 steel pipe manufactured by Bull Moose Tube Co.
- EZF = EZ-Flow steel pipe manufactured by Northwest Pipe Co.
- EZT = EZ-Thread steel pipe manufactured by Youngstown Tube Co.
- FF = Fire-Flo steel pipe manufactured by Youngstown Tube Co.
- GL = GL steel pipe manufactured by Wheatland Tube Co.
- MF = Mega-Flow steel pipe manufactured by Wheatland Tube Co.
- MT = Mega-Thread steel pipe manufactured by Wheatland Tube Co.
- MLT = MLT steel pipe manufactured by Wheatland Tube Co
- TF = Tex-Flow steel pipe manufactured by Tex-Tube Co.
- WG5, WG5E, WF5 = WGalweld 5, WGalweld 5E, WFlow 5 steel pipe manufactured by Wuppermann Stahl GmbH.
- WG7, WG7E, WL7 = WGalweld 7, Wgalweld 7E, WLight 7 steel pipe manufactured by Wuppermann Stahl GmbH
- WLS = WLS steel pipe manufactured by Wheatland Tube Co.

 © 2020 Victaulic Company. All rights reserved.

5.3 PERFORMANCE

Specialty Pipe
Style 109 One-Bolt *Installation-Ready* Coupling Listings/Approvals

Pipe Type	Size inches DN	Pressure Rating cULus psi kPa bar	Pressure Rating FM psi kPa bar
EF	1 ¼ – 2 ½ DN32 – 73.0 mm	N/A	300 2068 20
	1 ½ – 2 ½ DN40 – 73.0 mm	300 2068 20	N/A
Easy-Flow	1 ¼ – 2 DN32 – DN50	N/A	300 2068 20
EL	1 ¼ – 2 DN32 – DN50	N/A	300 2068 20
ET40	1 ¼ – 2 DN32 – DN50	300 2068 20	300 2068 20
EZT	1 ¼ – 2 DN32 – DN50	N/A	300 2068 20
	1 ½ – 2 DN40 – DN50	300 2068 20	N/A
FF	1 ½ – 2 ½ DN40 – 73.0 mm	300 2068 20	300 2068 20
GL	1 ¼ – 2 DN32 – DN50	N/A	300 2068
MF	1 ¼ – 2 ½ DN32 – 73.0 mm	300 2068 20	300 2068 20
MT	1 ¼ – 2 DN32 – DN50	300 2068 20	300 2068 20
MLT	1 ¼ – 2 DN32 – DN50	300 2068 20	300 2068 20
TF	2 ½ 73.0 mm	N/A	300 2068 20
WG7, WG7E	1 ¼ – 2 DN32 – DN50	N/A	300 2068 20
WLS	1 ¼ – 2 DN32 – DN50	N/A	300 2068 20

NOTES

- EF = EDDY FLOW steel pipe manufactured by Bull Moose Tube Co.
- Easy-Flow = Easy-Flow steel pipe manufactured by Borusan Mannesmann Boru.
- EL = EDDYLITE steel pipe manufactured by Bull Moose Tube Co.
- ET40 = Eddythread 40 steel pipe manufactured by Bull Moose Tube Co.
- EZT = EZ-Thread steel pipe manufactured by Youngstown Tube Co.
- FF = Fire-Flo steel pipe manufactured by Youngstown Tube Co.
- GL = GL steel pipe manufactured by Wheatland Tube Co.
- MF = Mega-Flow steel pipe manufactured by Wheatland Tube Co.
- MT = Mega-Thread steel pipe manufactured by Wheatland Tube Co.
- MLT = MLT steel pipe manufactured by Wheatland Tube Co.
- TF = Tex-Flow steel pipe manufactured by Tex-Tube Co.
- WG7, WG7E = WGalweld 7 and WGalweld 7E steel pipe manufactured by Wuppermann Stahl GmbH.
- WLS = WLS steel pipe manufactured by Wheatland Tube Co.

 © 2020 Victaulic Company. All rights reserved.

6.0 NOTIFICATIONS

⚠ WARNING



- **Read and understand all instructions before attempting to install any Victaulic products.**
- **Always verify that the piping system has been completely depressurized and drained immediately prior to installation, removal, adjustment, or maintenance of any Victaulic products.**
- **Wear safety glasses, hardhat, and foot protection.**

Failure to follow these instructions could result in death or serious personal injury and property damage.

- **These products shall be used only in fire protection systems that are designed and installed in accordance with current, applicable National Fire Protection Association (NFPA 13, 13D, 13R, etc.) standards, or equivalent standards, and in accordance with applicable building and fire codes. These standards and codes contain important information regarding protection of systems from freezing temperatures, corrosion, mechanical damage, etc.**
- **The installer shall understand the use of this product and why it was specified for the particular application.**
- **The installer shall understand common industry safety standards and potential consequences of improper product installation.**
- **It is the system designer's responsibility to verify suitability of materials for use with the intended fluid media within the piping system and external environment.**
- **The material specifier shall evaluate the effect of chemical composition, pH level, operating temperature, chloride level, oxygen level, and flow rate on materials to confirm system life will be acceptable for the intended service.**

Failure to follow installation requirements and local and national codes and standards could compromise system integrity or cause system failure, resulting in death or serious personal injury and property damage.

NOTICE

- **Victaulic does not recommend the use of any furnace butt-welded pipe with sizes 2"/DN50 and smaller Victaulic gasketed joint products. This includes, but is not limited to, ASTM A53 Type F pipe.**

7.0 REFERENCE MATERIALS

05.01: Seal Selection Guide
25.01: Original Groove System (OGS) Groove Specifications
I-009N: Installation Instructions FireLock EZ™ Rigid Coupling Style 009N
I-100: Victaulic Field Installation Handbook
I-109: Installation Instructions FireLock™ One-Bolt Rigid Coupling Style 109
I-ENDCAP: Victaulic End Caps Installation Instructions

User Responsibility for Product Selection and Suitability
Each user bears final responsibility for making a determination as to the suitability of Victaulic products for a particular end-use application, in accordance with industry standards and project specifications, and the applicable building codes and related regulations as well as Victaulic performance, maintenance, safety, and warning instructions. Nothing in this or any other document, nor any verbal recommendation, advice, or opinion from any Victaulic employee, shall be deemed to alter, vary, supersede, or waive any provision of Victaulic Company's standard conditions of sale, installation guide, or this disclaimer.

Intellectual Property Rights
No statement contained herein concerning a possible or suggested use of any material, product, service, or design is intended, or should be constructed, to grant any license under any patent or other intellectual property right of Victaulic or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service, or design in the infringement of any patent or other intellectual property right. The terms "Patented" or "Patent Pending" refer to design or utility patents or patent applications for articles and/or methods of use in the United States and/or other countries.

Note
This product shall be manufactured by Victaulic or to Victaulic specifications. All products to be installed in accordance with current Victaulic installation/assembly instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

Installation
Reference should always be made to the Victaulic installation handbook or installation instructions of the product you are installing. Handbooks are included with each shipment of Victaulic products, providing complete installation and assembly data, and are available in PDF format on our website at www.victaulic.com.

Warranty
Refer to the Warranty section of the current Price List or contact Victaulic for details.

Trademarks
Victaulic and all other Victaulic marks are the trademarks or registered trademarks of Victaulic Company, and/or its affiliated entities, in the U.S. and/or other countries.

 © 2020 Victaulic Company. All rights reserved.

Victaulic® FireLock™ Fittings



1.0 PRODUCT DESCRIPTION

Available Sizes

- 1 ¼ – 8"/DN32 – DN200

Maximum Working Pressure

- Pressure ratings for Victaulic FireLock™ Fittings conform to the ratings of Victaulic FireLock EZ™ Style 009N couplings (refer to publication 10.64 for more information).

Application

- FireLock™ fittings are designed for use exclusively with Victaulic couplings that have been Listed or Approved for Fire Protection Services. Use of other couplings or flange adapters may result in bolt pad interference.
- Connects pipe, provides change in direction and adapts sizes or components

Pipe Materials

- Carbon steel

2.0 CERTIFICATION/LISTINGS

EN 10311
Regulation (EU)
No. 305/2011

3.0 SPECIFICATIONS – MATERIAL

Fitting: Ductile iron conforming to ASTM A536, Grade 65-45-12.

Fitting Coating:

- ☐ Orange enamel.
- ☐ Red enamel in Europe, Middle East, Africa, and India.
- ☐ Optional: Hot dipped galvanized.

ALWAYS REFER TO ANY NOTIFICATIONS AT THE END OF THIS DOCUMENT REGARDING PRODUCT INSTALLATION, MAINTENANCE OR SUPPORT.


System No.		Location	
Submitted By		Date	

Spec Section		Paragraph	
Approved		Date	


 © 2017 Victaulic Company. All rights reserved.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 38 of 58


4.0 DIMENSIONS



No. 001



No. 003



No. 002



No. 006

Nominal Size inches DN	Actual Outside Diameter inches mm	No. 001 90° Elbow C to E inches mm	No. 001 90° Elbow Approximate Weight Each lb kg	No. 003 45° Elbow C to E inches mm	No. 003 45° Elbow Approximate Weight Each lb kg	No. 002 Straight Tee C to E inches mm	No. 002 Straight Tee Approximate Weight Each lb kg	No. 006 Cap T inches mm	No. 006 Cap Approximate Weight Each lb kg
1 ¼ DN32	1.660 42.4	— —	— —	— —	— —	— —	— —	0.82 21	0.3 0.1
1 ½ DN40	1.900 48.3	— —	— —	— —	— —	— —	— —	0.82 21	0.4 0.2
2 DN50	2.375 60.3	2.75 70	1.7 0.8	2.00 51	1.8 0.8	2.75 70	2.4 1.1	0.88 22	0.6 0.3
2 ½	2.875 73.0	3.00 76	3.1 1.4	2.25 57	2.2 1.0	3.00 76	3.6 1.6	0.88 22	1.0 0.5
DN65	3.000 76.1	3.00 76	3.30 1.5	2.25 57	2.4 1.1	3.00 76	3.8 1.7	—	—
3 DN80	3.500 88.9	3.38 86	4.0 1.8	2.50 64	3.1 1.4	3.38 86	5.3 2.4	0.88 22	1.2 0.5
	4.250 108.0	4.00 102	5.7 2.6	3.00 76	5.1 2.3	4.00 102	7.5 3.4	—	—
4 DN100	4.500 114.3	4.00 102	6.7 3.0	3.00 76	5.6 2.5	4.00 102	8.7 3.9	1.00 25	2.4 1.1
5	5.563 141.3	4.88 124	12.6 5.7	3.25 83	8.3 3.8	4.88 124	15.7 7.1	1.00 25	4.1 1.9
DN125	5.500 139.7	4.88 124	12.4 5.6	3.25 82.6	8.2 3.7	4.88 124	15.4 6.9	—	—
	6.250 158.8	5.50 140	12.6 5.7	3.50 89	9.2 4.2	5.50 140	17.9 8.0	—	—
6 DN150	6.625 168.3	5.50 140	18.3 8.3	3.50 89	11.7 5.3	5.50 140	22.7 10.3	1.00 25	5.9 2.7
	6.500 165.1	5.43 140	17.6 7.9	3.50 89	11.4 5.2	5.50 140	22.0 9.9	—	—
8 DN200	8.625 219.1	6.81 173	25.5 11.6	4.25 108	20.4 9.3	6.94 176	38.7 17.6	1.13 29	12.7 5.8
	8.515 216.3	6.81 173	23.1 10.5	— —	— —	6.94 176	33.6 15.2	— —	— —

 © 2017 Victaulic Company. All rights reserved.

5.0 PERFORMANCE

Flow Data

Size		Frictional Resistance Equivalent of Straight Pipe[1]			
		Elbows		No. 002 Straight Tee	
Nominal Size inches DN	Actual Outside Diameter inches mm	No. 001 90° Elbow feet meters	No. 003 45° Elbow feet meters	Branch feet meters	Run feet meters
1 ¼ DN32	1.660 42.4	— —	— —	— —	— —
1 ½ DN40	1.900 48.3	— —	— —	— —	— —
2 DN50	2.375 60.3	3.5 1.1	1.8 0.5	8.5 2.6	3.5 1.1
2 ½	2.875 73.0	4.3 1.3	2.2 0.7	10.8 3.3	4.3 1.3
DN65	3.000 76.1	4.5 1.4	2.3 0.7	11.0 3.4	4.5 1.4
3 DN80	3.500 88.9	5.0 1.5	2.6 0.8	13.0 4.0	5.0 1.5
	4.250 108.0	6.4 2.0	3.2 0.9	15.3 4.7	6.4 2.0
4 DN100	4.500 114.3	6.8 2.1	3.4 1.0	16.0 4.9	6.8 2.1
5	5.563 141.3	8.5 2.6	4.2 1.3	21.0 6.4	8.5 2.6
DN125	5.500 139.7	8.3 2.5	4.1 1.3	20.6 6.3	8.3 2.5
	6.250 158.8	9.4 2.9	4.9 1.5	25.0 7.6	9.6 2.9
6 DN150	6.625 168.3	10.0 3.0	5.0 1.5	25.0 7.6	10.0 3.0
	6.500 165.1	9.8 3.0	4.9 1.5	24.5 7.5	9.8 3.0
8 DN200	8.625 219.1	13.0 4.0	5.0 1.5	33.0 10.1	13.0 4.0
	8.515 216.3	13.0 4.0	— —	33.0 10.1	13.0 4.0

[1] The flow data listed is based upon the pressure drop of Schedule 40 pipe.

 © 2017 Victaulic Company. All rights reserved.

6.0 NOTIFICATIONS

General Notes

NOTE: When assembling FireLock EZ™ couplings onto end caps, take additional care to make certain the end cap is fully seated against the gasket end stop. For FireLock EZ™ Style 009N/009H couplings, use FireLock™ No. 006 end caps containing the “EZ” marking on the inside face or No. 60 end caps containing the “QV EZ” marking on the inside face. Non-Victaulic end cap products shall not be used with Style 009/009V/009H/009N couplings.

7.0 REFERENCE MATERIALS

10.64: Victaulic® FireLock™ Rigid Coupling Style 009N

10.02: Victaulic® FireLock™ Rigid Coupling Style 005H with Vic-Plus™ Gasket System

29.01: Victaulic® Terms and Conditions of Sale

User Responsibility for Product Selection and Suitability
Each user bears final responsibility for making a determination as to the suitability of Victaulic products for a particular end-use application, in accordance with industry standards and project specifications, and the applicable building codes and related regulations as well as Victaulic performance, maintenance, safety, and warning instructions. Nothing in this or any other document, nor any verbal recommendation, advice, or opinion from any Victaulic employee, shall be deemed to alter, vary, supersede, or waive any provision of Victaulic Company’s standard conditions of sale, installation guide, or this disclaimer.

Intellectual Property Rights
No statement contained herein concerning a possible or suggested use of any material, product, service, or design is intended, or should be constructed, to grant any license under any patent or other intellectual property right of Victaulic or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service, or design in the infringement of any patent or other intellectual property right. The terms “Patented” or “Patent Pending” refer to design or utility patents or patent applications for articles and/or methods of use in the United States and/or other countries.

Note
This product shall be manufactured by Victaulic or to Victaulic specifications. All products to be installed in accordance with current Victaulic installation/assembly instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

Installation
Reference should always be made to the Victaulic installation handbook or installation instructions of the product you are installing. Handbooks are included with each shipment of Victaulic products, providing complete installation and assembly data, and are available in PDF format on our website at www.victaulic.com.

Warranty
Refer to the Warranty section of the current Price List or contact Victaulic for details.

Trademarks
Victaulic and all other Victaulic marks are the trademarks or registered trademarks of Victaulic Company, and/or its affiliated entities, in the U.S. and/or other countries.

 © 2017 Victaulic Company. All rights reserved.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 41 of 58

Mechanical-T® Bolted Branch Outlets

STYLES 920 AND 920N

SEE VICTAULIC PUBLICATION 10.01 FOR DETAILS



STYLES 920 AND 920N



STYLE 920 CROSS

PATENTED

Victaulic Mechanical-T® Outlet provides a direct branch connection at any location a hole can be cut in pipe. The hole is cut oversize to receive a "holefinder" locating collar which secures the outlet in position permanently. A pressure responsive gasket seals on the pipe O.D.

Cross-type connections can be achieved by utilizing two upper housings of the same style and size, with the same or differing branch size connections. NOTE: Style 920 and Style 920N housings cannot be mated to each other to achieve a cross connection.

Style 920 and Style 920N Mechanical-T outlets are available with grooved or female threaded outlet. Specify choice on order. Units are supplied painted with plated bolts. Galvanized housings are available, supplied with plated bolts.

All sizes of Style 920 and 920N are rated at 500 psi/3450 kPa working pressure on Schedule 10 and 40 carbon steel pipe. They may also be used on high density polyethylene or polybutylene (HDPE) pipe. Pressure ratings on HDPE are dependent on the pipe rating. Contact Victaulic for ratings on other pipe. **Style 920 and 920N are not recommended for use on PVC plastic pipe.**

Standard piping practices dictate that the Mechanical-T Styles 920 and 920N must be installed so that the main and branch connections are a true 90° angle when permanently attached to the pipeline surface.

Additionally, the Vic-Tap II® hole cutting tool, which allows for hole cutting capabilities on pressurized systems, utilizes the Style 920 Mechanical-T in conjunction with the Series 726 Vic-Ball Valve to create the Style 931 Vic-Tap II Mechanical-T unit. See page 8 for further information.

MATERIAL SPECIFICATIONS

Housing/Coating: Ductile iron conforming to ASTM A-536, grade 65-45-12, with orange enamel coating. Ductile iron conforming to ASTM A-395, grade 65-45-15, is available upon special request.

- **Optional:** Hot dipped galvanized

Gasket: (Specify choice*)

- **Grade "E" EPDM**
  EPDM (Green color code). Temperature range –30°F to +230°F/–34°C to +110°C. Recommended for cold and hot water service within the specified temperature range plus a variety of dilute acids, oil-free air and many chemical services. UL Classified in accordance with ANSI/NSF 61 for cold +86°F/+30°C and hot +180°F/+82°C. NOT RECOMMENDED FOR PETROLEUM SERVICES.

- **Grade "T" nitrile**
  Nitrile (Orange color code). Temperature range –20°F to +180°F/–29°C to +82°C. Recommended for petroleum products, air with oil vapors, vegetable and mineral oils within the specified temperature range. Not recommended for hot water services over +150°F/+66°C or for hot dry air over +140°F/+60°C.

*Services listed are General Service Recommendations only. It should be noted that there are services for which these gaskets are not recommended. Reference should always be made to the latest Victaulic Gasket Selection Guide for specific gasket service recommendations and for a listing of services which are not recommended.

Bolts/Nuts: Heat-treated plated carbon steel, trackhead meeting the physical and chemical requirements of ASTM A-449 and physical requirements of ASTM A-183.

JOB/OWNER

System No. _____

Location _____

CONTRACTOR

Submitted By _____

Date _____

ENGINEER

Spec Sect _____ Para _____

Approved _____

Date _____


VICTAULIC IS A REGISTERED TRADEMARK OF VICTAULIC COMPANY. © 2018 VICTAULIC COMPANY. ALL RIGHTS RESERVED.

RSN: 1596341
Permit # 2021-2087958-GT
Sheet 42 of 58


Mechanical-T® Bolted Branch Outlets

STYLES 920 AND 920N

DIMENSIONS



GROOVED OUTLET



FEMALE THREADED OUTLET

- Provides a direct branch connection at any location where a hole can be cut in the pipe
- A pressure responsive gasket provides the seal
- Request Publication 11.03 for Mechanical-T cross assemblies
- Pressure rated up to 500 psi/3450 kPa on steel pipe; also available for use with HDPE pipe
- Sizes from 2 × ½"/50 × 15 mm through 8 × 4"/200 × 100 mm

IMPORTANT NOTES:

Style 920 and Style 920N housings cannot be mated to one another to achieve cross connections.

Size		Style No.	Max. Work Pressure@	Dimensions							Approx. Weight Each	
Run × Branch Nominal Size Inches mm		920 or 920N	psi kPa	Hole Diameter +0.13 -0.00	T** Inches mm	V ‡ # Thd. Inches mm	V ‡ Grv. Inches mm	W Inches mm	Y Inches mm	Z Inches mm	Female Thd. Lbs. kg	Grv. Lbs. kg
2 50	× ½ (a) ¤ 15	920N	500 3450	1.50 38.1	2.00 51	2.53 64	—	1.61 41	5.35 136	2.75 70	3.1 1.5	—
	¾ (a) ¤ 20	920N	500 3450	1.50 38.1	1.97 50	2.53 64	—	1.61 41	5.35 136	2.75 70	3.1 1.5	—
	1 (a) ¤ 25	920N	500 3450	1.50 38.1	1.85 47	2.53 64	—	1.61 41	5.35 136	2.75 70	3.0 1.4	—
	1 ¼ (a) †¤ 32	920N	500 3450	1.75 44.5	2.05 52	2.75 70	3.00 76	1.61 41	5.35 136	3.00 76	3.5 1.7	3.2 1.5
	1 ½ (a) †¤ 40	920N	500 3450	1.75 44.5	2.03 52	2.75 70	3.12 79	1.61 41	5.35 136	3.25 83	3.6 1.7	3.2 1.5
2 ½ 65	× ½ (a) §¤ 15	920N	500 3450	1.50 38.1	2.21 56	2.74 70	—	1.82 46	5.64 143	2.75 70	3.0 1.4	—
	¾ (a) §¤ 20	920N	500 3450	1.50 38.1	2.18 55	2.74 70	—	1.82 46	5.64 143	2.75 70	3.0 1.4	—
	1 (a) §¤ 25	920N	500 3450	1.50 38.1	2.06 52	2.74 70	—	1.82 46	5.64 143	2.75 70	2.9 1.4	—
	1 ¼ † (a) ¤ 32	920N	500 3450	1.75 44.5	2.30 58	3.00 76	3.25 83	1.82 46	6.29 160	3.00 76	3.5 1.7	3.2 1.5
	1 ½ † (a) ¤ 40	920N	500 3450	2.00 50.8	2.28 58	3.00 76	3.25 83	1.82 46	6.26 159	3.25 83	3.6 1.7	3.3 1.6
76.1	× ½ (a) 15	920N	300 2065	1.50 38.1	2.22 56	2.75 70	—	2.25 57	6.46 164	3.18 81	3.9 1.8	—
	¾ (a) 20	920N	300 2065	1.50 38.1	2.19 56	2.75 70	—	2.25 57	6.46 164	3.18 81	3.9 1.8	—
	1 (a) 25	920N	300 2065	1.50 38.1	2.07 53	2.75 70	—	2.25 57	6.46 164	3.18 81	3.8 1.7	—
	1 ¼ (a) ¤ 32	920N	500 3450	1.75 44.5	2.30 58	3.00 76	3.31 84	1.92 49	6.29 160	3.00 76	3.5 1.6	3.2 1.5
	1 ½ (a) ¤ 40	920N	500 3450	2.00 50.8	2.28 58	3.00 76	3.31 84	1.92 49	6.29 160	3.25 83	3.5 1.6	3.3 1.5
3 80	× ½ (a) ¤ 15	920N	500 3450	1.50 38.1	2.52 64	3.05 78	—	2.28 58	6.15 156	2.75 70	3.4 1.6	—
	¾ (a) ¤ 20	920N	500 3450	1.50 38.1	2.49 63	3.05 78	—	2.28 58	6.15 156	2.75 70	3.4 1.6	—
	1 (a) 25	920N	500 3450	1.50 38.1	2.38 61	3.06 78	—	2.28 58	6.15 156	2.75 70	3.3 1.6	—
	1 ¼ (a) †¤ 32 (b)	920N	500 3450	1.75 44.5	2.55 65	3.25 83	3.56 90	2.28 58	6.15 156	3.00 76	3.8 1.8	3.7 1.8
	1 ½ (a) †¤ 40 (b)	920N	500 3450	2.00 50.8	2.78 71	3.50 89	3.56 90	2.28 58	6.15 156	3.25 83	4.1 1.9	3.8 1.8
	2 (a) ¤ 50	920N	500 3450	2.50 63.5	2.75 70	3.50 89	3.56 90	2.28 58	6.75 172	3.88 99	4.9 2.3	4.6 2.1
3 ½ 90	× 2 50	920N	500 3450	2.50 63.5	3.00 76	—	3.75 95	2.44 62	6.72 171	3.88 99	—	3.8 1.8

TABLE CONTINUED ON PG. 3

** Center of run to engaged pipe end, female threaded outlet only (dimensions approximate).

† Available with grooved or female threaded outlet. Specify choice on order.

‡ Center of run to end of fitting.

Female threaded outlets are available to NPT and BSPT specifications.

@ See page 7 for Fire Protection approvals and pressure ratings.

(a) British Standard female pipe threaded outlet is available as listed. Specify "BSPT" clearly on order.

(b) For 76.1 mm threaded outlet, specify 2½" BSPT clearly on order.

§ Vds approved for fire protection services

¤ LPCB approved for fire protection services

Ø Approved for use in China by Tianjin Approvals Company.


VICTAULIC IS A REGISTERED TRADEMARK OF VICTAULIC COMPANY. © 2018 VICTAULIC COMPANY. ALL RIGHTS RESERVED.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 43 of 58


Mechanical-T® Bolted Branch Outlets

STYLES 920 AND 920N

DIMENSIONS



GROOVED OUTLET



FEMALE THREADED OUTLET

- Provides a direct branch connection at any location where a hole can be cut in the pipe
- A pressure responsive gasket provides the seal
- Request Publication 11.03 for Mechanical-T cross assemblies
- Pressure rated up to 500 psi/3450 kPa on steel pipe; also available for use with HDPE pipe
- Sizes from 2 × ½"/50 × 15 mm through 8 × 4"/200 × 100 mm

Size		Style No.	Max. Work Pressure@	Dimensions							Approx. Weight Each	
Run × Branch Nominal Size Inches mm		920 or 920N	psi kPa	Hole Diameter +0.13 -0.00	T** Inches mm	V ‡ # Thd. Inches mm	V ‡ Grv. Inches mm	W Inches mm	Y Inches mm	Z Inches mm	Female Thd. Lbs. kg	Grv. Lbs. kg
TABLE CONTINUED FROM PAGE 2												
4 100 ×	½ (a) ¤ 15	920N	500 3450	1.50 38.1	3.03 77	3.56 90	—	2.69 68	7.01 178	2.75 70	3.7 1.8	—
	¾ (a) ¤ 20	920N	500 3450	1.50 38.1	3.00 76	3.56 90	—	2.69 68	7.01 178	2.75 70	3.7 1.8	—
	1 (a) ¤ 25	920N	500 3450	1.50 38.1	2.88 73	3.56 90	—	2.69 68	7.01 178	2.75 70	3.6 1.8	—
	1 ¼ (a) †¤ 32 (b)	920N	500 3450	1.75 44.5	3.08 78	3.78 96	4.00 102	2.69 68	7.01 178	3.00 76	4.0 1.9	3.6 1.8
	1 ½ (a) †¤ 40 (b)	920N	500 3450	2.00 50.8	3.28 83	4.00 102	4.00 102	2.69 68	7.01 178	3.25 83	4.2 2.0	3.9 1.9
	2 (a) †¤ 50	920N	500 3450	2.50 63.5	3.25 83	4.00 102	4.00 102	2.69 68	7.01 178	3.88 99	5.0 2.3	4.6 2.1
	2½ (a) † 65	920	500 3450	2.75 69.9	2.88 73	4.00 102	4.00 102	2.69 68	7.34 186	4.63 118	5.8 2.6	5.0 2.3
	76.1 mm	920	500 3450	2.75 69.9	2.88 73	—	4.00 102	2.69 68	7.34 186	4.63 118	—	6.4 2.9
	3 (a) † 80	920	500 3450	3.50 88.9	3.31 84	4.50 114	4.12 105	2.69 68	7.73 196	5.12 130	8.4 3.8	6.4 2.9
108.0 ×	1 ¼ (a)¤ 32	920N	500 3450	1.75 44.5	3.08 78	3.78 96	—	2.63 67	7.64 194	3.05 78	5.0 2.3	—
	1 ½ (a)¤ 40	920N	500 3450	2.00 50.8	3.28 83	4.00 102	—	2.63 67	7.64 194	3.25 83	5.0 2.3	—
	2 (a) 50	920N	500 3450	2.50 63.5	3.25 83	4.00 102	—	2.63 67	7.64 194	4.00 102	4.0 1.9	—
	76.1 mm	920	500 3450	2.75 69.9	2.88 73	4.00 102	4.00 102	2.63 67	7.64 194	4.29 109	8.0 3.6	7.8 3.5
	3 (a) 80	920	500 3450	3.50 88.9	3.31 84	4.50 114	4.50 114	2.63 67	7.63 194	4.88 124	6.8 3.1	6.5 3.0
5 125 ×	1 ½ (a) † 40	920	500 3450	2.00 50.8	4.03 102	4.75 121	4.75 121	3.16 80	9.70 246	3.69 94	7.4 3.4	7.6 3.4
	2 (a) † 50	920	500 3450	2.50 63.5	4.00 102	4.75 121	4.75 121	3.16 80	9.70 246	4.38 111	8.2 3.7	8.0 3.6
	2½ (a) † 65	920	500 3450	2.75 69.9	3.63 92	4.75 121	4.75 121	3.16 80	9.70 246	4.63 118	8.3 3.8	7.9 3.6
	76.1 mm ¤	920	500 3450	2.75 69.9	3.75 95	—	4.75 121	3.16 80	9.70 246	4.63 118	—	8.0 3.6
	3 (a) † 80	920	500 3450	3.50 88.9	3.81 97	5.00 127	4.63 118	3.16 80	9.70 246	5.31 135	8.4 3.8	8.8 4.0
133.0 ×	2 50	920N	500 3450	2.50 63.5	3.75 95	4.50 114	—	3.17 81	8.00 203	3.88 99	8.0 3.6	—
	3 80	920	500 3450	3.50 88.9	3.81 97	5.00 127	—	3.00 76	9.46 240	5.31 135	8.0 3.6	—
TABLE CONTINUED ON PG. 4												

IMPORTANT NOTES:

Style 920 and Style 920N housings cannot be mated to one another to achieve cross connections.

** Center of run to engaged pipe end, female threaded outlet only (dimensions approximate).

† Available with grooved or female threaded outlet. Specify choice on order.

‡ Center of run to end of fitting.

Female threaded outlets are available to NPT and BSPT specifications.

@ See page 7 for Fire Protection approvals and pressure ratings.

(a) British Standard female pipe threaded outlet is available as listed. Specify "BSPT" clearly on order.

(b) For 76.1 mm threaded outlet, specify 2½" BSPT clearly on order.

§ Vds approved for fire protection services

¤ LPCB approved for fire protection services

Ø Approved for use in China by Tianjin Approvals Company.


VICTAULIC IS A REGISTERED TRADEMARK OF VICTAULIC COMPANY. © 2018 VICTAULIC COMPANY. ALL RIGHTS RESERVED.

RSN: 1596341
Permit # 2021-2087958-GT
Sheet 44 of 58


Mechanical-T® Bolted Branch Outlets

STYLES 920 AND 920N

DIMENSIONS



GROOVED OUTLET



FEMALE THREADED OUTLET

- Provides a direct branch connection at any location where a hole can be cut in the pipe
- A pressure responsive gasket provides the seal
- Request Publication 11.03 for Mechanical-T cross assemblies
- Pressure rated up to 500 psi/3450 kPa on steel pipe; also available for use with HDPE pipe
- Sizes from 2 × ½"/50 × 15 mm through 8 × 4"/200 × 100 mm

IMPORTANT NOTES:

Style 920 and Style 920N housings cannot be mated to one another to achieve cross connections.

Size		Style No.	Max. Work Pressure@	Dimensions							Approx. Weight Each	
Run × Branch Nominal Size Inches mm		920 or 920N	psi kPa	Hole Diameter +0.13 -0.00	T** Inches mm	V ‡ # Thd. Inches mm	V ‡ Grv. Inches mm	W Inches mm	Y Inches mm	Z Inches mm	Female Thd. Lbs. kg	Grv. Lbs. kg
TABLE CONTINUED FROM PAGE 3												
139.7 ×	1½ † 40	920N	500 3450	2.00 50.8	3.78 96	4.50 114	—	3.30 84	8.23 209	3.25 83	7.0 3.2	—
	2 † 50	920N	500 3450	2.50 63.5	3.75 95	4.50 114	—	3.30 84	8.23 209	3.88 99	9.0 4.1	—
6 150 ×	1¼ (a) 32 (b)	920N	500 3450	1.75 44.5	4.43 112	5.13 130	5.13 130	3.79 96	9.15 232	3.25 83	5.1 2.3	4.8 2.2
	1½ (a) †¤ 40 (b)	920N	500 3450	2.00 50.8	4.40 112	5.13 130	5.13 130	3.79 96	9.15 232	3.25 83	5.4 2.4	5.1 2.3
	2 (a) †¤ 50	920N	500 3450	2.50 63.5	4.38 111	5.13 130	5.13 130	3.79 96	9.15 232	3.88 99	6.0 2.7	5.6 2.5
	2½ 65	920	500 3450	2.75 69.9	4.01 110	5.13 130	5.12 130	3.69 94	10.51 267	4.63 118	8.3 3.8	7.6 3.4
	76.1 mm ¤	920	500 3450	2.75 69.9	4.15 105	—	5.21 132	3.69 94	10.51 267	4.63 118	—	8.4 3.8
	3 (a) † 80	920	500 3450	3.50 88.9	4.31 110	5.50 140	5.13 130	3.69 94	10.51 267	5.31 135	9.9 4.5	8.4 3.8
	4 (a) †¤ 100	920	500 3450	4.50 114.3	3.81 97	5.75 146	5.38 137	3.69 94	10.51 267	6.25 159	10.1 4.6	10.1 4.6
159.0 ×	1½ (a) 40	920N	500 3450	2.00 50.8	4.41 112	5.13 130	—	3.63 92	9.40 239	3.25 83	7.8 3.5	—
	2 (a) 50	920N	500 3450	2.50 63.5	4.38 111	5.13 130	—	3.63 92	9.40 239	3.88 99	8.0 3.6	—
	76.1 mm	920	500 3450	2.75 69.9	4.38 111	5.50 140	5.13 130	3.63 92	9.40 239	4.63 118	9.5 4.3	9.5 4.3
	3 80	920	500 3450	3.50 88.9	4.31 110	5.50 140	5.13 130	3.63 92	9.40 239	5.31 135	8.1 3.7	14.0 6.4
	108.0 mm	920	500 3450	4.50 114.3	4.45 113	—	5.38 137	3.63 92	9.40 239	6.12 155	—	10.0 4.5
	4 100	920	500 3450	4.50 114.3	3.81 96.80	5.75 146	—	3.63 92	9.40 239	6.25 159	18.0 8.2	—
TABLE CONTINUED ON PG. 5												

** Center of run to engaged pipe end, female threaded outlet only (dimensions approximate).

† Available with grooved or female threaded outlet. Specify choice on order.

‡ Center of run to end of fitting.

Female threaded outlets are available to NPT and BSPT specifications.

@ See page 7 for Fire Protection approvals and pressure ratings.

(a) British Standard female pipe threaded outlet is available as listed. Specify "BSPT" clearly on order.

(b) For 76.1 mm threaded outlet, specify 2½" BSPT clearly on order.

§ Vds approved for fire protection services

¤ LPCB approved for fire protection services

Ø Approved for use in China by Tianjin Approvals Company.


VICTAULIC IS A REGISTERED TRADEMARK OF VICTAULIC COMPANY. © 2018 VICTAULIC COMPANY. ALL RIGHTS RESERVED.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 45 of 58


Mechanical-T® Bolted Branch Outlets

STYLES 920 AND 920N

DIMENSIONS



GROOVED OUTLET



FEMALE THREADED OUTLET

- Provides a direct branch connection at any location where a hole can be cut in the pipe
- A pressure responsive gasket provides the seal
- Request Publication 11.03 for Mechanical-T cross assemblies
- Pressure rated up to 500 psi/3450 kPa on steel pipe; also available for use with HDPE pipe
- Sizes from 2 × ½"/50 × 15 mm through 8 × 4"/200 × 100 mm

Size			Style No.	Max. Work Pressure@	Dimensions							Approx. Weight Each	
Run × Branch Nominal Size Inches mm			920 or 920N	psi kPa	Hole Diameter +0.13 -0.00	T** Inches mm	V ‡ # Thd. Inches mm	V ‡ Grv. Inches mm	W Inches mm	Y Inches mm	Z Inches mm	Female Thd. Lbs. kg	Grv. Lbs. kg
TABLE CONTINUED FROM PAGE 4													
165.1	×	1 25	920N	500 3450	1.50 38.1	3.88 99	4.56 116	—	3.79 96	9.34 237	2.75 70	8.0 3.6	—
		1 ¼¤ 32	920N	500 3450	1.75 44.5	4.43 113	5.13 130	—	3.79 96	9.34 237	3.25 83	8.4 3.8	—
		1 ½ (a) †¤ 40	920N	500 3450	2.00 50.8	4.41 112	5.13 130	5.13 130	3.79 96	9.34 237	3.25 83	8.4 3.8	5.4 2.4
		2 (a) † 50	920N	500 3450	2.50 63.5	4.38 111	5.13 130	5.13 130	3.79 96	9.34 237	3.88 99	8.5 3.9	6.0 2.7
		76.1 mm	920	500 3450	2.75 69.9	4.01 110	5.13 130	5.21 132	3.63 92	10.51 267	4.63 118	8.6 3.9	7.6 3.4
		3 (a) † ø 80	920	500 3450	3.50 88.9	4.31 110	5.50 140	5.13 130	3.63 92	10.51 267	5.31 135	10.2 4.6	8.4 3.8
		4 (a) †¤ 100	920	500 3450	4.50 114.3	3.81 97	5.75 146	5.38 137	3.63 92	10.51 267	6.25 159	10.5 4.8	8.4 3.8
8 200	×	2 (a) † 50	920	500 3450	2.75 69.9	5.44 138	6.19 157	6.25 159	4.81 122	12.42 316	4.50 114	11.6 5.3	11.6 5.3
		2½ (a) † 65	920	500 3450	2.75 69.9	5.07 129	6.19 157	6.19 157	4.81 122	12.42 316	4.50 114	11.6 5.3	11.6 5.3
		76.1 mm ¤	920	500 3450	2.75 69.9	5.25 133	—	6.25 159	4.81 122	12.42 316	4.56 116	—	11.6 5.3
		3 (a) †¤ 80	920	500 3450	3.50 88.9	5.31 135	6.50 165	6.50 165	4.81 122	12.42 316	5.31 135	12.6 5.7	11.6 5.3
		4 (a) †¤ 100	920	500 3450	4.50 114.3	4.81 122	6.75 171	6.38 162	4.81 122	12.42 316	6.25 159	15.3 6.9	12.5 5.7

** Center of run to engaged pipe end, female threaded outlet only (dimensions approximate).
† Available with grooved or female threaded outlet. Specify choice on order.
‡ Center of run to end of fitting.
# Female threaded outlets are available to NPT and BSPT specifications.
@ See page 7 for Fire Protection approvals and pressure ratings.`
(a) British Standard female pipe threaded outlet is available as listed. Specify "BSPT" clearly on order.
(b) For 76.1 mm threaded outlet, specify 2½" BSPT clearly on order.
§ Vds approved for fire protection services
¤ LPCB approved for fire protection services
Ø Approved for use in China by Tianjin Approvals Company.

IMPORTANT NOTES:

Style 920 and Style 920N housings cannot be mated to each other to achieve cross connections.


VICTAULIC IS A REGISTERED TRADEMARK OF VICTAULIC COMPANY. © 2018 VICTAULIC COMPANY. ALL RIGHTS RESERVED.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 46 of 58

Mechanical-T® Bolted Branch Outlets

STYLES 920 AND 920N

FLOW DATA



Exaggerated for clarity

Flow test data has shown that the total head loss between point (1) and (2) for the Style 920, 920N and 929 Mechanical-T® fittings can best be expressed in terms of the pressure difference across the inlet and branch. The pressure difference can be obtained from the relationship below.

C_V and Kv Values

Values for flow of water at +60°F/+16°C are shown in the table below.

Formulas for C_V /K_V Values:

$$\Delta P = \frac{Q^2}{C_v^2}$$

$$Q = C_v \times \sqrt{\Delta P}$$

Where:
Q = Flow (GPM)
ΔP = Pressure Drop (psi)
C_v = Flow Coefficient

$$\Delta P = \frac{Q^2}{K_v^2}$$

$$Q = K_v \times \sqrt{\Delta P}$$

Where:
Q = Flow (m^3/hr)
ΔP = Pressure Drop (Bar)
K_v = Flow Coefficient

OUTLET SIZE		Equivalent Length of Outlet Size Schedule 40 Carbon Steel Pipe (per UL 213, Sec. 16) (C = 120)ŧ FT		C_V/K_V Values	
NOMINAL DIAMETER In/mm	ACTUAL O.D. In/mm	GROOVED	THREADED	GROOVED	THREADED
½ 15	0.840 21.3	-	2	-	11 9.4
¾ 20	1.050 26.7	-	4	-	16 13.7
1 25	1.315 33.7	3**	8	-	21 1.8
1 ¼ 32	1.660 42.7	5 ½	6	50 42.9	48 41.1
1 ½ 40	1.900 48.3	11	11	53 45.4	53 45.4
2 50	2.375 60.3	9	10 ½	112 96	104 89.1
2 ½ 65	2.875 73.0	20	12 ½	119 102	150 128.5
76.1 mm	3.000 76.1	16*	-	161 138.1	-
3 80	3.500 88.9	14	15 ½	249 213.4	237 203.1
4 100	4.500 114.3	20	22	421 360.8	401 343.6

ŧ Hazen-Williams coefficient of friction is 120.
* Pipe with a wall thickness of 0.165in./4.2mm.
** 1" FireLock™ Innovative Groove System (IGS) outlet

VICTAULIC IS A REGISTERED TRADEMARK OF VICTAULIC COMPANY. © 2018 VICTAULIC COMPANY. ALL RIGHTS RESERVED.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 47 of 58

Mechanical-T® Bolted Branch Outlets

STYLES 920 AND 920N

FIRE PROTECTION APPROVALS AND PRESSURE RATINGS

The information provided below is based on the latest listing and approval data at the time of publication. Listings/Approvals are subject to change and/or additions by the approvals agencies. Contact Victaulic for performance on other pipe and the latest listings and approvals.

Run Size		Outlet Size	Pipe	Approval Agency Rated Working Pressures – psi/kPa					
Nominal Size Inches/mm	Actual Outside Diameter Inches/mm	Inches/mm	Schedule	UL	ULC	FM	LPCB	Vds (Style 920)	Vds (Style 920N)
21/2 - 6 65 - 150	2.875 - 6.625 73.0 - 168.3	All	10, 40	400 2755	400 2755	400 2755	290 1999	232 1599	362 2496
21/2 - 4 65 - 100	2.875 - 4.500 73.0 - 114.3	All	DF	300 2065	300 2065	300 2065	290 1999	232 1599	362 2496
21/2 - 4 65 - 100	2.875 - 4.500 73.0 - 114.3	All	SF	300 2065	300 2065	300 2065	290 1999	232 1599	362 2496
6 150	6.625 168.3	3, 4	10	300 2065	300 2065	250 1724	290 1999	232 1599	362 2496
6 150	6.625 168.3	3,4	30, 40	300 2065	300 2065	300 2065	290 1999	232 1599	362 2496
8 200	8.625 219.1	21/2	10, 40	400 2755	—	—	—	145 1000	—
8 200	8.625 219.1	3,4	10	300 2065	—	250 1724	—	145 1000	—
8 200	8.625 219.1	3,4	30, 40	300 2065	—	300 2065	—	145 1000	—

NOTES:
10 refers to Listed/Approved Schedule 10 steel sprinkler pipe.
40 refers to Listed/Approved Schedule 40 steel sprinkler pipe.
DF refers to Listed/Approved Dyna-Flow steel sprinkler pipe manufactured by American Tube Company.
SF refers to Listed/Approved Super-Flo steel sprinkler pipe manufactured by Allied Tube and Conduit Corporation.

VIC-TAP II HOLE CUTTING TOOL FOR 4 - 8"/100 - 200 MM CARBON STEEL PIPE



The Vic-Tap II hole cutting tool is designed for use with the Style 931 Vic-Tap II Mechanical-T unit, which is a combination of the Style 920 Mechanical-T and Series 726 Vic-Ball Valve. The Vic-Tap II is capable of tapping into carbon steel pipe systems under pressures up to 500 psi/3450 kPa.

The Style 931 Vic-Tap II Mechanical-T unit is a full port ball valve which can be mounted on 4"/100 mm, 5"/125 mm, 6"/150 mm and 8"/200 mm diameter pipe. The Style 931 comes with a 2 ½"/65 mm grooved outlet.

The drill motor is an electric motor with ground fault circuit interrupter (GFCI) in accordance with safety codes.

For more information, refer to publication 24.01.

VICTAULIC IS A REGISTERED TRADEMARK OF VICTAULIC COMPANY. © 2018 VICTAULIC COMPANY. ALL RIGHTS RESERVED.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 48 of 58

Mechanical-T® Bolted Branch Outlets

STYLES 920 AND 920N

INSTALLATION

Reference should always be made to the I-100 Victaulic Field Installation Handbook for the product you are installing. Handbooks are included with each shipment of Victaulic products for complete installation and assembly data, and are available in PDF format on our website at www.victaulic.com.

WARRANTY

Refer to the Warranty section of the current Price List or contact Victaulic for details.

NOTE


This product shall be manufactured by Victaulic or to Victaulic specifications. All products to be installed in accordance with current Victaulic installation/assembly instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

VICTAULIC IS A REGISTERED TRADEMARK OF VICTAULIC COMPANY. © 2018 VICTAULIC COMPANY. ALL RIGHTS RESERVED.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 49 of 53

FIG. 3201

90° Elbow





c UL us LISTED FM APPROVED

For Listings/Approval Details and Limitations, visit our website at www.anvilintl.com or contact an Anvil® Sales Representative.

FIGURE 3201 - 90° ELBOW

Nominal Size	Maximum Working Pressure▲	Dimension A	Approx. Wt. Each
In. (mm)	*PSI (kPa)*	*In. (mm)*	*Lbs. (kg)*
1 *20*	500 *3450*	1.50 *38.10*	0.62 *0.28*
1¼ *32*	500 *3450*	1.75 *44.45*	0.90 *0.41*
1½ *40*	500 *3450*	1.94 *49.276*	1.20 *0.54*
2 *50*	500 *3450*	2.25 *57.15*	1.85 *0.84*

▲ – Working Pressure Ratings are for reference only and based on Sch. 40 pipe. For the latest UL/ULC, and FM pressure ratings versus pipe schedule, please visit anvilintl.com or contact your local Anvil Representative.

MATERIAL SPECIFICATIONS

Dimensions: ASME B16.3

Material: ASTM A536 Grade 65-45-12

Finish: Black

Threads: NPT per ASME B1.20.1

Agency Approvals: All ductile iron threaded fittings are UL/ULC Listed and FM Approved.

NOTICE: Ductile iron fittings have higher tensile strength than that of steel pipe. Therefore, over tightening can cause damage to pipe threads which may cause leakage. Ductile iron fittings should be tightened approximately three turns beyond hand tight, but no more than four turns.


PROJECT INFORMATION	APPROVAL STAMP
Project:	☐ **Approved**
Address:	☐ **Approved as noted**
Contractor:	☐ **Not approved**
Engineer:	**Remarks:**
Submittal Date:	
Notes 1:	
Notes 2:	

CAST IRON THREADED FITTINGS

Class 125 (Standard)

FIGURE 351
90° Elbow





Size		A		B		Unit Weight Black	
NPS	*DN*	in	*mm*	in	*mm*	lbs	*kg*
1/4	*8*	1/2	*13*	13/16	*22*	0.16	*0.07*
3/8	*10*	9/16	*14*	15/16	*24*	0.25	*0.11*
1/2	*15*	11/16	*17*	1 1/8	*29*	0.40	*0.18*
3/4	*20*	13/16	*22*	1 15/16	*33*	0.60	*0.27*
1	*25*	15/16	*24*	1 1/2	*38*	0.92	*0.42*
1 1/4	*32*	1 1/8	*29*	1 3/4	*44*	1.44	*0.65*
1 1/2	*40*	1 5/16	*33*	1 15/16	*49*	1.95	*0.88*
2	*50*	1 9/16	*40*	2 1/4	*57*	3.13	*1.42*
2 1/2	*65*	1 13/16	*47*	2 11/16	*68*	4.94	*2.24*
3	*80*	2 3/16	*56*	3 1/8	*79*	7.21	*3.27*
3 1/2	*90*	2 7/16	*62*	3 7/16	*87*	9.67	*4.39*
4	*100*	2 11/16	*68*	3 13/16	*98*	12.17	*5.52*
5	*125*	3 5/16	*84*	4 1/2	*114*	21.46	*9.73*
6	*150*	3 7/8	*98*	5 1/8	*130*	31.33	*14.21*
8	*200*	5 3/16	*132*	6 9/16	*167*	64.56	*29.28*

Note: See following page for pressure-temperature ratings.

PROJECT INFORMATION	APPROVAL STAMP
Project:	☐ **Approved**
Address:	☐ **Approved as noted**
Contractor:	☐ **Not approved**
Engineer:	**Remarks:**
Submittal Date:	
Notes 1:	
Notes 2:	

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 51 of 53

CAST IRON THREADED FITTINGS



Anvil standard and extra heavy cast iron threaded fittings are manufactured in accordance with ASME B16.4. Plugs and bushings are manufactured in accordance with ASME B16.14.

NOTE: Figure 367 Concentric Reducers do not meet the overall length requirement of ASME B16.4. All other dimensions are in compliance.

c UL us

FM APPROVED

For Listings/Approval Details and Limitations, visit our website at www.anvilintl.com or contact an Anvil Sales Representative.

Cast Iron Threaded Fittings
Pressure - Temperature Ratings

Temperature		Pressure			
		Class 125		Class 250	
(°F)	*(°C)*	psi	*bar*	psi	*bar*
-20° to 150°	*-28.9 to 65.6*	175	*12.1*	400	*27.6*
200°	*93.3*	165	*11.4*	370	*25.5*
250°	*121.1*	150	*10.3*	340	*23.4*
300°	*148.9*	140	*9.7*	310	*21.4*
350°	*176.7*	125	*8.6*	300	*20.7*
400°	*204.4*	–	–	250	*17.2*

Standards and Specifications

	Dimensions	Material	Galvanizing*	Thread	Pressure Rating
CAST IRON THREADED FITTINGS					
Class 125	ASME B16.4	ASTM A-126 (A)	ASTM A-153	ASME B1.20.1	ASME B16.4
Class 250	ASME B16.4	ASTM A-126 (A)	ASTM A-153	ASME B1.20.1	ASME B16.4
CAST IRON PLUGS AND BUSHINGS					
	ASME B16.14	ASTM A- 126 (A)	ASTM A-153	ASME B1.20.1	ASME B16.14

* ASTM B 633. Type I, SC 4, may be supplied as alternate zinc coating per applicable ASME B16 product standard.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 52 of 53

General Assembly of Threaded Fittings

1) Inspect both male and female components prior to assembly.
   - Threads should be free from mechanical damage, dirt, chips and excess cutting oil.
   - Clean or replace components as necessary.


2) Application of thread sealant
   - Use a thread sealant that is fast drying, sets-up to a semi hard condition and is vibration resistant. Alternately, an anaerobic sealant may be utilized.
   - Thoroughly mix the thread sealant prior to application.
   - Apply a thick even coat to the male threads only. Best application is achieved with a brush stiff enough to force sealant down to the root of the threads.

3) Joint Makeup
   - For sizes up to and including 2" pipe, wrench tight makeup is considered three full turns past handtight. Handtight engagement for 1/2" through 2" thread varies from 4 1/2 turns to 5 turns.
   - For 2 1/2" through 4" sizes, wrench tight makeup is considered two full turns past handtight. Handtight engagement for 2 1/2" through 4" thread varies from 5 1/2 turns to 6 3/4 turns.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 53 of 58

FIG. 3221R

Reducing Coupling





c UL us LISTED FM APPROVED

For Listings/Approval Details and Limitations, visit our website at www.anvilintl.com or contact an Anvil® Sales Representative.

FIGURE 3221R - REDUCING COUPLING

Nominal Size	Maximum Working Pressure▲	Dimension A	Approx. Wt. Each
In. (mm)	*PSI (kPa)*	*In. (mm)*	*Lbs. (kg)*
1 x ½ *25 x 15*	500 *3450*	1.69 *42.92*	0.39 *0.18*
1 x ¾ *25 x 20*	500 *3450*	1.69 *42.92*	0.53 *0.24*
1¼ x ¾ *32 x 20*	500 *3450*	2.06 *52.32*	0.64 *0.29*

▲ – Working Pressure Ratings are for reference only and based on Sch. 40 pipe. For the latest UL/ULC, and FM pressure ratings versus pipe schedule, please visit anvilintl.com or contact your local Anvil Representative.

MATERIAL SPECIFICATIONS

Dimensions: ASME B16.3

Material: ASTM A536 Grade 65-45-12

Finish: Black

Threads: NPT per ASME B1.20.1

Agency Approvals: All ductile iron threaded fittings are UL/ULC Listed and FM Approved.

NOTICE: Ductile iron fittings have higher tensile strength than that of steel pipe. Therefore, over tightening can cause damage to pipe threads which may cause leakage. Ductile iron fittings should be tightened approximately three turns beyond hand tight, but no more than four turns.

PROJECT INFORMATION	APPROVAL STAMP
Project:	☐ **Approved**
Address:	☐ **Approved as noted**
Contractor:	☐ **Not approved**
Engineer:	**Remarks:**
Submittal Date:	
Notes 1:	
Notes 2:	

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 54 of 58

B3034 - C-Clamp

Size Range: 3/8"-16 thru 3/4"-10 rod

Material: Cast Malleable Steel with hardened cup point set screw and jam nut

Function: Recommended for hanging from steel beam where flange thickness does not exceed 3/4" (19.0mm).


Features: May be used on top or bottom flange of the beam. Beveled lip allows hanging from top flange where clearance is limited. May be installed with the set screw in the up or down position. Offset design permits unlimited rod adjustment by allowing the rod to be threaded completely through the clamp. The rear window design permits inspection of thread engagement.


Approvals: Underwriters Laboratories Listed **(cULus)** and Factory Mutual Engineering Approved **(FM)** for 3/8"-16 and 1/2"-13 rod sizes. Conforms to Federal Specification WW-H-171E & A-A-1192A, Type 23 and Manufacturers Standardization Society ANSI/MSS SP-69 & SP-58, Type 19.
3/8"-16 is **(cULus)** Listed to support up to 4" (100mm) pipe with the set screw in the down position, up to 3" (75mm) pipe with the set screw in the up position.
1/2"-13 is **(cULus)** Listed to support up to 8" (200mm) pipe with the set screw in the down position, up to 6" (150mm) pipe with the set screw in the up position.
Factory Mutual Engineering Approved only with the setscrew in the down position.


Finish: Plain. Contact customer service for alternative finishes and materials.


Order By: Figure number, rod size and finish

Setscrew Torque: Per MSS SP-58 14.2.5
3/8" -16 set screws = 5 ft./lbs. (7 Nm)
1/2" -13 set screws = 11 ft./lbs. (15 Nm)
Caution should be taken not to over-tighten set screws.

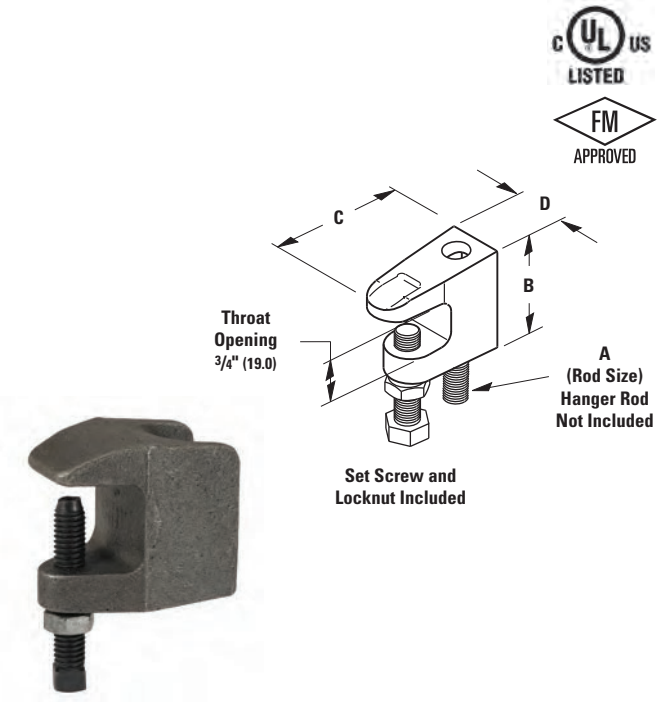

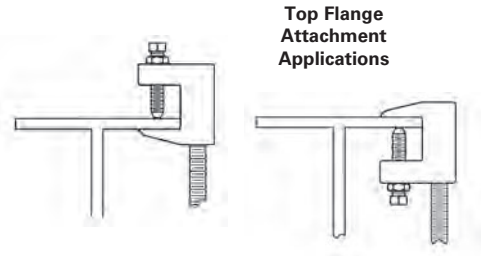

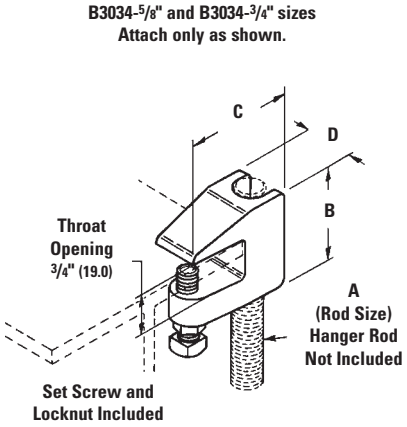

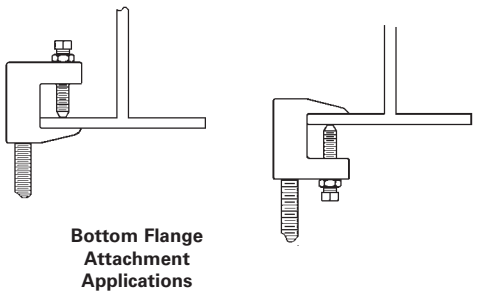

Part No.	Rod Size A	Set Screw Size	B in.	B (mm)	C in.	C (mm)	D in.	D (mm)	Maximum Iron Pipe Size Per UL in.	Maximum Iron Pipe Size Per UL (mm)	Approx. Wt./100 Lbs.	Approx. Wt./100 (kg)
B3034-3/8	3/8"-16	3/8"-16 x 1 1/2"	1 5/8"	(41.3)	2"	(50.8)	7/8"	(19.0)	4"	(100)	30	(13.6)
B3034-1/2	1/2"-13	1/2"-13 x 1 1/2"	1 13/16"	(46.0)	2 3/16"	(55.6)	1 3/16"	(30.2)	8"	(200)	47	(21.3)
B3034-5/8	5/8"-11	1/2"-13 x 2"	1 3/4"	(44.5)	2 1/8"	(54.0)	1 1/4"	(31.7)	--	--	58	(26.3)
B3034-3/4	3/4"-10	1/2"-13 x 2"	2"	(50.8)	2 1/4"	(57.2)	1 1/4"	(31.7)	--	--	77	(35.0)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.

RSN: 1596341
Permit # 2021-20379558-CT
Sheet 55 of 58

TOLCO™ Fig. 68S - Reversible Malleable Beam Clamp 3/4" (19.0mm) Throat Opening
TOLCO™ Fig. 68W - Reversible Malleable Beam Clamp 1 1/4" (31.7mm) Throat Opening

Size Range: 3/8"-16 rod sizes thru 7/8"-9 rod sizes

Material: Cast Malleable Steel with hardened cup point set screw and jam nut

Function: Recommended for hanging from steel beam where flange thickness does not exceed 3/4" (19.0mm) on Fig. 68S or 1 1/4" (31.7mm) on Fig.68W.

Features: May be used on top or bottom flange of beam. Beveled lip allows hanging from top flange where clearance is limited. May be installed with set screw in up or down position. Offset design permits unlimited rod adjustment by allowing the rod to be threaded completely through the clamp. The rear window design permits inspection of thread engagement.

Approvals: Factory Mutual Engineering Approved. Underwriters Laboratories Listed. Conforms to Federal Specification WW-H-171E, Type 23 and Manufacturers Standardization Society SP-58, Type 19.
Fig. 68S-3/8 is **cULus** Listed to support up to 4" (100mm) pipe with the set screw in the down position and up to 3" (80mm) pipe with the set screw in the up position.
Fig. 68S-1/2 is **cULus** Listed to support up to 8" (200mm) pipe with the set screw in the down position and up to 6" (150mm) pipe with the set screw in the up position.
Fig. 68W-3/8 is **cULus** Listed to support up to 4" (100mm) pipe with the set screw in the down position and up to 4" (100mm) pipe with the set screw in the up position.
Fig. 68W-1/2 is **cULus** Listed to support up to 6" (150mm) pipe with the set screw in the down position and up to 6" (150mm) pipe with the set screw in the up position.
Factory Mutual Engineering Approved **(FM)** only with the set screw in the down position.

Finish: Plain. Contact customer service for Electro-Galvanized or HDG finishes.

Order By: Part number and finish

Setscrew Torque: Per MSS SP-58 14.2.5
3/8" -16 set screws = 5 ft./lbs. (7 Nm)
1/2" -13 set screws = 11 ft./lbs. (15 Nm)
5/8" -11 set screws = 21 ft./lbs. (28 Nm)
Caution should be taken not to over-tighten set screws.

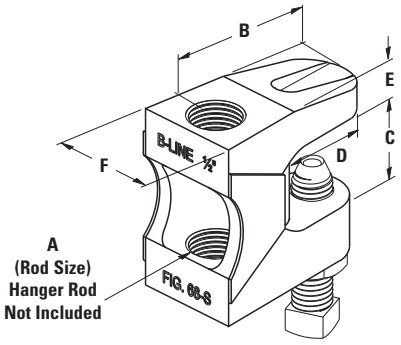


Fig. 68S

Set Screw and Locknut Included

D = Depth of Throat

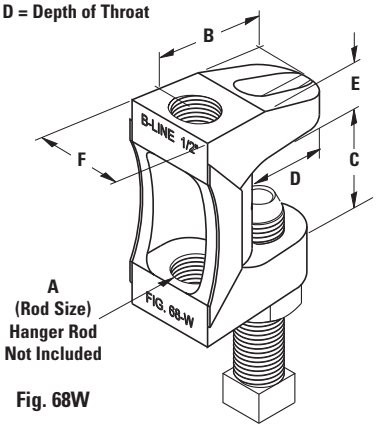


Fig. 68W

Set Screw and Locknut Included

Fig. 68S



Fig. 68W



Fig. 68S

Part No.	Rod Size A	B in.	B (mm)	C Min. in.	C Min. (mm)	D in.	D (mm)	E in.	E (mm)	F in.	F (mm)	Max Rec. Load Set Screw Up Lbs.	Max Rec. Load Set Screw Up (kN)	Max Rec. Load Set Screw Down Lbs.	Max Rec. Load Set Screw Down (kN)	Approx. Wt./100 Lbs.	Approx. Wt./100 (kg)
68S-3/8	3/8"-16	1 9/16"	(39.7)	3/4"	(19.0)	1 1/8"	(28.6)	7/16"	(11.1)	7/8"	(22.2)	610	(2.71)	610	(2.71)	32	(14.5)
68S-1/2	1/2"-13	1 5/8"	(41.3)	3/4"	(19.0)	1"	(25.4)	7/16"	(11.1)	1 1/8"	(28.6)	750	(3.33)	1130	(5.02)	54	(24.5)
68S-5/8	5/8"-11	1 9/16"	(39.7)	3/4"	(19.0)	1"	(25.4)	9/16"	(14.3)	1 1/8"	(28.6)	750	(3.33)	1130	(5.02)	50	(22.7)
68S-3/4	3/4"-10	1 3/4"	(44.4)	3/4"	(19.0)	1 1/8"	(28.6)	9/16"	(14.3)	1 1/4"	(31.7)	750	(3.33)	1130	(5.02)	81	(36.7)
68S-7/8	7/8"-9	1 3/4"	(44.4)	3/4"	(19.0)	1 1/8"	(28.6)	9/16"	(14.3)	1 5/16"	(33.3)	750	(3.33)	1130	(5.02)	75	(34.0)

Fig. 68W

Part No.	Rod Size A	B in.	B (mm)	C Min. in.	C Min. (mm)	D in.	D (mm)	E in.	E (mm)	F in.	F (mm)	Max Rec. Load Set Screw Up Lbs.	Max Rec. Load Set Screw Up (kN)	Max Rec. Load Set Screw Down Lbs.	Max Rec. Load Set Screw Down (kN)	Approx. Wt./100 Lbs.	Approx. Wt./100 (kg)
68W-3/8	3/8"-16	1 9/16"	(39.7)	1 1/4"	(31.7)	1 1/8"	(28.6)	7/16"	(11.1)	7/8"	(22.2)	610	(2.71)	610	(2.71)	41	(18.6)
68W-1/2	1/2"-13	1 9/16"	(39.7)	1 1/4"	(31.7)	1"	(25.4)	5/8"	(15.9)	1 1/8"	(28.6)	750	(3.33)	1130	(5.02)	66	(29.9)
68W-5/8	5/8"-11	1 1/2"	(38.1)	1 1/4"	(31.7)	1"	(25.4)	9/16"	(14.3)	1 1/8"	(28.6)	750	(3.33)	1130	(5.02)	68	(30.8)
68W-3/4	3/4"-10	1 3/4"	(44.4)	1 1/4"	(31.7)	1 1/8"	(28.6)	3/8"	(19.5)	1 1/4"	(31.7)	750	(3.33)	1130	(5.02)	110	(49.9)
68W-7/8	7/8"-9	1 3/4"	(44.4)	1 1/4"	(31.7)	1 1/8"	(28.6)	9/16"	(14.3)	1 5/16"	(33.3)	750	(3.33)	1130	(5.02)	98	(44.4)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.

RSN: 1596341
Permit # 2021-2087958-CT
Sheet 56 of 58

TOLCO™ Fig. 65 - Reversible Steel C-Type Beam Clamp 3/4" (19.0mm) Throat Opening

Size Range:

Fig. 65 - 1/2"-13 rod sizes, and 5/8"-11 rod sizes
Fig. 65XT - 3/8"-16 rod size (see below)

Material: Steel with hardened cup point set screw and jam nut

Function: Recommended for hanging from steel beam where flange thickness does not exceed 3/4" (19.0mm).


Features: All steel construction eliminates structural deficiencies associated with casting type beam clamps. May be used on top or bottom flange of beam. (Beveled lip allows hanging from top flange where clearance is limited.) May be installed with set screw in up or down position. Offset design permits unlimited rod adjustment by allowing the rod to be threaded completely through the clamp. Open design permits inspection of thread engagement.

Approvals: Underwriters Laboratories Listed in the USA **(UL)** and Canada **(cUL).** Exceeds requirements of the National Fire Protection Association **(NFPA)**, pamphlet 13,
3/8"-16 rod will support 1/2" (15mm) thru 4" (100mm) pipe
1/2"-13 rod will support thru 8" (200mm) pipe

Finish: Plain or Electro-Galvanized. Contact customer service for alternative finishes and materials.

Order By: Figure number and finish

Fig. 65 Patent #4,570,885

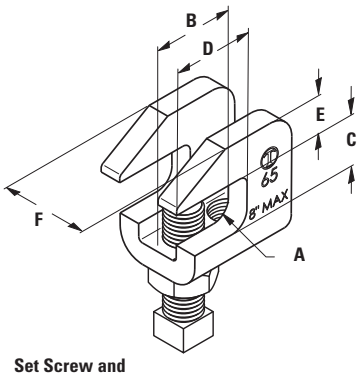

Set Screw and Locknut Included





Part No.	Rod Size A	B in.	B (mm)	C in.	C (mm)	D in.	D (mm)	E in.	E (mm)
65-1/2	1/2"-13	1 1/2"	(38.1)	3/4"	(19.0)	1"	(25.4)	9/16"	(14.3)
65-5/8	5/8"-11	1 1/2"	(38.1)	3/4"	(19.0)	1"	(25.4)	9/16"	(14.3)

Part No.	F in.	F (mm)	Approx. Wt./100 Lbs.	Approx. Wt./100 (kg)
65-1/2	1 1/4"	(31.7)	55	(24.9)
65-5/8	1 1/4"	(31.7)	55	(24.9)

TOLCO™ Fig. 65XT - Reversible Steel C-Type Beam Clamp 3/4" (19.0mm) Throat Opening


Feature: Extruded holes allows for more thread engagement of threaded rod and set screw.

Finish: Plain or Electro-Galvanized

Order By: Figure number and finish

Approvals: Underwriters Laboratories Listed **(cULus)** and FM Approved **(FM)** for up to 4" (100mm) pipe.

Designed to meet or exceed requirements of FM DS 2-0 and NFPA 13.

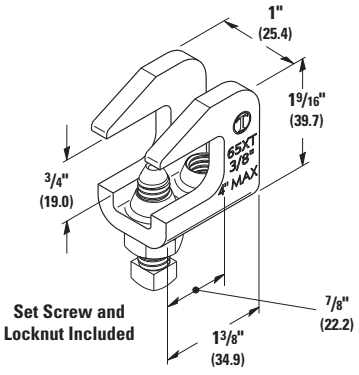

Set Screw and Locknut Included



Part No.	For Rod Size	Approx. Wt./100 Lbs.	Approx. Wt./100 (kg)
65XT	3/8"-16	28.0	(12.7)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.

RSN: 1596341
Permit # 2023-2037958-GT
Sheet 57 of 58

TOLCO™ Fig. 66 - Reversible Steel C-Type Beam Clamp 1 1/4" (31.7mm) Throat Opening

Size Range: 3/8"-16, 1/2"-13 rod sizes, and 5/8"-11 rod sizes

Material: Steel with hardened cup point set screw and jam nut


Function: Recommended for hanging from steel beam where flange thickness does not exceed 1 1/4" (31.7mm).

Features: All steel construction eliminates structural deficiencies associated with casting type beam clamps. May be used on top or bottom flange of beam. (Beveled lip allows hanging from top flange where clearance is limited.) May be installed with set screw in up or down position. Offset design permits unlimited rod adjustment by allowing the rod to be threaded completely through the clamp. Open design permits inspection of thread engagement.

Approvals: Underwriters Laboratories Listed in the USA **(UL)** and Canada **(cUL).** Exceeds requirements of the National Fire Protection Association **(NFPA**), pamphlet 13,
3/8"-16 rod will support 1/2" (15mm) thru 4" (100mm) pipe
1/2"-13 rod will support thru 8" (200mm) pipe

Finish: Plain or Electro-Galvanized. Contact customer service for alternative finishes and materials.

Order By: Figure number and finish

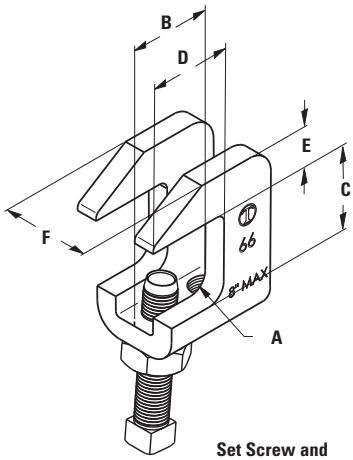

Set Screw and Locknut Included





Part No.	Rod Size A	B in.	B (mm)	C in.	C (mm)	D in.	D (mm)	E in.	E (mm)
66-3/8	3/8"-16	1 3/16"	(30.2)	1 1/4"	(31.7)	1"	(25.4)	7/16"	(11.1)
66-1/2	1/2"-13	1 1/2"	(38.1)	1 1/4"	(31.7)	1"	(25.4)	9/16"	(14.3)
66-5/8	5/8"-11	1 1/2"	(38.1)	1 1/4"	(31.7)	1"	(25.4)	9/16"	(14.3)

Part No.	F in.	F (mm)	Approx. Wt./100 Lbs.	Approx. Wt./100 (kg)
66-3/8	1"	(25.4)	28	(12.7)
66-1/2	1 1/4"	(31.7)	55	(24.9)
66-5/8	1 1/4"	(31.7)	55	(24.9)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.

RSN: 1596341
Permit # 2021-2083958-CT
Sheet 58 of 58

TOLCO™ Fig. 200 - "Trimline" Adjustable Band Hanger
TOLCO™ Fig. 200F - "Trimline" Adjustable Band Hanger with Felt Lining for Copper Tubing
TOLCO™ Fig. 200C - "Trimline" Adjustable Band Hanger with Plastic Coated
TOLCO™ Fig. 200S - "Trimline" Adjustable Band Hanger with Removable Nut (For sizes 1" thru 2")

Size Range:
Fig. 200 - 1/2" (15mm) thru 8" (200mm) pipe

Material: Steel, Pre-Galvanized

Function: For fire sprinkler and other general piping purposes. Knurled swivel nut design permits hanger adjustment after installation.

Features:

- 1/2" (15mm) thru 2" (50mm) sizes have flared edges for ease of installation on all pipe types and protects CPVC plastic pipe from abrasion. Captured knurled nut design (flared top) on 1" thru 2" sizes keep nut from separating with hanger. Hanger is easily installed around pipe.
- 1/2" (15mm), 3/4" (20mm), and 2 1/2" (65mm) thru 8" (200mm)) Spring tension on nut holds it securely in hanger before installation. Knurled nut is easily removed.
- For 1/2" (15mm) and 3/4" (20mm) sizes with non-captured knurl nuts order Fig. 200S

Approvals: Underwriters Laboratories listed (1/2" (15mm) thru 8" (200mm)) in the USA **(UL)** and Canada **(cUL)** for steel and CPVC plastic pipe and Factory Mutual Engineering Approved **(FM)** (3/4" (20mm) thru 8" (200mm)). Conforms to Federal Specifications WW-H-171E & A-A-1192A, Type 10 and Manufacturers Standardization Society ANSI/MSS SP-69 & SP-58, Type 10.

Maximum Temperature: 650°F (343°C)

Finish: Pre-Galvanized. Stainless Steel materials will be supplied with (2) hex nuts in place of a knurl nut.

Order By: Part number and pipe size

**** Note:** For metric hanger rod sizes add the metric rod size to the figure number. Example: 200M8-1 1/2 or 200M10-1 1/2

A
Overall Height
B
Center of pipe to top of knurled hanger rod nut.
D
Top of pipe to bottom of hanger rod nut.

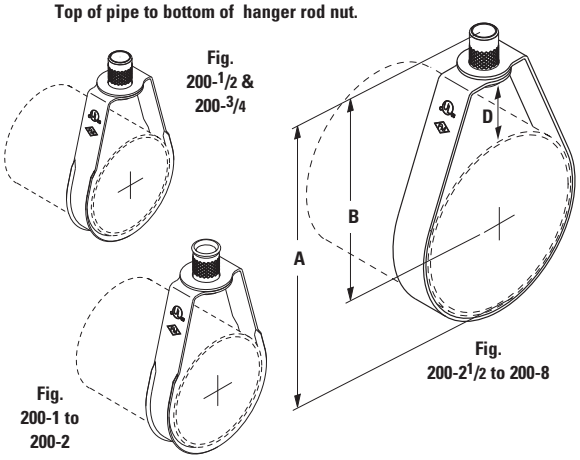




Fig. 200C
200C-1 1/2 shown



Fig. 200F
200F-1 1/2 shown



Fig. 200
shown with captured nut
1" thru 2" sizes only



Fig. 200 & Fig. 200S
shown with
non-captured nut

Part No.**	Pipe Size in.	(mm)	Rod Size in.	mm**	A in.	(mm)	B in.	(mm)	D in.	(mm)	Max. Rec. Load lbs.	(kN)	Approx. Wt./100 lbs.	(kg)
200-1/2	1/2"	(15)	3/8"-16	M8 or M10	3 1/8"	(79.4)	2 5/8"	(66.7)	1 11/32"	(34.1)	400	(1.78)	11	(5.0)
200-3/4	3/4"	(20)	3/8"-16	M8 or M10	3 1/8"	(79.4)	2 1/2"	(63.5)	1 1/16"	(27.0)	400	(1.78)	11	(5.0)
200-1	1"	(25)	3/8"-16	M8 or M10	3 3/8"	(85.7)	2 5/8"	(66.7)	1 1/8"	(28.6)	400	(1.78)	12	(5.5)
200-1 1/4	1 1/4"	(32)	3/8"-16	M8 or M10	3 3/4"	(94.0)	2 7/8"	(73.0)	1 5/32"	(29.3)	400	(1.78)	13	(5.9)
200-1 1/2	1 1/2"	(40)	3/8"-16	M8 or M10	3 7/8"	(98.4)	2 7/8"	(73.0)	1 3/16"	(30.2)	400	(1.78)	14	(6.4)
200-2	2"	(50)	3/8"-16	M8 or M10	4 1/2"	(114.3)	3"	(76.3)	1 3/16"	(30.2)	400	(1.78)	15	(6.9)
200-2 1/2	2 1/2"	(65)	3/8"-16	M10	5 5/8"	(142.9)	4 1/8"	(104.7)	1 7/16"	(36.5)	600	(2.67)	27	(12.3)
200-3	3"	(75)	3/8"-16	M10	5 7/8"	(149.1)	4"	(101.6)	1 1/4"	(31.7)	600	(2.67)	29	(13.3)
200-3 1/2	3 1/2"	(90)	3/8"-16	M10	7 3/8"	(187.3)	5 1/4"	(133.3)	2 3/16"	(55.6)	600	(2.67)	34	(15.6)
200-4	4"	(100)	3/8"-16	M10	7 3/8"	(187.3)	5"	(127.0)	1 3/8"	(34.9)	1000	(4.45)	35	(16.0)
200-5	5"	(125)	1/2"-13	M12	9 1/8"	(231.8)	6 1/4"	(158.7)	3 11/32"	(84.9)	1250	(5.56)	66	(30.2)
200-6	6"	(150)	1/2"-13	M12	10 1/8"	(257.2)	6 3/4"	(171.4)	2 7/32"	(56.3)	1250	(5.56)	73	(33.4)
200-8	8"	(200)	1/2"-13	M12	13 1/8"	(333.4)	8 3/4"	(222.2)	3 7/32"	(81.7)	1250	(5.56)	136	(62.3)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.